


Perovskite solar cells hit 21.1 percent efficiency and record reproducibility

March 17 2016

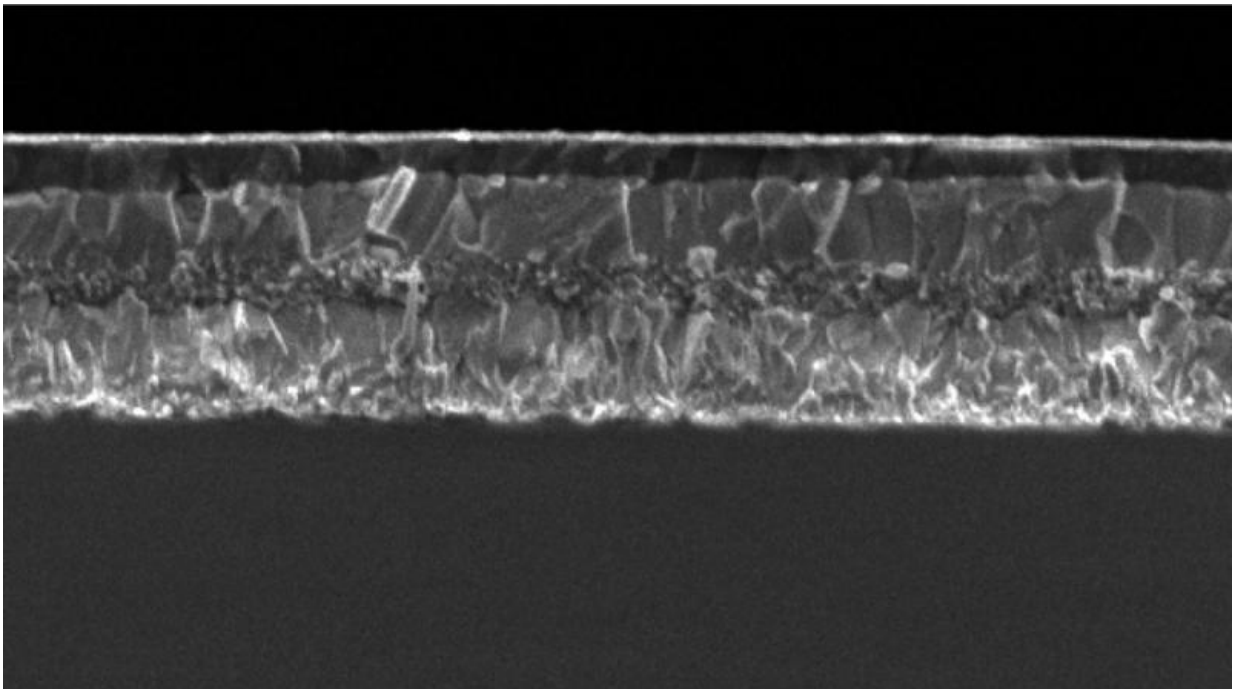

Microscope image of a triple-cation perovskite film. Credit: M. Grätzel/EPFL

EPFL scientists achieve the highest yet reproducibility for perovskite solar cells combined with a boundary-pushing 21.1% efficiency at normal operating conditions.

Perovskite [solar cells](#) hold much promise for cost-effective solar energy. However, heat [stability](#) is an issue. This has been addressed by mixing

perovskite materials with inorganic [cesium](#) to improve the solar cell's thermal and structural stability. Using this approach, EPFL scientists have now developed a cesium-containing perovskite solar cell that has achieved efficiency of 21.1%, as well as record-level reproducibility. The work is published in *Energy and Environmental Science*.

The research was carried out by Michael Grätzel's lab at EPFL, who already achieved 20.2% efficiency earlier in 2016. This time, they set out to address the problem of thermal stability, which can significantly limit the efficiency of a solar cell in the long term.

Because of their enormous potential for the future of photovoltaics, perovskite solar cells are under immense research, and thermal stability has been addressed with the addition of cesium. But this poses two problems: First, the resulting inorganic cesium lead trihalide perovskite (CsPbBr_3) does not offer an ideal band gap for photovoltaics. This means that it requires too much energy to excite bound electrons enough to free them so that they can flow as electrical current.

The second problem of using cesium is that, at room temperature, it forms crystals that do not respond to light. In fact, the cesium mixture is only stable at temperatures above 300°C.

Consequently, the pure perovskite compounds fall prey to thermal or structural instabilities. However, the perovskite phase of CsPbI_3 offers a more suitable band gap, and as such is being thoroughly investigated. One approach, called the "antisolvent method", uses mixed cations and halides.

In the EPFL study, led by postdoc Michael Saliba, the researchers used for the first time a mixture of a triple cation (Cs/MA/FA). The new films are more thermally stable and less affected by fluctuating surrounding variables such as temperature, solvent vapors or the heating

protocol used for the device. But more importantly, they show stabilized power-conversion efficiencies of 21.1% and outputs at 18% under operational conditions, even after 250 hours.

"This is an absolute breakthrough," says Michael Saliba. "These properties are crucial for commercializing perovskite photovoltaics, especially since reproducibility and stability are the main requirements for cost-effective large-scale manufacturing of [perovskite solar cells](#)."

More information: Michael Saliba et al. Cesium-containing Triple Cation Perovskite Solar Cells: Improved Stability, Reproducibility and High Efficiency, *Energy Environ. Sci.* (2016). [DOI: 10.1039/C5EE03874J](#)

Provided by Ecole Polytechnique Federale de Lausanne

Citation: Perovskite solar cells hit 21.1 percent efficiency and record reproducibility (2016, March 17) retrieved 20 March 2024 from <https://techxplore.com/news/2016-03-perovskite-solar-cells-percent-efficiency.html>

<p>This document is subject to copyright. Apart from any fair dealing for the purpose of private study or research, no part may be reproduced without the written permission. The content is provided for information purposes only.</p>
--