


Engineers on a roll toward smaller, more efficient radio frequency transformers

May 14 2018, by Lois Yoksoulian

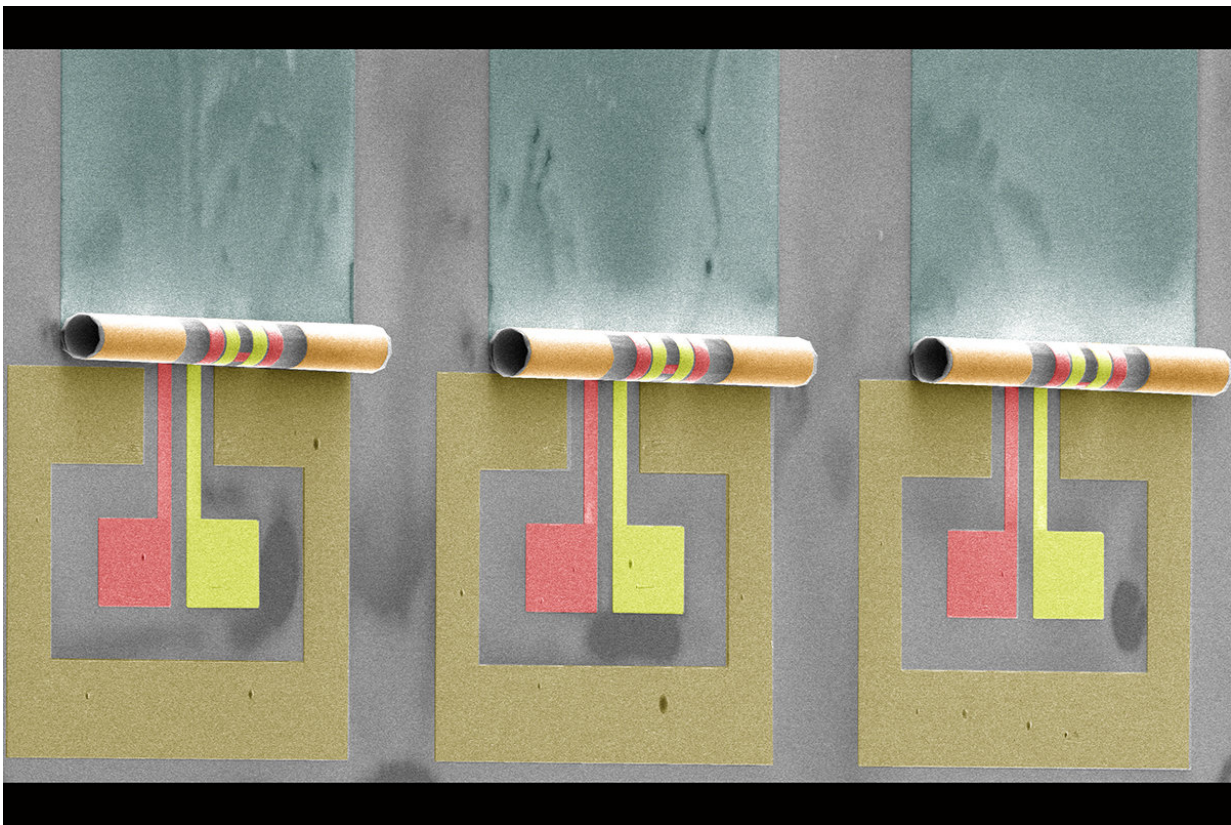

Illinois engineers roll toward smaller, more efficient radio frequency transformers that take 10 to 100 times less space on a microchip. Credit: Wen Huang

The future of electronic devices lies partly within the "internet of

things—the network of devices, vehicles and appliances embedded within electronics to enable connectivity and data exchange. University of Illinois engineers are helping realize this future by minimizing the size of one notoriously large element of integrated circuits used for wireless communication—the transformer.


Three-dimensional rolled-up radio frequency transformers take 10 to 100 times less space, perform better when the power transfer ratio increases and have a simpler fabrication process than their 2-D progenitors, according to a paper detailing their design and performance in the journal *Nature Electronics*.

"Transformers are one of the largest and heaviest elements on any circuit board," said principal investigator Xiuling Li, a professor of electrical and computer engineering. "When you pick up an LED light bulb, it feels heavy for its size and that is in part because of the bulky transformer inside. The size of these transformers may become a key obstacle to overcome in the future for wireless communication and IoT."

Transformers use coiled wires to convert input signals to specific output signals for use in devices like microchips. Previous researchers have developed some radio frequency transformers using a stacked conducting material to solve the space problem, but these have limited performance potential. This limited performance is due to inefficient magnetic coupling between coils when they have a high turns ratio, meaning that the primary coil is much longer than the secondary coil, or vice versa, Li said. These stacked transformers need to be made using special materials and are difficult to fabricate, bulky and unbendable—things that are far from ideal for internet of things devices.

The new transformer design uses techniques Li's group previously developed for making rolled inductors. "We are making 3-D structures using 2-D processing," Li said. The team deposits carefully patterned

metal wires onto stretched 2-D thin films. Once they release the tension, the 2-D films self-roll into tiny tubes, allowing the primary and secondary wires to coil and nest perfectly inside each other into a much smaller area for optimum magnetic induction and coupling.

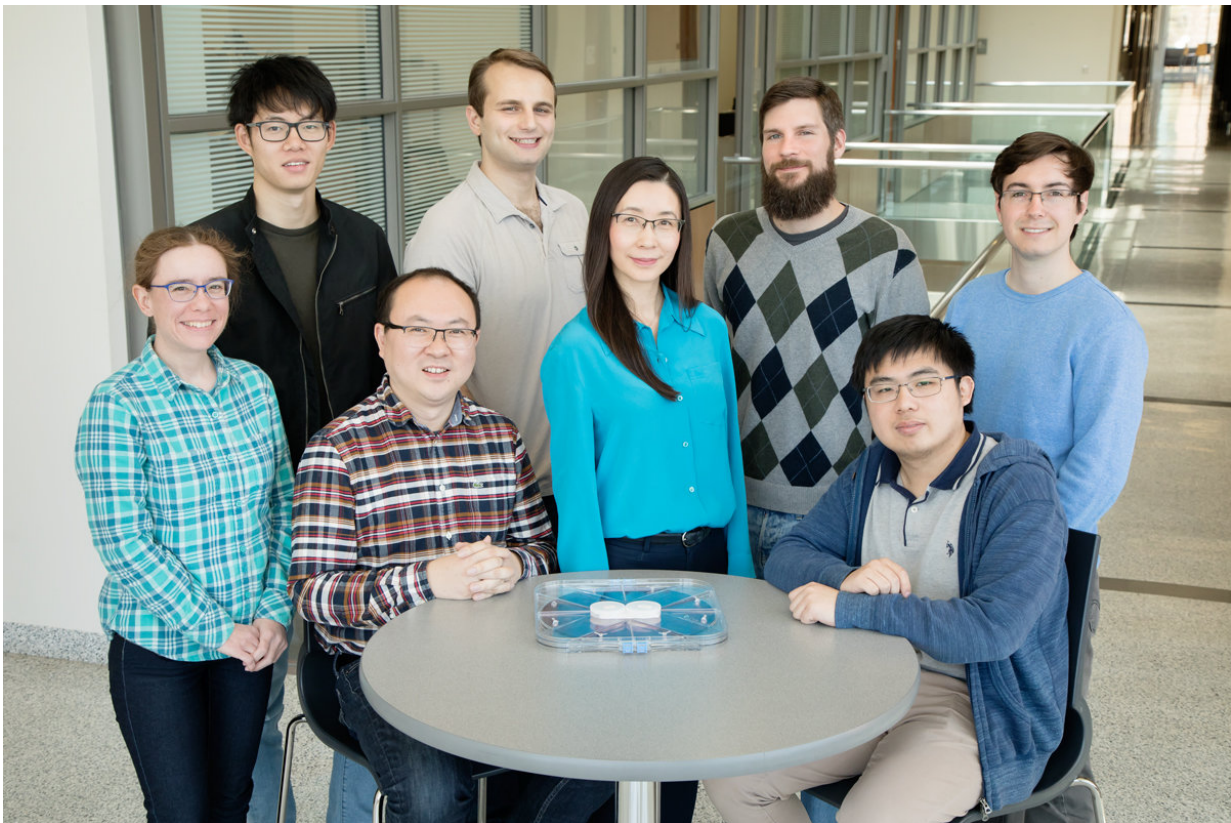

Illinois engineers Wen Huang, front left, professor Xiuling Li, Jingchao Zhou, Kathy Walsh, second row left, Siyu Liu, Julian Michaels, Paul Froeter and Mark Kraman. Credit: L. Brian Stauffer

The nested 3-D architecture leads to high turns ratio coils, Li said. "A high turns ratio transformer can be used as an impedance transformer to improve the sensitivity of extremely low power receivers, which are expected to be a key enabler for IoT wireless front ends," said electrical

and computer engineering professor and co-author Songbin Gong.

Rolled transformers can also receive and process higher frequency signals than the larger devices.

"Wireless communication will be faster and use higher-frequency signals in the future. The current generation of radio frequency transformers simply cannot keep up with the miniaturization requirements and high-frequency operation of the future," said lead author and postdoctoral researcher Wen Huang. "Smaller transformers with more turns allow for better reception of faster, high-frequency wireless signals, as well as high-level integration in IoT applications."

The new transformers have a robust fabrication process—stable beyond standard foundry temperatures and compatible with industry-standard materials. This study used gold wire, but the team has successfully demonstrated the fabrication of their rolled devices using industry-standard copper.

"The next step will be to use thinner and more-conductive metal such as graphene, allowing these devices to be made even smaller and more flexible. This advancement may make it possible for the devices to be woven into the fabrics of high-tech wearables," Li said.

More information: Wen Huang et al. Three-dimensional radio-frequency transformers based on a self-rolled-up membrane platform, *Nature Electronics* (2018). [DOI: 10.1038/s41928-018-0073-5](https://doi.org/10.1038/s41928-018-0073-5)

Provided by University of Illinois at Urbana-Champaign

Citation: Engineers on a roll toward smaller, more efficient radio frequency transformers (2018,

May 14) retrieved 27 January 2023 from <https://techxplore.com/news/2018-05-smaller-efficient-radio-frequency.html>

This document is subject to copyright. Apart from any fair dealing for the purpose of private study or research, no part may be reproduced without the written permission. The content is provided for information purposes only.