


# What's causing the voltage fade in lithium-rich NMC cathode materials?

July 16 2018

---

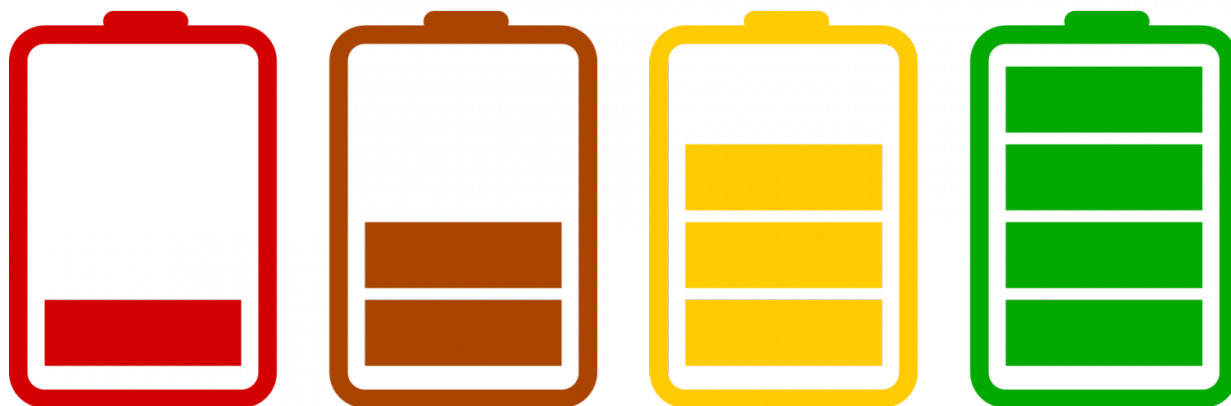

Credit: CC0 Public Domain

Researchers led by a University of California San Diego team have published work in the journal *Nature Energy* that explains what's causing the performance-reducing "voltage fade" that currently plagues a promising class of cathode materials called Lithium-rich NMC (nickel magnesium cobalt) layered oxides.

These [cathode materials](#) have garnered considerable attention over the

years as promising components for better rechargeable batteries for electric vehicles.

After a battery goes through a series of charge-discharge cycles, its [voltage](#) fades and the amount of energy it can hold, and release later for use, also fades. The new research explains why this happens in Lithium-rich NMC cathode materials. In particular, the researchers identified nanoscale defects or dislocations in Lithium-rich NMC cathode materials as the batteries charged at a range of voltages going up to 4.7 volts.

"The dislocations are extra atomic layers that don't fit into the otherwise perfectly periodic crystal structure," said Andrej Singer, the lead author who performed this work as a postdoctoral researcher at UC San Diego. "Discovering these dislocations was a big surprise: if anything, we expected the extra atomic layers to occur in a completely different orientation," said Singer, who is now on the faculty at Cornell University. By combining experimental evidence with theory, the research team concluded that the nucleation of this specific type of dislocation results in voltage fade.

Knowing the origin of voltage fade, the team showed that heat treating the cathode materials eliminated most of the defects and restored the original voltage. They put the heat-treated cathodes into new batteries and tested them at a range of voltages going up to 4.7 volts, demonstrating that the voltage fade had been reversed.

While the heat treating approach to reversing the defects is labor intensive and not likely to scale, the physics and materials science-based approach to characterizing and then addressing the nano-scale defects offers promise for finding new solutions to the voltage fade problem.

"Our paper is mainly about unlocking the mystery of the dislocations

that cause voltage fade in Lithium-rich NMCs. We don't have a scalable solution yet to solving the voltage fade problem in Lithium-rich NMCs, but we are making progress," said UC San Diego nanoengineering professor Shirley Meng. She and UC San Diego Physics professor Oleg Shpyrko are the senior authors on the new *Nature Energy* paper.

"One of the most serious problems for lithium-rich NMC cathode materials is voltage fade," said paper author Minghao Zhang, a recent graduate of the nanoengineering Ph.D. program at UC San Diego Jacobs School of Engineering, where he is now a postdoctoral researcher.

Voltage fade reduces the energy density of the battery, which in turn limits the practical applications of these materials despite their high energy density in the initial charge-discharge cycles.

"Our work for the first time clearly demonstrates that defect generation and defect accumulation in the structure of Lithium-rich NMC materials are the origin of voltage fade," said Zhang. "Based on this explanation, we designed a heat treatment regime and then showed that the heat treatments removed the defects in the bulk structure and restored the battery output voltage."

## **Pinning Down Battery Details**

"Engineering solutions have to be based on solid science. If you don't know what's going on, then your mitigation strategies are less effective. And I think that is what has hindered this material," said UC San Diego nanoengineering professor Shirley Meng, referring to the long-standing lack of clarity on what is happening at the nano-scale that is causing the voltage fade in these promising cathode materials.

Meng, Shpyrko and their respective labs and collaborators are uniquely adept at imaging, characterizing and calculating what is happening to

batteries, at the nanoscale, while they are charging. Their combined expertise allows the team to glean unprecedented insights from X-ray imaging data of batteries while they are charging.

"Being able to directly image the structure of materials and devices under operating conditions and with nanoscale resolution is one of the grand challenges in our quest to design and discover new functional materials," said UC San Diego physics professor Oleg Shpyrko. "Our group's efforts in developing novel X-ray imaging techniques are targeted towards fundamental understanding and ultimately control of defect formation. Our *in-operando* imaging studies indicate novel ways of mitigating voltage fade in next-generation energy storage materials."

This collaboration is part of the interdisciplinary work of the UC San Diego Sustainable Power and Energy Center, where Shirley Meng serves as Director, and Oleg Shpyrko serves as Co-Director. Research at the [Sustainable Power and Energy Center](#) extends from theoretical research through experiments and materials characterization all the way to real-world testing of devices on the campus microgrid.

## Research Details

In the *Nature Energy* paper, the authors write: "We directly capture the nucleation of a dislocation network in primary nanoparticles of a high capacity LRLO material [a Lithium-rich NMC cathode] during electrochemical charge. Based on the discovery of defect formation and first principles calculations, we identify the origin of the voltage fade, allowing us to design and experimentally demonstrate an innovative treatment to restore voltage in LRLO."

The *in situ* Bragg coherent diffractive imaging technique, performed at the Argonne National Lab, allows the researchers to directly image the interior of a nanoparticle during battery charge. The team's analyses and

reconstructions of these data offer unprecedented insights into what is actually happening while batteries are charging. The researchers performed a number of observational studies while battery materials were charging across a range of voltages going from 4 volts up to 4.7 volts. At 4.4 volts, the researchers identified a series of defects including edge, screw and mixed dislocations.

The researchers also studied currently-commercialized non-lithium-rich NMC materials and found defects, but significantly fewer; and no new defects occurred above 4.2 volts in the non-lithium-rich NMC materials.

"With this publication, we are hoping to open up a new paradigm for materials scientists to rethink how to design and optimize this class of materials for energy storage. It still requires a lot more work and many contributions from the field to finally resolve the problem," said Meng. She holds the Zable Endowed Chair in Energy Technologies in the UC San Diego Jacobs School of Engineering.

## Looking to Solid State

The research described in the *Nature Energy* paper could eventually lead to new cathode [materials](#) for solid state batteries. Many researchers, including Meng, consider solid state batteries to be one of the most promising future battery approaches. Lithium-rich NMC cathodes, for example, operate at high voltage and therefore could eventually be paired with solid state electrolytes, which also operate at high voltage. Much of the interest in solid state batteries comes from the fact that solid state electrolytes are believed to be safer than the traditional liquid electrolytes used in Lithium-ion rechargeable batteries.

**More information:** Nucleation of dislocations and their dynamics in layered oxide cathode materials during battery charging, *Nature Energy* (2018). [DOI: 10.1038/s41560-018-0184-2](https://doi.org/10.1038/s41560-018-0184-2) ,

[www.nature.com/articles/s41560-018-0184-2](https://www.nature.com/articles/s41560-018-0184-2)

Provided by University of California - San Diego

Citation: What's causing the voltage fade in lithium-rich NMC cathode materials? (2018, July 16)  
retrieved 26 April 2024 from

<https://techxplore.com/news/2018-07-voltage-lithium-rich-nmc-cathode-materials.html>

<p>This document is subject to copyright. Apart from any fair dealing for the purpose of private study or research, no part may be reproduced without the written permission. The content is provided for information purposes only.</p>
--