


# Engineers develop 3-D-printed metamaterials that change mechanical properties under magnetic fields

December 12 2018, by Ioana Patringenaru

---

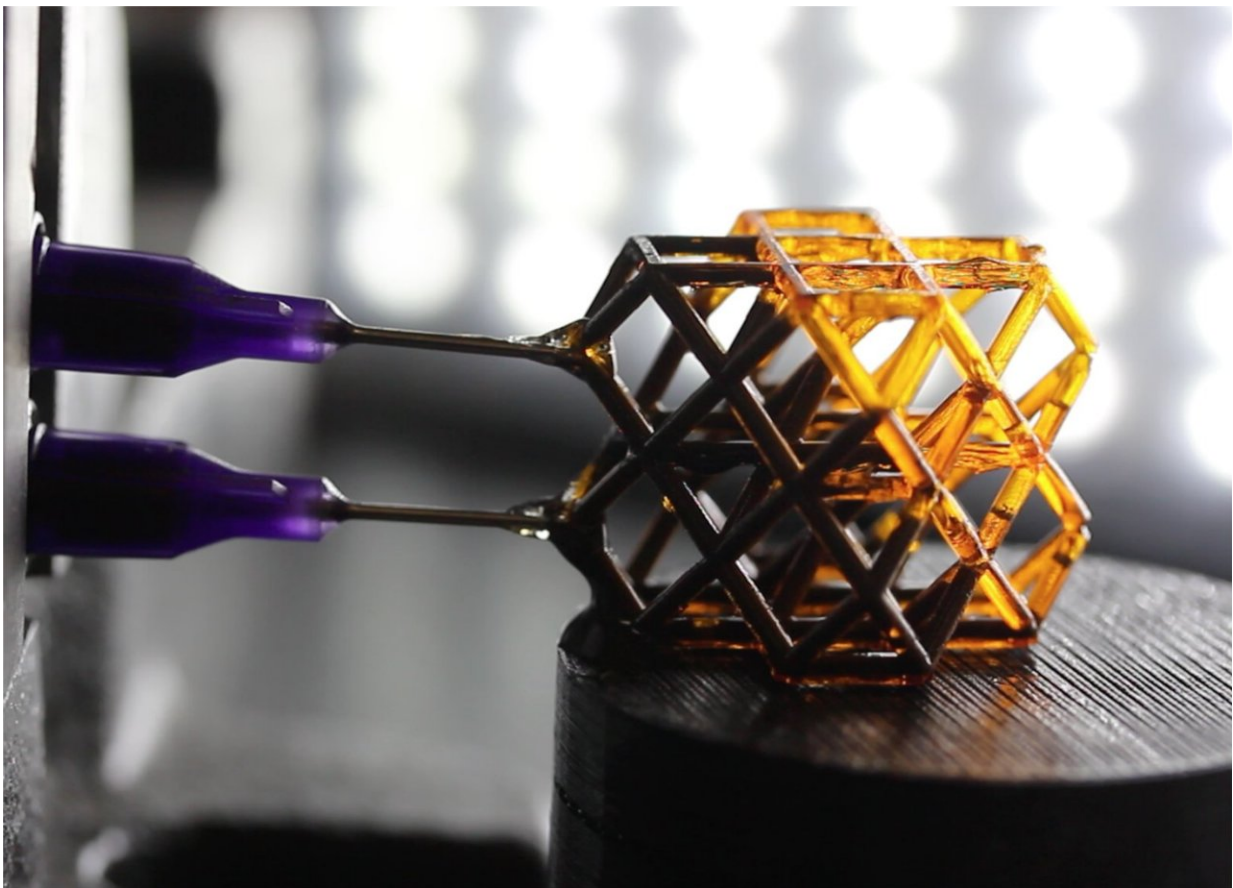

Researchers injected a magnetorheological fluid into hollow lattice structures built on LLNL's Large Area Projection Microstereolithography platform, which 3D prints objects with microscale features over wide areas using light and a photosensitive polymer resin. Credit: Julie Mancini/LLNL


A team of researchers have developed an entirely new class of metamaterials that can nearly instantly respond and stiffen 3-D printed structures when exposed to a magnetic field, a development that could be applied to next-generation helmets, wearable armor and a host of other innovations.

The "field responsive mechanical metamaterials" (FRMMs) employ a viscous, magnetically responsive fluid that is manually injected into the hollow struts and beams of 3-D printed lattices. Unlike other shape morphing or so-called "4-D printed" materials (the fourth dimension being time), the overall [structure](#) of the FRMM's does not change. The fluid's ferromagnetic particles located in the core of the beams form chains in response to the [magnetic field](#) which stiffens the fluid and the [lattice structure](#) as a result. This response happens rapidly, in less than a second. The journal *Science Advances* published the research online today.

"In this paper we really wanted to focus on the new concept of metamaterials with tunable properties, and even though it's a little more of a manual fabrication process, it still highlights what can be done, and that's what I think is really exciting," said lead author Julie (Jackson) Mancini, an engineer at the Lawrence Livermore National Laboratory, who has worked on the project since 2014.

"It's been shown that through structure, metamaterials can create mechanical properties that sometimes don't exist in nature or can be highly designed, but once you build the structure you're stuck with those properties," Mancini said. "A next evolution of these metamaterials is something that can adapt its mechanical properties in response to an external stimulus. Those exist, but they respond by changing shape or color and the time it takes to get a response can be on the order of minutes or hours. With our FRMM's, the overall form doesn't change and the response is very quick, which sets it apart from these other

materials."

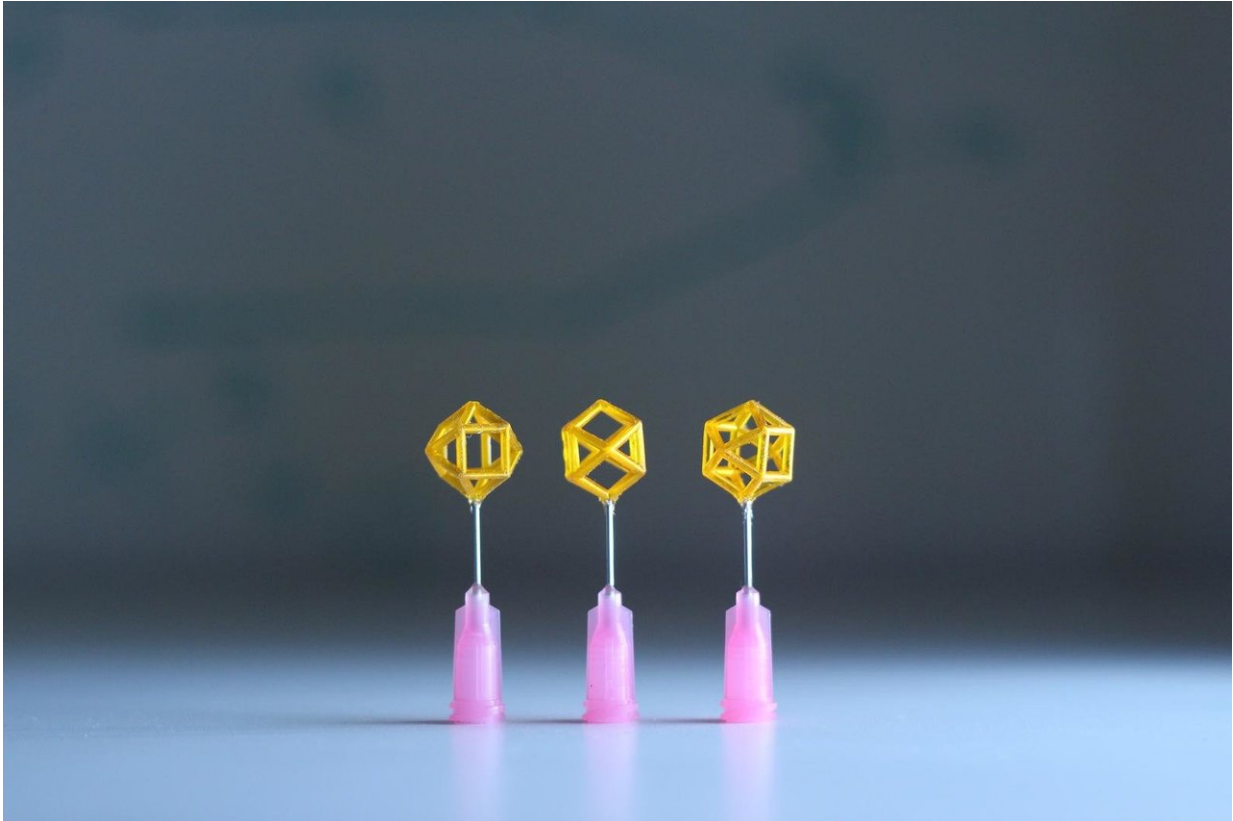

A new class of Lab-developed “field-responsive mechanical metamaterials” (FRMMs) employ a viscous, magnetically responsive fluid that is manually injected into the hollow struts and beams of 3D-printed lattices. The fluid’s ferromagnetic particles located in the core of the beams form chains in response to the magnetic field, which rapidly stiffens the fluid and the lattice structure. Credit: University of California - San Diego

Mancini began the work at the University of California Davis under her master's advisor, materials and engineering professor Ken Loh, who is now at the University of California San Diego. Loh said the concept was partly inspired by automotive-based suspension systems and started out

by looking at ways to develop flexible armor capable of morphing or changing its mechanical properties as needed.

"One of the criteria is to achieve fast response, and magnetic fields and MR materials offer that capability," said Loh, a professor in the Department of Structural Engineering at the Jacobs School of Engineering at UC San Diego.

Loh said researchers will look into new ways to develop a single-phase material, instead of having a liquid embedded in solid, and higher performance-to-weight ratios, adding that future work "could lead to new technologies, such as flexible armor for the warfighter that stiffen instantaneously when a threat is detected."

Researchers injected a magnetorheological (MR) fluid into hollow [lattice](#) structures built on LLNL's Large Area Projection Microstereolithography (LAP $\mu$ SL) platform, which 3-D prints objects with microscale features over wide areas using light and a photosensitive polymer resin. The new form of dynamically tunable metamaterial owes a lot of its success to the LAP $\mu$ SL machine, Mancini said, because the complex tubular lattice structures had to be manufactured with thin walls relative the overall size of the structure, and capable of keeping the fluid contained while withstanding the pressure generated during the infill process and the response to a magnetic field.

Once the magnetically responsive fluid is inside the lattice structures, applying an external magnetic field causes the fluid to stiffen and the overall 3-D printed structures subsequently stiffen almost instantaneously. The change is easily reversible and highly tunable by varying the strength of the applied magnetic field, researchers said.

"What's really important is it's not just an on and off response, by adjusting the magnetic field strength applied we can get a wide range of

mechanical properties," Mancini said. "The idea of on-the-fly, remote tunability opens the door to a lot of applications."

Mancini said the technology could be useful for impact absorption—for example, automotive seats could have fluid-responsive metamaterials integrated inside along with sensors to detect a crash, and seats would stiffen on impact, potentially reducing passenger motion that can cause whiplash. It could also be applied to next-generation helmets or neck braces, housing for optical components and soft robotics, among many other applications.

To predict how arbitrary MR fluid-filled lattice structures would respond to an applied magnetic field, former LLNL researcher Mark Messner (now a staff engineer at Argonne National Laboratory) developed a model from single strut tests.

Starting with a model he developed at LLNL predicting the mechanical properties of non-tunable static lattice-structured materials, Messner added a representation of how MR fluid affects a single lattice member under a magnetic field and incorporated the model of a single strut into a designs for unit cells and lattices. From there, he was able to calibrate the model to experiments Mancini performed on fluid-filled tubes similar to the struts in the lattices. The team used the model to optimize the topology of the lattice, finding the structures that would result in large changes in [mechanical properties](#) as the magnetic field was varied.

"We looked at elastic stiffness, but the model (or similar models) can be used to optimize different lattice structures for different sorts of goals," Messner said. "The design space of possible lattice structures is huge, so the model and the optimization process helped us choose likely structures with favorable properties before (Mancini) printed, filled, and tested the actual specimens, which is a lengthy process."

Mancini said she and her team will continue working toward printing structures with the magnetic [field](#) responsive fluid built-in to eliminate the manual in-filling stage, and on increasing the overall size of the structures.

**More information:** Julie A. Jackson et al. Field responsive mechanical metamaterials, *Science Advances* (2018). [DOI: 10.1126/sciadv.aau6419](https://doi.org/10.1126/sciadv.aau6419)

[Field-responsive mechanical metamaterials \(FRMMs\)](#)

Provided by University of California - San Diego

Citation: Engineers develop 3-D-printed metamaterials that change mechanical properties under magnetic fields (2018, December 12) retrieved 20 April 2024 from <https://techxplore.com/news/2018-12-d-printed-metamaterials-mechanical-properties-magnetic.html>

<p>This document is subject to copyright. Apart from any fair dealing for the purpose of private study or research, no part may be reproduced without the written permission. The content is provided for information purposes only.</p>
------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------