

Adding guanidinium thiocyanate to mixed tin-lead perovskites to improve solar cell efficiency

April 19 2019, by Bob Yirka




Credit: CC0 Public Domain

A team of researchers affiliated with several institutions in the U.S. has found a way to improve the efficiency of perovskite-based solar

cells—by adding guanidinium thiocyanate to the mix. In their paper published in the journal *Science*, the group describes their work with perovskite-based solar cells and how well they worked.

For most of its history, silicon has been the material of choice when making [solar cells](#)—no other material was as efficient or could produce for as long. But in recent years, chemists have been working with [different materials](#) that have come closer. One such promising material is crystalline [perovskite](#). It is generally made from lead, bromine, iodine and other elements. Currently, solar cells made with perovskite have two advantages over traditional silicon cells. They are cheaper to make and they are better at absorbing high-energy blue photons. The second feature has led solar cell makers to marry the two types of cells together to create tandem silicon/perovskite cells providing the best benefits of both. But solar cell makers still believe that eventually, all-perovskite-based cells can replace silicon cells entirely at some point, resulting in bringing down production costs. In this new effort, the researchers claim to have found a way to come close.

Prior research had shown that adding tin to the mix when making perovskites resulted in making them more efficient—almost as efficient as silicon-based cells. But tin degraded when exposed to oxygen. To prevent that from happening, the team in the U.S. also added guanidinium thiocyanate to the mix. It is an organic compound that coats other [materials](#)—in this case, the tin in the perovskite mix. The researchers found that doing so prevented the tin from degrading. Testing the resulting perovskite showed it to be approximately 20 percent efficient. When the team combined it with a traditional perovskite cell designed to absorb high energy photons—making an all-perovskite tandem—they saw efficiencies of 25 percent. This is close to the 28 percent seen with silicon-perovskite tandems.

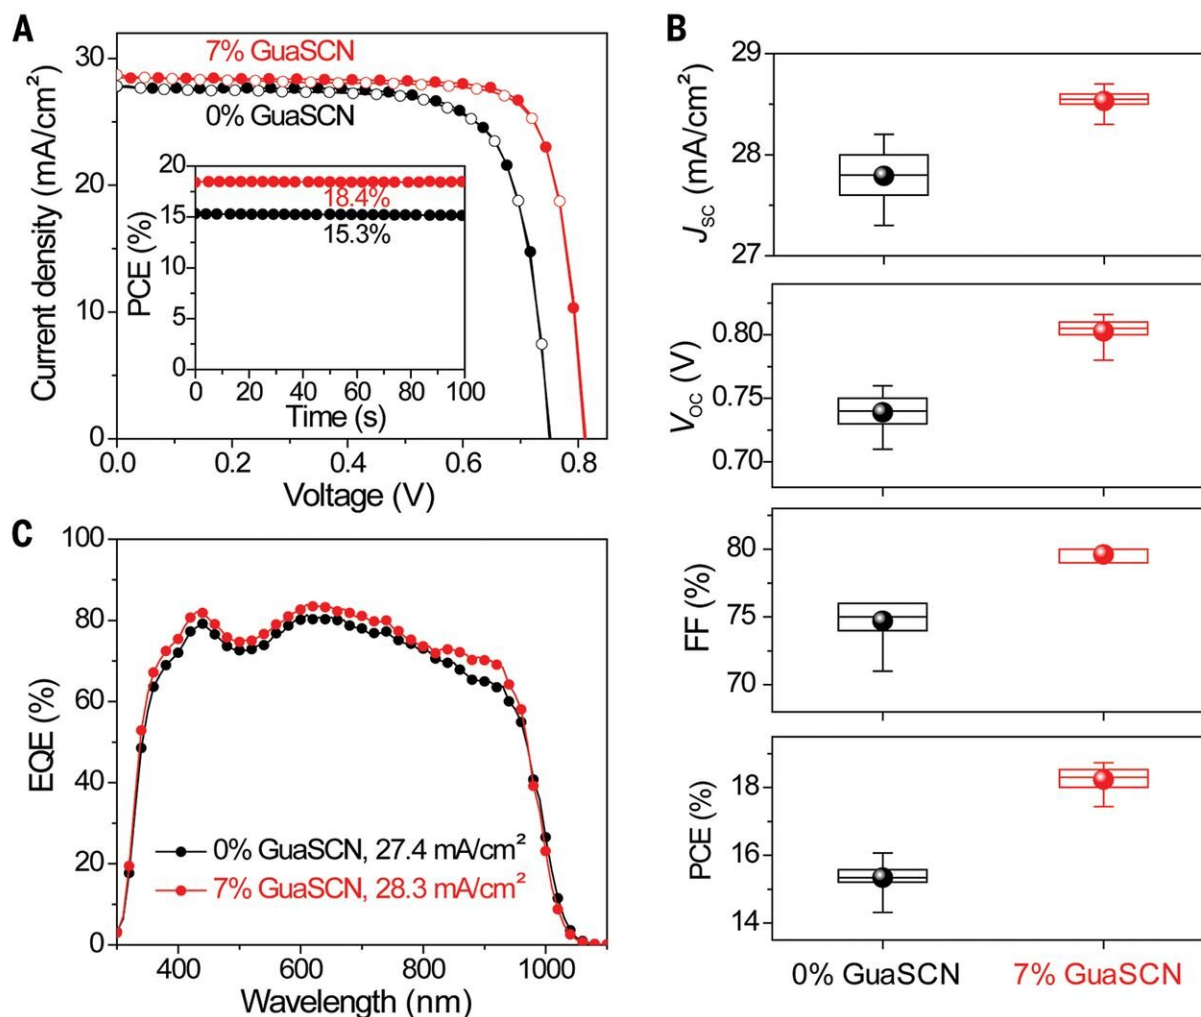

Comparison of device characteristics. (A) Typical photocurrent density–voltage (J-V) curves (inset showing the stable power outputs) and (B) statistical comparison of J-V parameters of low-bandgap PSCs prepared using 7% GuaSCN additive or without using the GuaSCN additive (control, 0% GuaSCN). The mean value, maximum/minimum values, and 25% to 75% region of data are represented by the circle, top/bottom bars, and rectangle, respectively. (C) External quantum efficiency of the two devices shown in (A) with the integrated current density indicated. Credit: *Science* (2019). DOI: 10.1126/science.aav7911

The researchers note that they believe they can increase the efficiency

more, perhaps reaching silicon/perovskite tandem levels, but acknowledge they still have other issues to deal with before such [cells](#) would become viable—most prominently, making them last long enough for commercial use.

More information: Jinhui Tong et al. Carrier lifetimes of $>1\ \mu\text{s}$ in Sn-Pb perovskites enable efficient all-perovskite tandem solar cells, *Science* (2019). [DOI: 10.1126/science.aav7911](https://doi.org/10.1126/science.aav7911)

© 2019 Science X Network

Citation: Adding guanidinium thiocyanate to mixed tin-lead perovskites to improve solar cell efficiency (2019, April 19) retrieved 1 May 2024 from <https://techxplore.com/news/2019-04-adding-guanidinium-thiocyanate-tin-lead-perovskites.html>

<p>This document is subject to copyright. Apart from any fair dealing for the purpose of private study or research, no part may be reproduced without the written permission. The content is provided for information purposes only.</p>
--