


Agile untethered fully soft robots in liquid

August 5 2019

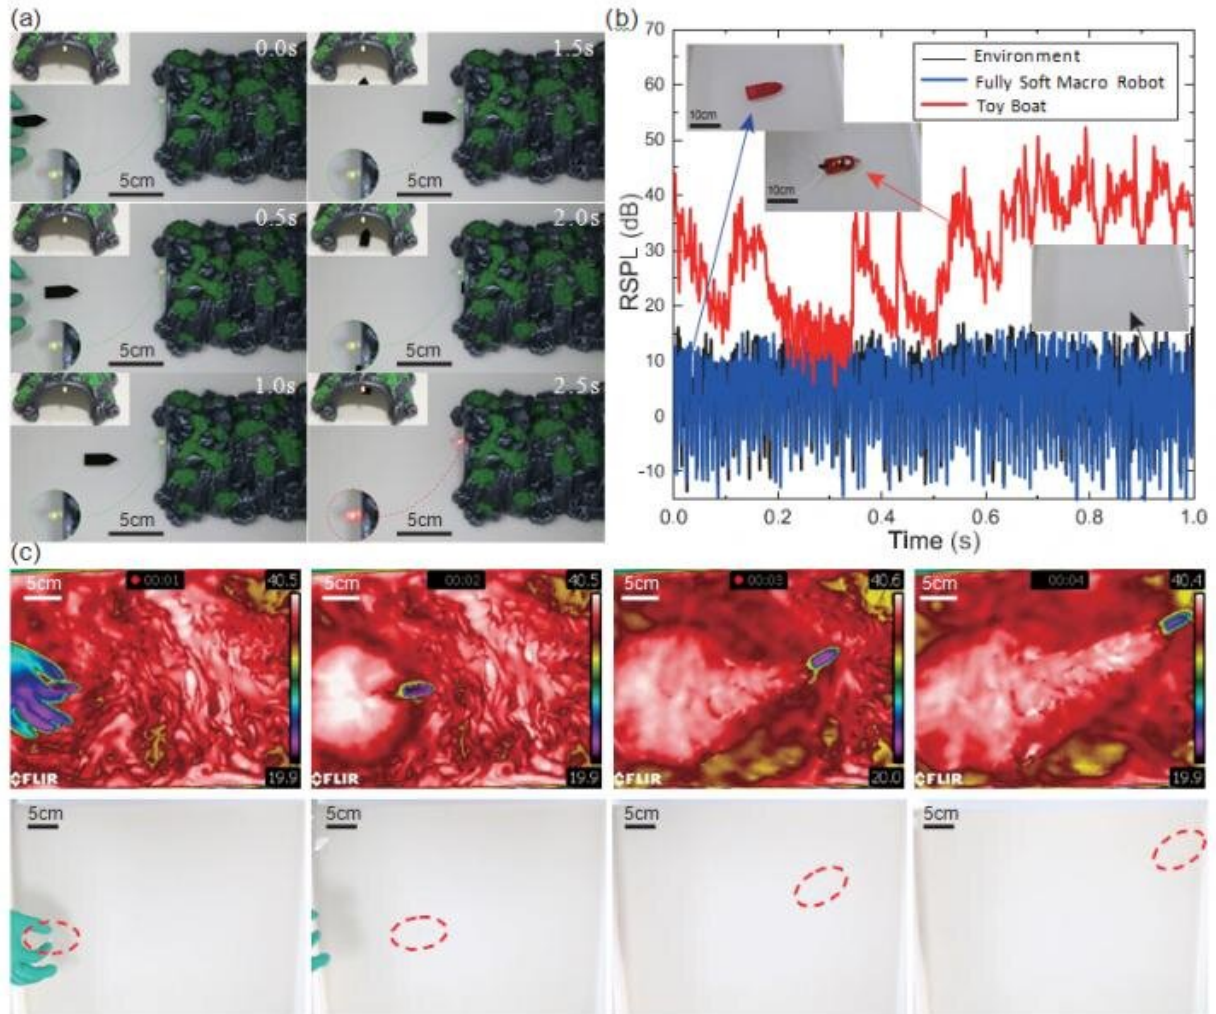

(a) Photographs of a robot targeting an LED-indicated path. The targeting demonstration shows the accuracy that the robot control can achieve. (b) Comparison of the measured relative noise level of a soft macro robot and a battery-powered, similarly sized toy boat. RSPL denotes to the relative sound pressure level. The robot exhibits a much lower noise level compared to the toy

boat. (c) Photographs of a cold robot moving in warm water taken by an infrared video camera and a normal camera, respectively. Credit: ©Science China Press

Soft robots have gained much attention in the past several years for their unique characteristics compared to traditional rigid robots. However, unlike the Baymax in the film "Big Hero 6," state-of-the-art soft robot is just a prototype in labs, usually tethered, which means it requires an electrical wire or pneumatic tubing for powering. To exploit the full potential of soft robots, untethered design is preferred. Existing approaches to equip the soft robots with untethered design usually involve high energy-density powering sources, which leads to integration problems, otherwise the robot will be bulk and clumsy for carry low energy-density power sources.

In nature are enormous creatures who have evolved for billions of years for surviving. Rove beetles in genus *Stenus*, a type of terrestrial insects lives around pools or streams, would gain a burst of kinetic energy to escape when they accidentally fell onto the water, by secreting chemicals to generate a surface energy gradient. Such a propulsive process, commonly known as Marangoni Propulsion, was adopted by live creatures, so it was mild and gentle, completely compatible with soft materials.

In a new research article published in the Beijing-based *National Science Review*, scientists at Huazhong University of Science & Technology report an untethered fully [soft robot](#) in liquid whose actuation employs environmental energy gradients. By releasing environmental active materials (EAMs) to the liquid environment, the robot could gain an agile speed of 5.5 body lengths per second, which is 7 times higher than the best reported value in the untethered soft robotic fish.

"A few advantages occur by adopting such a mechanism, such as quietness, no thermal fatigue and so on." Prof. Zhigang Wu said, "More importantly, the [actuation](#) and the robot functional realization can be complemented separately. The designer, for the first time, gains the opportunity to focus on the function realization. This might enable the soft [robot](#) in some untouched scenarios in the future."

More information: Liang Xiong Lyu et al, Bio-Inspired Untethered fully soft Robots in Liquid Actuated by Induced Energy Gradients, *National Science Review* (2019). [DOI: 10.1093/nsr/nwz083](https://doi.org/10.1093/nsr/nwz083)

Provided by Science China Press

Citation: Agile untethered fully soft robots in liquid (2019, August 5) retrieved 4 May 2024 from <https://techxplore.com/news/2019-08-agile-untethered-fully-soft-robots.html>

<p>This document is subject to copyright. Apart from any fair dealing for the purpose of private study or research, no part may be reproduced without the written permission. The content is provided for information purposes only.</p>
--