


Tiny tweaks for big wins in solar cells

August 26 2019

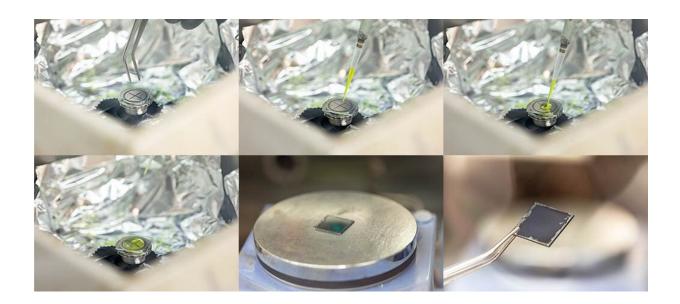

This sequence captures the fabrication process of a perovskite thin film from precursor solution to solid film via the spin-coating deposition process. Credit: KAUST

Solar cell performance and stability depend on the morphology of the thin films, especially their ability to crystallize in the so-called photoactive α -phase. Perovskites containing lead tend to combine various halides, such as the anionic forms of bromine and iodine, with mixtures of methylammonium, formamidinium, cesium and other cations. These have led to record conversion efficiencies and thermal stabilities compared with their single-halide, single-cation analogs. However, these mixed-halide, mixed-cation perovskite films have been



characterized only throughex-situpostdeposition techniques. This limits the understanding of the mechanisms that govern their growth from their sol-gel precursor to their solid state and stalls attempts to improve device performance and stability.

Now, Stefaan De Wolf, his postdoc Kai Wang and coworkers have investigated the impact of cations, halides and antisolvent dripping on mixed-halide, mixed-cation <u>perovskite films</u>. The team tracked the <u>films</u> ' structural evolution during the spin-coating deposition process using anin situX-ray scattering technique. The X-ray technique probed the films at the atomic scale from their sol-gel precursor to the <u>solid state</u> and provided information about the formation of crystalline intermediates during the solidification. The researchers also incorporated the films into <u>solar cells</u> and evaluated the performance and stability of the resulting devices.

"Our study provides critical insights into the crystallization of the multicomponent systems toward high-performance perovskite solar cells," Wang says. Changes in the compositions of the halide and cation dramatically affected the solidification of the perovskite precursors during spin coating and the subsequent formation of the desired α -phase upon antisolvent addition.

The period needed to generate high-quality films by antisolvent addition ended when the sol-gel structure collapsed to produce crystalline byproducts depending on the precursor mixture. Consequently, tuning the halide-cation mixture could delay this collapse, widening the antisolvent dripping window from a few seconds to several minutes. As well, simultaneously incorporating cesium and rubidium cations in the perovskite synergistically stimulated the formation of the α -phase. The length of this window showed little effect on resulting solar cell performance as long as the antisolvent was added within this period.



These findings suggest new directions for the development of perovskite formulations that can further stabilize the sol-gel state and promote its conversion to the desirable perovskite phase. "This is critical in achieving better-performing, reproducible, cost-efficient and scalable manufacturing of perovskite solar cells," Wang says.

The team is working on transferring this knowledge to other deposition technologies to progress toward market-ready <u>perovskite</u> solar <u>cells</u>.

More information: Hoang X. Dang et al. Multi-cation Synergy Suppresses Phase Segregation in Mixed-Halide Perovskites, *Joule* (2019). <u>DOI: 10.1016/j.joule.2019.05.016</u>

Kai Wang et al. Kinetic Stabilization of the Sol-Gel State in Perovskites Enables Facile Processing of High-Efficiency Solar Cells, *Advanced Materials* (2019). DOI: 10.1002/adma.201808357

Provided by King Abdullah University of Science and Technology

Citation: Tiny tweaks for big wins in solar cells (2019, August 26) retrieved 2 May 2024 from <u>https://techxplore.com/news/2019-08-tiny-tweaks-big-solar-cells.html</u>

This document is subject to copyright. Apart from any fair dealing for the purpose of private study or research, no part may be reproduced without the written permission. The content is provided for information purposes only.