


# Additively manufactured titanium alloy parts

October 7 2019

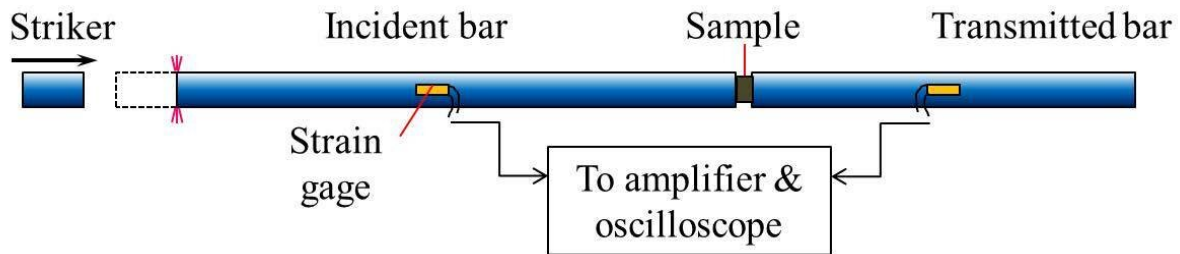

Schematic of the split Hopkinson pressure bar setup. Credit: University of Illinois Dept. of Aerospace Engineering

Aerospace manufacturers, industries, and government agencies like the design freedom and convenience afforded from additive manufacturing—a process similar to 3-D printing. But do these parts have the same properties, especially strength, as those made using the more conventional subtractive method—turned on a lathe from a solid stock? A recent study at the University of Illinois at Urbana-Champaign conducted stress tests to find out.

Additively manufactured cylinders were obtained made from Ti-6AL-4V, a [titanium alloy](#) which is about 90 percent titanium, six percent aluminum, and four percent vanadium—Ti64 for short.

Layers of the titanium alloy in the form of a powder are locally melted by a [high-power laser](#) and built up layer-by-layer into a shape guided by

a Computer-Aided Design algorithm. Each layer bonded in place by the laser beam is just 30 microns thick. By comparison, a human hair is about 100 microns. As layers are added, they keep being melted by the laser and are bonded to the ones below.

In the experiment, the cylinder is sandwiched between two steel bars that are long, strong, and relatively thick. Another bar, called a striker bar, is propelled using compressed air so that it hits the first bar. It transmits a stress pulse that then passes through the bar and into the sample, and the recorded signals graph a stress-strain curve for the Ti64 material, according to John Lambros, professor in the Department of Aerospace Engineering and director of the Advanced Materials Testing and Evaluation Laboratory at U of I.

Because of the additive method, there is a directionality to the microstructure of the cylinders, like a seam between each of the layers, creating a sort of grain structure to the material.

"Our original belief was that the layering would have a huge impact on the strength properties of the material," Lambros said. "The structure is very different from traditionally forged material. The grains are more elongated and are bigger, reaching hundreds of microns. In the forged material, the grains are much smaller and more rounded. But the additive Ti64 didn't break the way we thought it would. That was, for me, the most surprising thing.

"We found that they sometimes broke on the micro-structural seams. These are planes that offer the least resistance. But we learned that the layer interface itself is pretty strong. The additive Ti64 actually breaks more or less how a regular material would break. What this means is that even under these extreme circumstances and loadings, it's quite good. Current metal additive manufacturing techniques produce much better parts than they did as recently as five years ago. Comparatively to earlier

generations of builds, these newer additively manufactured metals are fantastic," Lambros said.

Lambros said the level of stress these materials were subjected to is not a level of compression it would be designed for, not for normal applications. They also tested conventional titanium using stock of regular forged titanium and did the same experiments.

"The level of compressions we used in this experiment were similar to impact events, like those seen in a crash or explosion," he said. "But for many applications, designers would want to have that information to fully understand the limits of the material.

"So far, what we have seen is that additively manufactured parts are good and reliable and consistent. And certainly as good, if not in some cases better, than regular material. The microstructure is very different—the grains for example. They look very different. There's a lot of residual stress because these additively manufactured materials underwent a very violent past to get to this point—a torturous history similar to welding as lasers heat the layers as they are applied. They leave some stresses in there that would affect things. But again, apparently not that much in the end."

Lambros said when parts are being certified for flight, they are examined from the beginning of their life—meaning, starting from how the original material was made, down to the design of the part and how it's used in the aircraft. A lot has to happen before a part obtains FAA approval.

"Although initially there were all sorts of problems with these AM materials," he said, "now it's to the point that the product is actually quite good. It's comparable to what you would get through your typically forged or machined material and in some instances, it's perhaps even

better, bringing additively manufactured parts one step closer to certification."

The study, "Loading Orientation Effects on the Strength Anisotropy of Additively-Manufactured Ti-6Al-4V Alloys under Dynamic Compression" was written by R.F. Waymel, Huck Beng Chew, and John Lambros. It is published in a special issue of *Experimental Mechanics* on [additive manufacturing](#).

**More information:** R. F. Waymel et al. Loading Orientation Effects on the Strength Anisotropy of Additively-Manufactured Ti-6Al-4V Alloys under Dynamic Compression, *Experimental Mechanics* (2019). DOI: [10.1007/s11340-019-00506-2](https://doi.org/10.1007/s11340-019-00506-2)

Provided by University of Illinois at Urbana-Champaign

Citation: Additively manufactured titanium alloy parts (2019, October 7) retrieved 24 April 2024 from <https://techxplore.com/news/2019-10-additively-titanium-alloy.html>

This document is subject to copyright. Apart from any fair dealing for the purpose of private study or research, no part may be reproduced without the written permission. The content is provided for information purposes only.