


New electrolyte stops rapid performance decline of next-generation lithium battery

October 10 2019, by Joseph E. Harmon

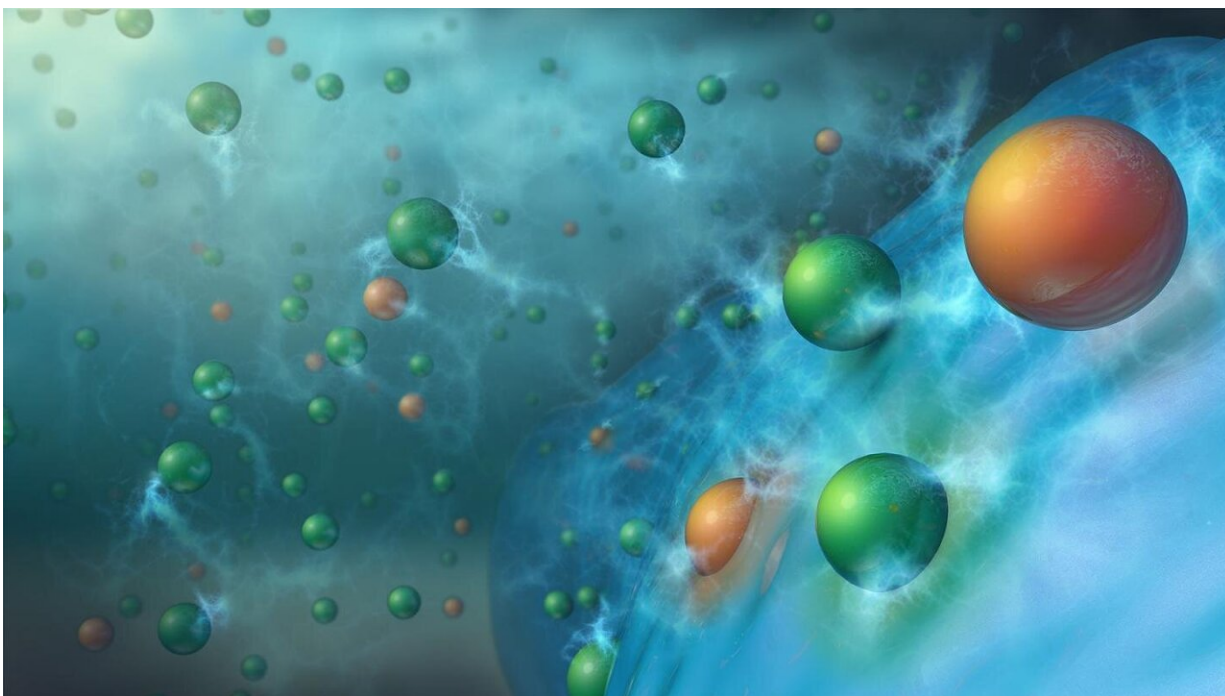

Charging results in doubly or triply charged metal cations, such as Mg^{2+} (orange spheres), along with singly charged lithium ions (green spheres) being co-inserted from the electrolyte into the silicon (blue spheres) anode material. This process stabilizes the anode, enabling long term cycling of lithium-ion batteries. Credit: Argonne National Laboratory

Argonne's new electrolyte mixture stabilizes silicon anodes during cycling.

The [lithium-ion battery](#) is ubiquitous. Because of its versatility, this battery can be tailored to powering cell phones, laptops, power tools or [electric vehicles](#). It is now the source of a multibillion-dollar enterprise annually that continues to grow each year.

Researchers at the U.S. Department of Energy's (DOE) Argonne National Laboratory have developed a new [electrolyte](#) mixture and a simple additive that could have a place in the next generation of lithium-ion batteries.

For many decades, scientists have been vigorously hunting for new electrode materials and electrolytes that can produce a new generation of lithium-ion batteries offering much greater energy storage while lasting longer, costing less and being safer. This new generation will likely make electric vehicles more widespread and accelerate the electric grid's expansion into renewable energy through cheaper and more reliable energy storage.

For scientists developing advanced lithium-ion batteries, the silicon anode has been the preeminent candidate to replace the current graphite anode. Silicon has a significant theoretical energy storage capacity advantage over graphite, being able to store almost ten times the lithium as does graphite. Increasing silicon's attractiveness commercially is its low cost. It is the second most abundant material in the Earth's crust, and its prevalence in computing and telecommunications hardware means there exist substantial processing technologies.

"But a stumbling block has remained," noted Jack Vaughey, a senior chemist in Argonne's Chemical Sciences and Engineering (CSE) division. "On cycling, a silicon-based anode in a lithium-ion cell becomes very reactive with the electrolyte, and this process degrades the cell over time, causing a shortened cycle life."

Lithium-ion battery electrolytes currently contain a solvent mixture, with a dissolved lithium salt and at least one, often more than three organic additives. Argonne scientists have developed a unique electrolyte additive strategy—a small amount of a second salt containing any one of several doubly or triply charged [metal cations](#) (Mg^{2+} , Ca^{2+} , Zn^{2+} , or Al^{3+}). These enhanced electrolyte mixtures, collectively named "MESA" (which stands for mixed-salt electrolytes for silicon anodes), give silicon anodes increased surface and bulk stabilities, improving long-term cycling and calendar life.

"We have thoroughly tested MESA formulations with full [cells](#) fabricated with standard commercially relevant electrodes," said Baris Key, a chemist in the CSE division. "The new chemistry is simple, scalable and fully compatible with existing battery technology."

"In this project, we greatly benefited from Argonne's Cell Analysis, Modeling and Prototyping (CAMP) facility," added Vaughey. "It was there that we tested our MESA formulations."

The Argonne researchers also investigated how the MESA-containing electrolytes work. During charging, the metal cation additions in electrolyte solution migrate into the silicon-based anode along with the lithium ions to form lithium-metal-silicon phases, which are more stable than lithium-silicon. This new cell chemistry greatly reduces the detrimental side reactions between the silicon anode and electrolyte that had plagued cells with the traditional electrolyte. Of the four metal salts tested in cells, the added electrolyte salts with either magnesium (Mg^{2+}) or calcium (Ca^{2+}) cations proved to work the best over hundreds of charge-discharge cycles. The energy densities obtained with these cells surpassed those for comparable cells having graphite chemistry by up to 50%.

"Based on these test results," said Key, "We have every reason to believe

that, if [silicon](#) anodes ever replace graphite or constitute the [anode](#) in more than a few percent concentration, this invention will be part of it and could have far reaching impact."

More information: Binghong Han et al, Using Mixed Salt Electrolytes to Stabilize Silicon Anodes for Lithium-Ion Batteries via in Situ Formation of Li–M–Si Ternaries (M = Mg, Zn, Al, Ca), *ACS Applied Materials & Interfaces* (2019). [DOI: 10.1021/acsami.9b07270](https://doi.org/10.1021/acsami.9b07270)

Provided by Argonne National Laboratory

Citation: New electrolyte stops rapid performance decline of next-generation lithium battery (2019, October 10) retrieved 18 April 2024 from <https://techxplore.com/news/2019-10-electrolyte-rapid-decline-next-generation-lithium.html>

This document is subject to copyright. Apart from any fair dealing for the purpose of private study or research, no part may be reproduced without the written permission. The content is provided for information purposes only.