


World record: Efficiency of perovskite silicon tandem solar cell jumps to 29.15%

January 30 2020

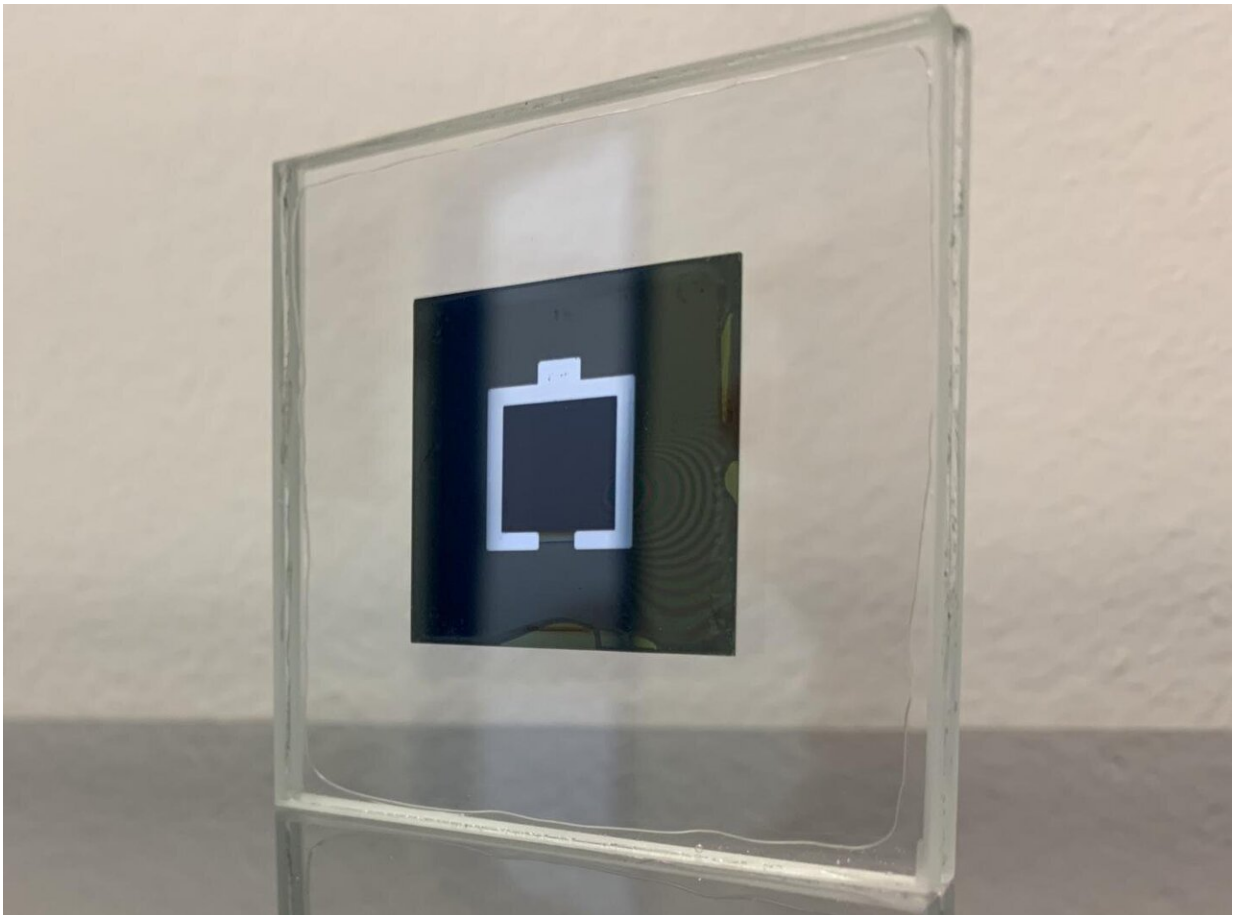

The tandem solar cell was realized on a typical laboratory scale of one square centimeter. However, scaling up is possible. Credit: Eike Köhnen/HZB

While silicon converts mostly the red portions of sunlight into electricity,

perovskite compounds primarily utilise the blue portions of the spectrum. A tandem solar cell made of stacked silicon and perovskite thus achieves significantly higher efficiency than each individual cell on its own.

Prof. Bernd Stannowski from the HZB Institute PVcomB and Prof. Steve Albrecht, who heads a Helmholtz Young Investigator Group (YIG) at HZB, have already jointly set new records for monolithic [tandem solar cells](#) on several occasions. At the end of 2018, the team presented a tandem solar cell made of silicon with a metal-halide perovskite that achieved an efficiency of 25.5 per cent. Then Oxford Photovoltaics Ltd. announced a value of 28 per cent.

Now the HZB team can report the next record. The value of 29.15 per cent has been certified by the Fraunhofer Institute for Solar Energy Systems (ISE) on Friday, Jan. 24th and now appears in the charts of the National Renewable Energy Lab (NREL), USA. The NREL chart has been tracking the rising efficiency levels for nearly all types of solar cell since 1976. Perovskite compounds have only been included since 2013—and the efficiency of this class of material has increased more than in any other material since then.

"We developed a special electrode contact layer for this cell in collaboration with the group of Prof. Vytautas Getautis (Kaunas University of Technology), and also improved intermediate layers," explain Eike Köhnen and Amran Al-Ashouri, doctoral students in Albrecht's group. The new electrode contact layer also permitted improvement of the perovskite compound's composition in the HZB HySPRINT laboratory. This compound is now more stable when illuminated in the tandem solar cell and improves the balance of electrical currents contributed by the top and bottom [cells](#). The silicon bottom cell comes from Stannowski's group and features a special silicon-oxide top layer for optically coupling the top and bottom cells.

All processes used to realise this one-square-centimeter cell are also suitable in principle for large surface areas. Scaling up with the help of vacuum deposition processes is very promising, as initial tests have already shown.

The realistic practical efficiency limit for tandem cells made of [silicon](#) and [perovskite](#) is about 35 per cent. Next, the HZB team wants to break the 30 per cent efficiency barrier. Albrecht explains that initial ideas for this are already under discussion.

Provided by Helmholtz Association of German Research Centres

Citation: World record: Efficiency of perovskite silicon tandem solar cell jumps to 29.15% (2020, January 30) retrieved 20 March 2024 from <https://techxplore.com/news/2020-01-world-efficiency-perovskite-silicon-tandem.html>

<p>This document is subject to copyright. Apart from any fair dealing for the purpose of private study or research, no part may be reproduced without the written permission. The content is provided for information purposes only.</p>
--