


Conduct-A-Bot system uses muscle signals to enable more natural human-robot communication

April 28 2020, by Rachel Gordon

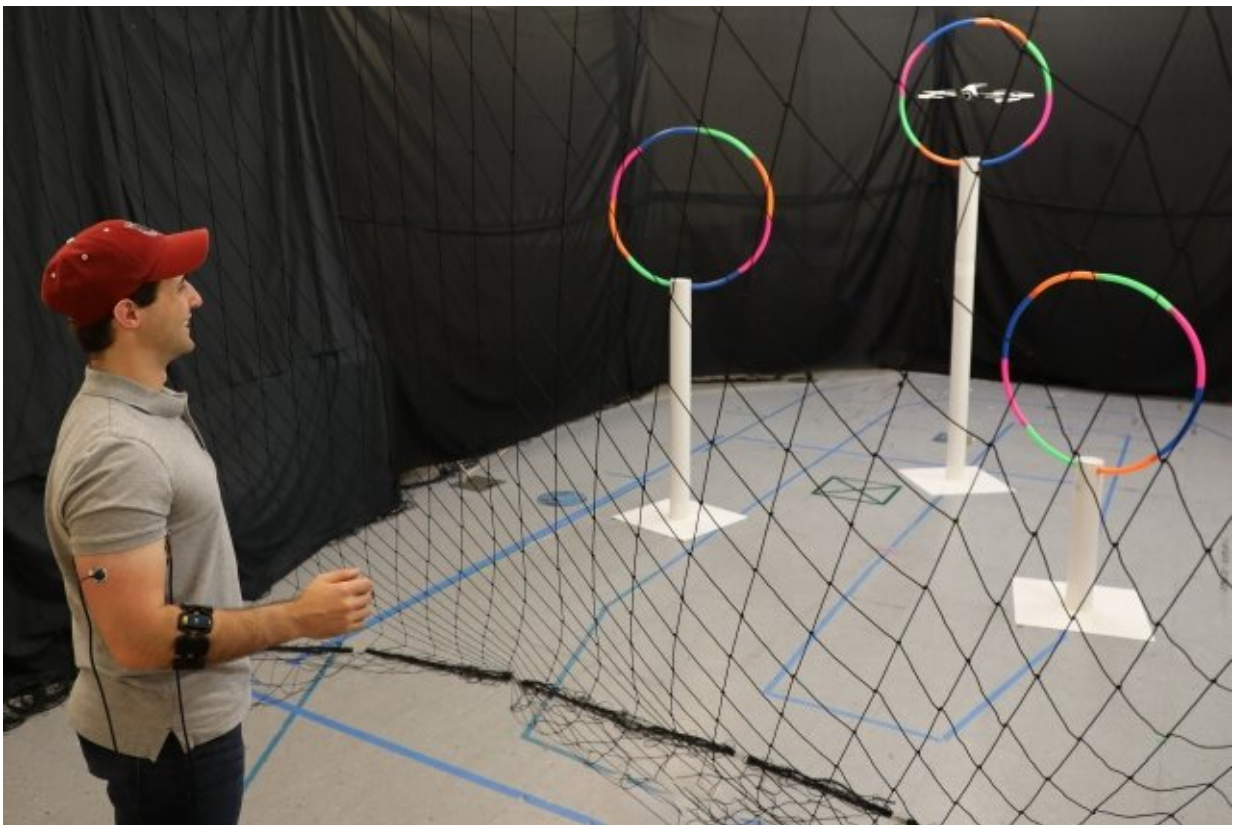

Lead author Joseph DelPreto controls a "Conduct-A-Bot" drone with his arm muscles. Credit: Massachusetts Institute of Technology

Albert Einstein famously postulated that "the only real valuable thing is

intuition," arguably one of the most important keys to understanding intention and communication.


But intuitiveness is hard to teach—especially to a machine. Looking to improve this, a team from MIT's Computer Science and Artificial Intelligence Laboratory (CSAIL) came up with a method that dials us closer to more seamless human-[robot](#) collaboration. The system, called "Conduct-A-Bot," uses human [muscle](#) signals from wearable sensors to pilot a robot's movement.

"We envision a world in which machines help people with cognitive and physical work, and to do so, they adapt to people rather than the other way around," says Professor Daniela Rus, director of CSAIL, deputy dean of research for the MIT Stephen A. Schwarzman College of Computing, and co-author on a paper about the system.

To enable seamless teamwork between people and machines, electromyography and [motion sensors](#) are worn on the biceps, triceps, and forearms to measure muscle signals and movement. Algorithms then process the signals to detect gestures in real time, without any offline calibration or per-user training data. The system uses just two or three wearable sensors, and nothing in the environment—largely reducing the barrier to casual users interacting with robots.

While Conduct-A-Bot could potentially be used for various scenarios, including navigating menus on electronic devices or supervising autonomous robots, for this research the team used a Parrot Bebop 2 drone, although any commercial drone could be used.

By detecting actions like rotational gestures, clenched fists, tensed arms, and activated forearms, Conduct-A-Bot can move the drone left, right, up, down, and forward, as well as allow it to rotate and stop.

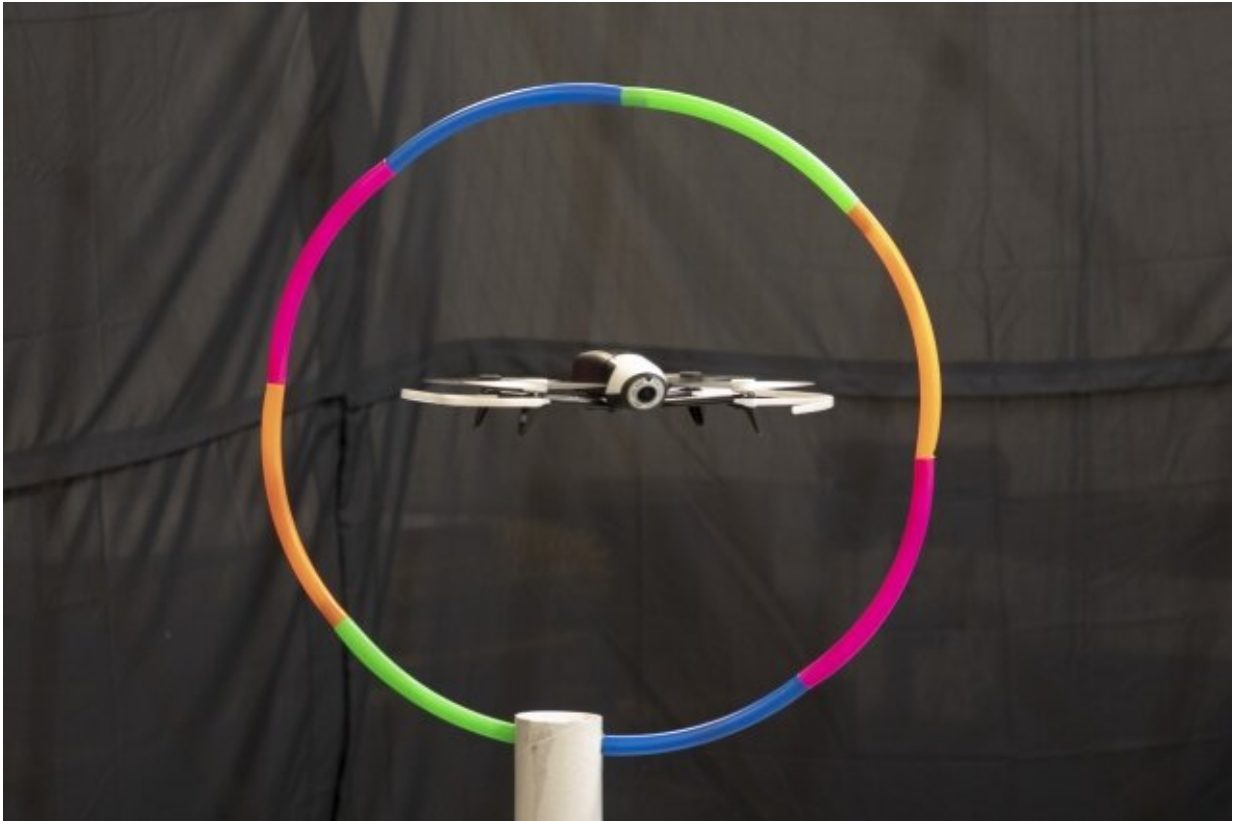

The Conduct-A-Bot system enables users to fly a drone through an obstacle course environment. Credit: Massachusetts Institute of Technology

If you gestured toward the right to your friend, they could likely interpret that they should move in that direction. Similarly, if you waved your hand to the left, for example, the drone would follow suit and make a left turn.

In tests, the drone correctly responded to 82 percent of over 1,500 human gestures when it was remotely controlled to fly through hoops. The system also correctly identified approximately 94 percent of cued gestures when the drone was not being controlled.

"Understanding our gestures could help robots interpret more of the nonverbal cues that we naturally use in everyday life," says Joseph DelPreto, lead author on the new paper. "This type of system could help make interacting with a robot more similar to interacting with another person, and make it easier for someone to start using robots without prior experience or external sensors."

This type of system could eventually target a range of applications for human-robot collaboration, including remote exploration, assistive personal robots, or manufacturing tasks like delivering objects or lifting materials.

These intelligent tools are also consistent with social distancing—and could potentially open up a realm of future contactless work. For example, you can imagine machines being controlled by humans to safely clean a hospital room, or drop off medications, while letting us humans stay a safe distance.

Muscle signals can often provide information about states that are hard to observe from vision, such as joint stiffness or fatigue.

For example, if you watch a video of someone holding a large box, you might have difficulty guessing how much effort or force was needed—and a machine would also have difficulty gauging that from vision alone. Using muscle sensors opens up possibilities to estimate not only motion, but also the force and torque required to execute that physical trajectory.

For the [gesture](#) vocabulary currently used to control the robot, the movements were detected as follows:

- stiffening the upper arm to stop the robot (similar to briefly cringing when seeing something going wrong): biceps and triceps

muscle signals;

- waving the hand left/right and up/down to move the robot sideways or vertically: forearm muscle signals (with the forearm accelerometer indicating hand orientation);
- fist clenching to move the robot forward: forearm muscle signals; and
- rotating clockwise/counterclockwise to turn the robot: forearm gyroscope.

Machine learning classifiers detected the gestures using the wearable sensors. Unsupervised classifiers processed the muscle and motion data and clustered it in real time to learn how to separate gestures from other motions. A [neural network](#) also predicted wrist flexion or extension from forearm muscle signals.

The system essentially calibrates itself to each person's signals while they're making gestures that control the robot, making it faster and easier for casual users to start interacting with robots.

In the future, the team hopes to expand the tests to include more subjects. And while the movements for Conduct-A-Bot cover common gestures for robot motion, the researchers want to extend the vocabulary to include more continuous or user-defined gestures. Eventually, the hope is to have the robots learn from these interactions to better understand the tasks and provide more predictive assistance or increase their autonomy.

"This system moves one step closer to letting us work seamlessly with robots so they can become more effective and intelligent tools for everyday tasks," says DelPreto. "As such collaborations continue to become more accessible and pervasive, the possibilities for synergistic benefit continue to deepen."

More information: Joseph DelPreto et al. Plug-and-Play Gesture Control Using Muscle and Motion Sensors, *Proceedings of the 2020 ACM/IEEE International Conference on Human-Robot Interaction* (2020). DOI: [10.1145/3319502.3374823](https://doi.org/10.1145/3319502.3374823)

This story is republished courtesy of MIT News (web.mit.edu/newsoffice/), a popular site that covers news about MIT research, innovation and teaching.

Provided by Massachusetts Institute of Technology

Citation: Conduct-A-Bot system uses muscle signals to enable more natural human-robot communication (2020, April 28) retrieved 26 April 2024 from <https://techxplore.com/news/2020-04-conduct-a-bot-muscle-enable-natural-human-robot.html>

<p>This document is subject to copyright. Apart from any fair dealing for the purpose of private study or research, no part may be reproduced without the written permission. The content is provided for information purposes only.</p>
--