


# NIST formula may help 5G wireless networks efficiently share communications frequencies

May 26 2020

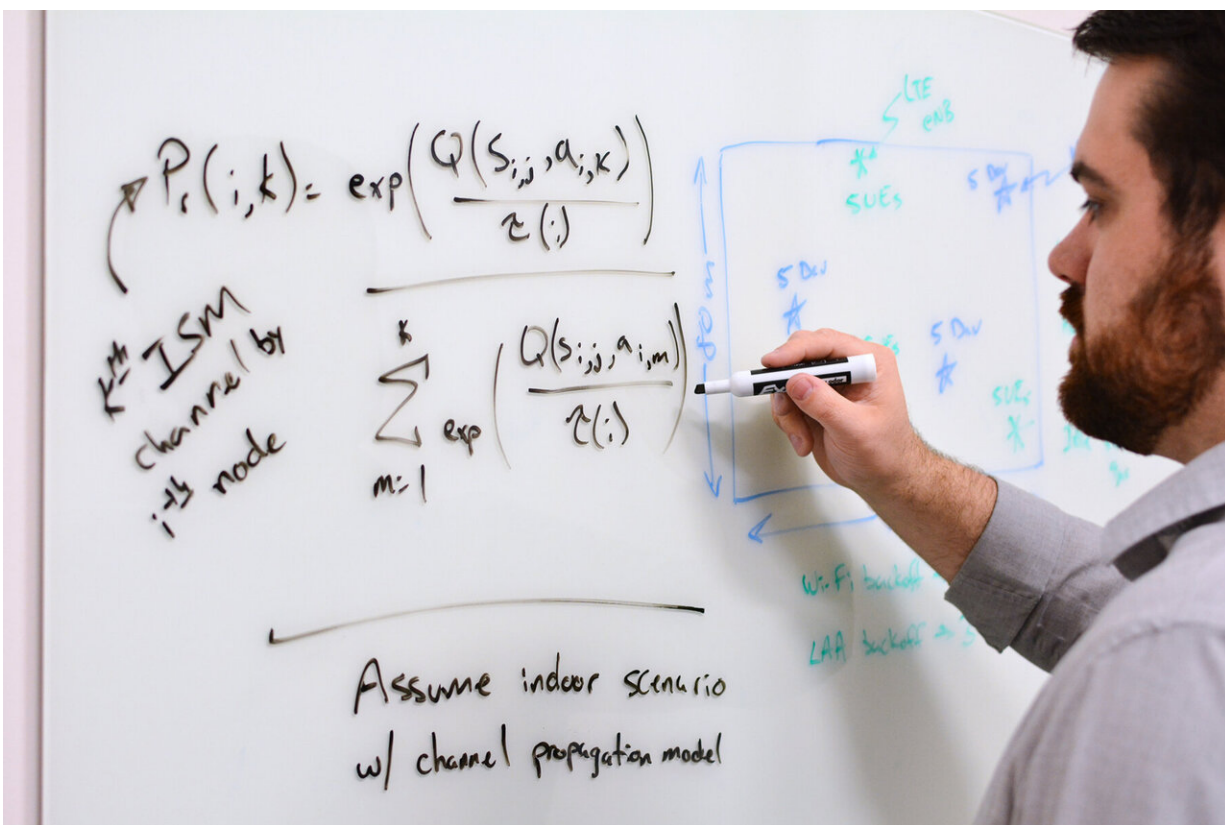

NIST engineer Jason Coder makes mathematical calculations for a machine learning formula that may help 5G and other wireless networks select and share communications frequencies efficiently. Credit: NIST

Researchers at the National Institute of Standards and Technology

(NIST) have developed a mathematical formula that, computer simulations suggest, could help 5G and other wireless networks select and share communications frequencies about 5,000 times more efficiently than trial-and-error methods.

The novel formula is a form of machine learning that selects a wireless frequency range, known as a [channel](#), based on prior experience in a specific network environment. Described at a [conference this week](#), the formula could be programmed into software on transmitters in many types of real-world networks.

The NIST formula is a way to help meet growing demand for wireless systems, including 5G, through the sharing of frequency ranges, also known as bands, that are unlicensed. Wi-Fi, for example, uses unlicensed bands—those not assigned by the Federal Communications Commission to specific users. The NIST study focuses on a scenario in which Wi-Fi competes with cellular systems for specific frequencies, or subchannels. What makes this scenario challenging is that these cellular systems are raising their data-transmission rates by using a method called License Assisted Access (LAA), which combines both unlicensed and licensed bands.

"This work explores the use of machine learning in making decisions about which [frequency channel](#) to transmit on," NIST engineer Jason Coder said. "This could potentially make communications in the unlicensed bands much more efficient."

The NIST formula enables transmitters to rapidly select the best subchannels for successful and simultaneous operation of Wi-Fi and LAA networks in unlicensed bands. The transmitters each learn to maximize the total network data rate without communicating with each other. The scheme rapidly achieves overall performance that is close to the result based on exhaustive trial-and-error channel searches.

The NIST research differs from previous studies of machine learning in communications by taking into account multiple network "layers," the physical equipment and the channel access rules between [base stations](#) and receivers.

The formula is a "Q-learning" technique, meaning it maps [environmental conditions](#)—such as the types of networks and numbers of transmitters and channels present—onto actions that maximize a value, known as Q, that returns the best reward. By interacting with the environment and trying different actions, the algorithm learns which channel provides the best outcome. Each [transmitter](#) learns to select the channel that yields the best data rate under specific environmental conditions.

If both networks select channels appropriately, the efficiency of the combined overall network environment improves. The method boosts data rates in two ways. Specifically, if a transmitter selects a channel that is not occupied, then the probability of a successful transmission rises, leading to a higher data rate. And if a transmitter selects a channel such that interference is minimized, then the signal is stronger, leading to a higher received data rate.

In the [computer simulations](#), the optimum allocation method assigns channels to transmitters by searching all possible combinations to find a way to maximize the total [network](#) data rate. The NIST formula produces results that are close to the optimum one but in a much simpler process. The study found that an exhaustive effort to identify the best solution would require about 45,600 trials, whereas the [formula](#) could select a similar solution by trying only 10 channels, just 0.02 percent of the effort.

The study addressed indoor scenarios, such as a building with multiple Wi-Fi access points and cellphone operations in unlicensed bands. Researchers now plan to model the method in larger-scale outdoor

scenarios and conduct physical experiments to demonstrate the effect.

**More information:** S. Mosleh, Y. Ma, J.D. Rezac and J.B. Coder. Dynamic Spectrum Access with Reinforcement Learning for Unlicensed Access in 5G and Beyond. Presented at [2020 IEEE 91st Vehicular Technology Conference](#), May 25-28, 2020.

Provided by National Institute of Standards and Technology

Citation: NIST formula may help 5G wireless networks efficiently share communications frequencies (2020, May 26) retrieved 20 March 2024 from <https://techxplore.com/news/2020-05-nist-formula-5g-wireless-networks.html>

<p>This document is subject to copyright. Apart from any fair dealing for the purpose of private study or research, no part may be reproduced without the written permission. The content is provided for information purposes only.</p>
--