


Novel 3-D-printed device demonstrates enhanced capture of carbon dioxide emissions

August 24 2020

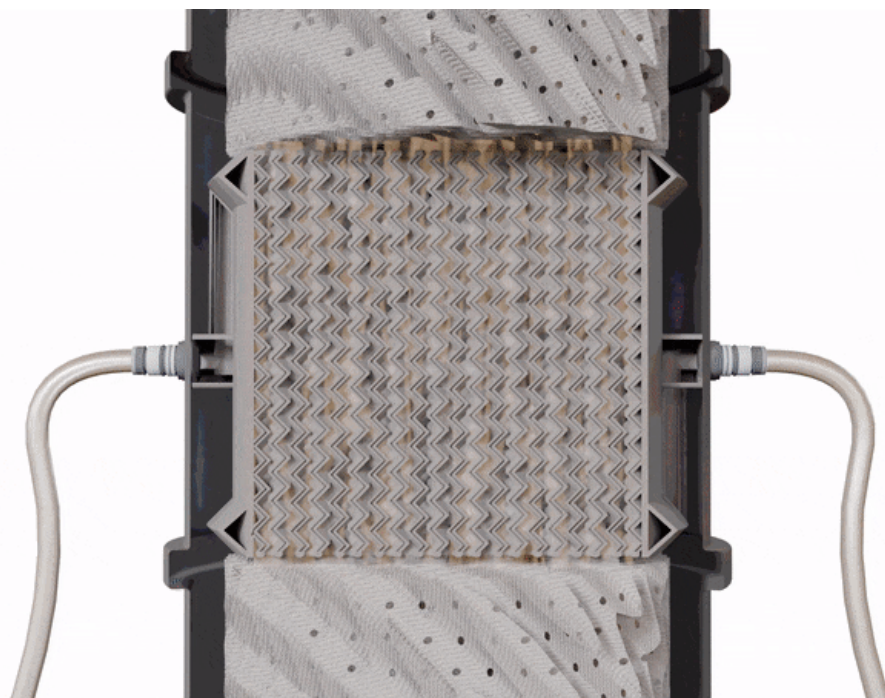

Embedded coolant channels within the intensified device reduce the column temperature due to the heat produced during the forward reaction. Credit: Michelle Lehman/ORNL, U.S. Dept. of Energy

The Department of Energy's Oak Ridge National Laboratory researchers have designed and additively manufactured a first-of-its-kind aluminum

device that enhances the capture of carbon dioxide emitted from fossil fuel plants and other industrial processes.

Solutions for reducing global emissions of heat-trapping greenhouse gases such as CO₂ address the continued use of low-cost, domestic fossil fuel resources while mitigating potential climate impacts.

ORNL's [device](#) focuses on a key challenge in conventional absorption of [carbon](#) using solvents: the process typically produces heat that can limit its overall efficiency. By using [additive manufacturing](#), researchers were able to custom design a multifunctional device that greatly improves the process efficiency by removing excess heat while keeping costs low.

Absorption, one of the most commonly used and economical methods for capturing CO₂, places a flue-gas stream from smokestacks in contact with a solvent, such as monoethanolamine, known as MEA, or other amine solutions, that can react with the gas.

The team tested the novel circular device, which integrates a [heat exchanger](#) with a mass-exchanging contactor, inside a 1-meter-tall by 8-inch-wide absorption column consisting of seven commercial stainless-steel packing elements. The 3-D-printed intensified device was installed in the top half of the column between the packing elements.



In 2019, Oak Ridge National Laboratory researchers Costas Tsouris and Eduardo Miramontes operated the intensified device inside of the absorption column,

which contains commercial stainless-steel packing elements. Credit: Carlos Jones/Oak Ridge National Laboratory, U.S. Dept. of Energy

Additive manufacturing made it possible to have a heat exchanger within the column, as part of the packing elements, without disturbing the geometry, thus maximizing the contact surface area between the gas and liquid streams.

"We call the device intensified because it enables enhanced mass transfer (the amount of CO₂ transferred from a gas to a liquid state) through in-situ cooling," said Costas Tsouris, one of ORNL's lead researchers on the project. "Controlling the temperature of absorption is critical to capturing carbon dioxide."

When CO₂ interacts with the solvent, it produces heat that can diminish the capability of the solvent to react with CO₂. Reducing this localized temperature spike in the column through cooling channels helps increase the efficiency of CO₂ capture.

"Prior to the design of our 3-D printed device, it was difficult to implement a heat exchanger concept into the CO₂ absorption column because of the complex geometry of the column's packing elements. With 3-D printing, the mass exchanger and heat exchanger can co-exist within a single multifunctional, intensified device," said ORNL's Xin Sun, the project's principal investigator.

Embedded coolant channels were added inside the packing element's corrugated sheets to allow for [heat](#) exchange capabilities. The final prototype measured 20.3 centimeters in diameter, 14.6 centimeters in height, with a total fluid volume capacity of 0.6 liters. Aluminum was chosen as the initial material for the intensified device because of its

excellent printability, high thermal conductivity, and structural strength.



The novel 3D-printed intensified device is made of aluminum and integrates a heat exchanger and mass-exchanging contactor into a single device to enhance carbon dioxide capture. Credit: Carlos Jones/ORNL, U.S. Dept. of Energy

"The device can also be manufactured using other materials, such as emerging high thermal conductivity polymers and metals. Additive manufacturing methods like 3-D printing are often cost-effective over time because it takes less effort and energy to print a part versus

traditional manufacturing methods," said Lonnie Love, a lead manufacturing researcher at ORNL, who designed the intensified device.

The prototype demonstrated that it was capable of substantially enhancing carbon dioxide capture with the amine solution, which was chosen because its highly reactive to CO₂.

In results published in the *AIChE Journal*, ORNL researchers conducted two separate experiments—one that varied the CO₂-containing gas flow rate and one that varied the MEA solvent flow rate. The experiments aimed to determine which operating conditions would produce the greatest benefit to carbon capture efficiency.

Both experiments produced substantial improvements in the carbon capture rate and demonstrated that the magnitude of the capture consistently depended on the gas flow rates. The study also showed a peak in capture at 20% of carbon dioxide concentration, with percent of increase in capture rate ranging from 2.2% to 15.5% depending on the operating conditions.

"The success of this 3-D printed intensified device represents an unprecedented opportunity in further enhancing [carbon dioxide](#) absorption efficiency and demonstrates proof of concept," Sun said.

Future research will focus on optimizing operating conditions and device geometry to produce additional improvements in the carbon capture absorption process.

More information: Eduardo Miramontes et al, Process intensification of CO₂ absorption using a 3D printed intensified packing device, *AIChE Journal* (2020). [DOI: 10.1002/aic.16285](https://doi.org/10.1002/aic.16285)

Provided by Oak Ridge National Laboratory

Citation: Novel 3-D-printed device demonstrates enhanced capture of carbon dioxide emissions (2020, August 24) retrieved 16 April 2024 from <https://techxplore.com/news/2020-08-d-printed-device-capture-carbon-dioxide.html>

This document is subject to copyright. Apart from any fair dealing for the purpose of private study or research, no part may be reproduced without the written permission. The content is provided for information purposes only.