

Tandem devices feel the heat

September 14 2020



Testing newly developed solar cells in the real world is vital for optimizing their performance. Credit: © 2020 KAUST


Understanding how solar cell operation changes as it moves from the lab into the real world is essential for optimizing their design prior to mass production. KAUST researchers show how perovskite/silicon tandem solar cells function in a hot, sunny environment.

Silicon dominates commercial solar-cell production. It is abundant and efficient as a converter of light to electricity. But recently, perovskites have emerged as a material with potential for lower cost fabrication

using solution-based processes. Their properties can be tuned via changes in [chemical composition](#).

The optical and electronic properties of a material are linked to its [bandgap](#): the minimum energy incoming photons require to be absorbed. The bandgap also determines how much current is generated when the photon is absorbed. In a conventional solar cell, the light absorbing material absorbs only certain wavelengths of light, those with energies above the bandgap, leaving part of the sun's energy untapped.

To get the benefits of both the industrial maturity of silicon and the versatility of perovskite, scientists have investigated using both materials in a device known as a tandem solar cell. These have a theoretical efficiency limit of 44 percent, which is beyond the 33% limit of conventional solar cells.

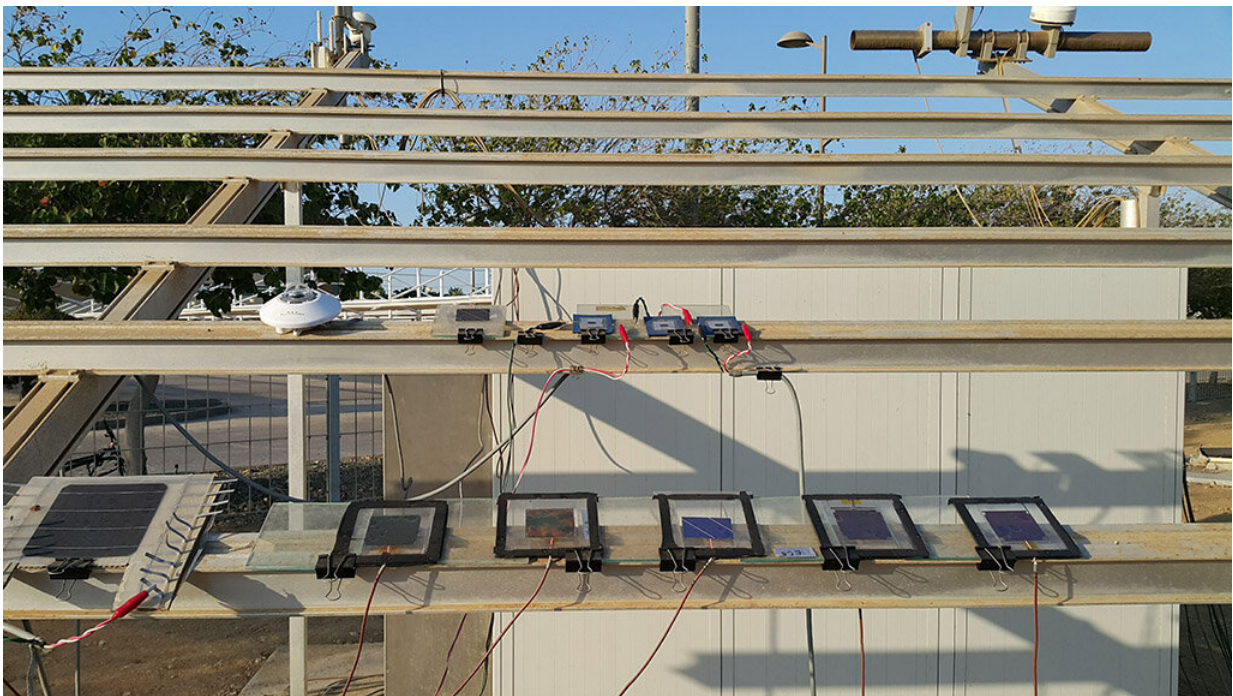

Encapsulated perovskite/silicon tandem solar cells under testing at a KAUST

outdoor test facility. Credit: KAUST 2020

"One limitation of this tandem configuration is that it was thought that the perovskite bandgap had to be wider than stable material compositions would allow," says the first author of the study, Erkan Aydin.

New solar cells are tested in the laboratory under standard test conditions. But the [ambient temperatures](#) in most areas where solar cells are deployed are much higher than the standard 25 degrees Celsius, and can fluctuate dramatically, which affects performance.

Aydin and his colleagues investigated the performance of perovskite/silicon tandem solar cells outdoors in a hot, sunny climate. The KAUST team show that while the silicon bandgap gets smaller as the device gets hotter, the perovskite bandgap gets larger. This shifts the devices away from their ideal operating point and reduces the efficiency of tandem cells optimized at standard test conditions. Encouragingly, this tendency has the effect of lowering the perovskite bandgap, allowing more stable perovskite compositions to be used in tandem solar [cells](#).

"Our research will next focus on pushing the power conversion efficiency of these devices beyond the highest reported single-junction silicon solar cell efficiency of 26.7% with improved stability," says Aydin. "These improvements will bring the [perovskite/silicon tandem solar cells](#) one step closer to the market."

More information: Interplay between temperature and bandgap energies on the outdoor performance of perovskite/silicon tandem solar cells, *Nature* (2020). [DOI: 10.1038/s41560-020-00687-4](https://doi.org/10.1038/s41560-020-00687-4), www.nature.com/articles/s41560-020-00687-4

Provided by King Abdullah University of Science and Technology

Citation: Tandem devices feel the heat (2020, September 14) retrieved 19 April 2024 from <https://techxplore.com/news/2020-09-tandem-devices.html>

This document is subject to copyright. Apart from any fair dealing for the purpose of private study or research, no part may be reproduced without the written permission. The content is provided for information purposes only.