


# Battery of tests: Scientists figure out how to track what happens inside batteries

December 4 2020, by Andre Salles

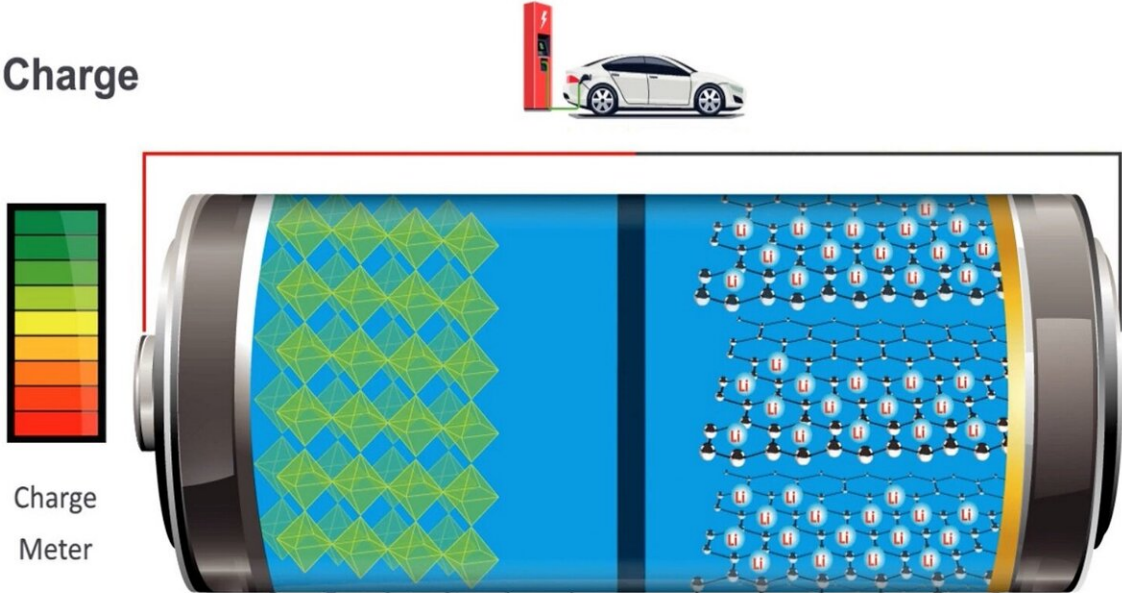

This DOE-created illustration shows ions in a fully charged lithium-ion battery. A team of researchers using the APS has discovered a new method to precisely measure the movement of these ions through a battery. Credit: Department of Energy

The future of mobility is electric cars, trucks and airplanes. But there is no way a single battery design can power that future. Even your cell phone and laptop batteries have different requirements and different

designs. The batteries we will need over the next few decades will have to be tailored to their specific uses.

And that means understanding exactly what happens, as precisely as possible, inside each type of battery. Every battery works on the same principle: ions, which are atoms or molecules with an electrical charge, carry a current from the anode to the cathode through material called the electrolyte, and then back again. But their precise movement through that material, whether liquid or solid, has puzzled scientists for decades. Knowing exactly how different types of ions move through different types of electrolytes will help researchers figure out how to affect that movement, to create batteries that charge and discharge in ways most befitting their specific uses.

In a breakthrough discovery, a team of scientists has demonstrated a combination of techniques that allows for the precise measurement of ions moving through a battery. Using the Advanced Photon Source (APS), a U.S. Department of Energy (DOE) Office of Science User Facility at DOE's Argonne National Laboratory, these researchers have not only peered inside a battery as it operates, measuring the reactions in real time, but have opened the door to similar experiments with different types of batteries.

The researchers collaborated on this result with the Joint Center for Energy Storage Research (JCESR), a DOE Energy Innovation Hub led by Argonne. The team's paper, which details velocities of lithium ions moving through a polymer electrolyte, was published in [Energy and Environmental Science](#).

"This is a combination of different experimental methods to measure velocity and concentration, and then compare them both to theory," said Hans-Georg Steinrück, professor at Paderborn University in Germany and the first author on the paper. "We showed this is possible, and now

we will perform it on other systems that are different in nature."

Those methods, performed at beamline 8-ID-I at the APS, included using ultra-bright X-rays to measure the velocity of the ions moving through the battery, and to simultaneously measure the concentration of ions within the electrolyte, while a model battery discharged. The research team then compared their results with mathematical models. Their result is an extremely accurate figure representing the current carried by ions—what is called the transport number.

The transport number is essentially the amount of current carried by positively charged ions in relation to the overall electric current, and the team's calculations put that number at approximately 0.2. This conclusion differs from those derived by other methods, researchers said, due to the sensitivity of this new way of measuring ion movement.

The true value transport number has been the subject of some debate among scientists for years, according to Michael Toney, professor at the University of Colorado Boulder and an author on the paper. Toney and Steinrück were both staff scientists at the DOE's SLAC National Accelerator Laboratory when this research was conducted.

"The traditional way of measuring the transport number is to analyze the current," Toney said. "But it was unknown how much of that current is due to lithium ions and how much is due to other things you don't want in your analysis. The principle is easy, but we had to measure accurately. This was certainly a proof of concept."

For this experiment the research team used a solid polymer electrolyte, instead of the liquid ones in wide use for lithium ion batteries. As Toney notes, polymers are safer, since they avoid the flammability issues of some liquid electrolytes.

Argonne's Venkat Srinivasan, deputy director of JCESR and an author on the paper, has extensive experience modeling the reactions inside batteries, but this is the first time he's been able to compare those models to real-time data on the movement of ions through an electrolyte.

"For years we wrote papers about what happens inside a battery, since we couldn't see the things inside," he said. "I always joked that whatever I said must be true, since we couldn't confirm it. So for decades we have been looking for information like this, and it challenges people like me who have been making the predictions."

In the past, Srinivasan said, the best way to research the inner workings of batteries was to send a current through them and then analyze what happened afterward. The ability to trace the ions moving in real time, he said, offers scientists a chance to change that movement to suit their battery design needs.

"We had to connect the dots before, and now we can directly detect the ions," he said. "There is no ambiguity."

Eric Dufresne, physicist with Argonne's X-ray Science Division, was one of the APS scientists who worked on this project. An author on the paper, Dufresne said the experiment made use of the coherence available at the APS, allowing the research team to capture the effect they were looking for down to velocities of only nanometers per second.

"This is a very thorough and complex study," he said. "It's a nice example of combining X-ray techniques in a novel way, and a good step toward developing future applications."

Dufresne and his colleagues also noted that these experiments will only improve once the APS undergoes an in-progress upgrade of its electron storage ring, which will increase the brightness of the X-rays it produces

by up to 500 times.

"The APS Upgrade will allow us to push these dynamic studies to better than microseconds," Dufresne said. "We will be able to focus the beam for smaller measurements and get through thicker materials. The upgrade will give us unique capabilities, and we will be able to do more experiments of this type."

That's a prospect that excites the research team. Steinrück said the next step is to analyze more complex polymers and other materials, and eventually into liquid electrolytes. Toney said he would like to examine ions from other types of material, like calcium and zinc.

Examining a diversity of materials, Srinivasan said, would be important for the eventual goal: batteries that are precisely designed for their individual uses.

"If we want to create high-energy, fast, safe, long-lasting batteries, we need to know more about ion motion," he said. "We need to understand more about what happens inside a battery, and use that knowledge to design new materials from the bottom up."

**More information:** Hans-Georg Steinrück et al. Concentration and velocity profiles in a polymeric lithium-ion battery electrolyte, *Energy & Environmental Science* (2020). [DOI: 10.1039/D0EE02193H](https://doi.org/10.1039/D0EE02193H)

Provided by Argonne National Laboratory

Citation: Battery of tests: Scientists figure out how to track what happens inside batteries (2020, December 4) retrieved 25 May 2024 from <https://techxplore.com/news/2020-12-battery-scientists-figure-track-batteries.html>

This document is subject to copyright. Apart from any fair dealing for the purpose of private study or research, no part may be reproduced without the written permission. The content is provided for information purposes only.