


# A fluid solution to dendrite growth in lithium metal batteries

March 2 2021, by Noah Pflueger-Peters

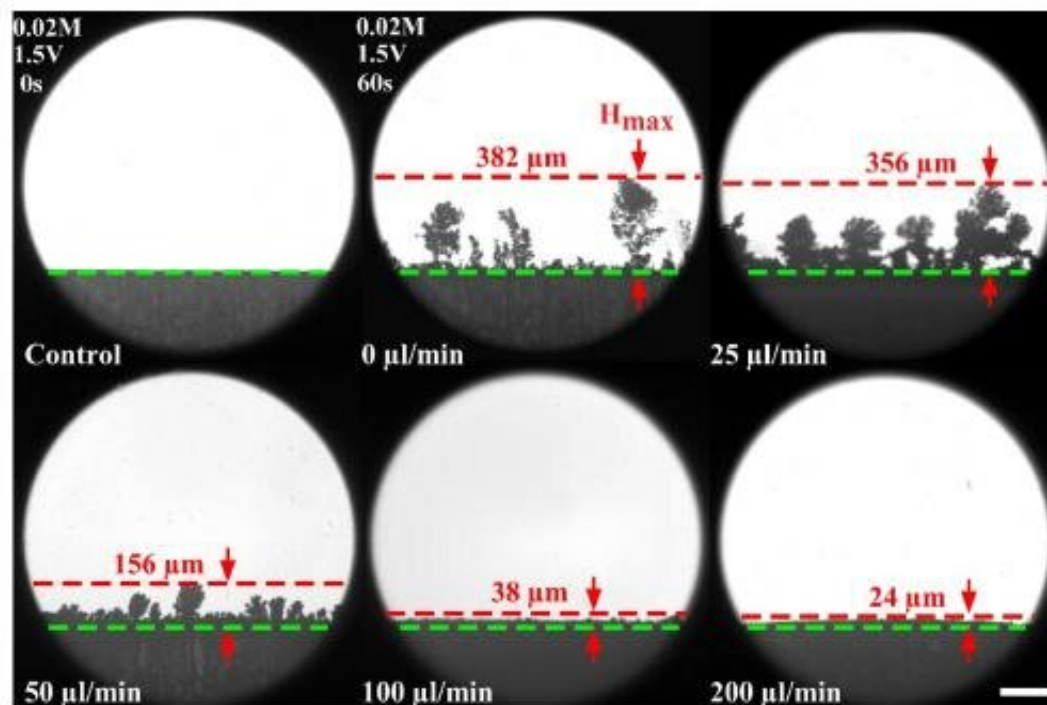

Increasing the flow rate over the electrode reduced the growth of dendrites on the surface. Credit: Jiandi Wan

A new paper from associate professor Jiandi Wan's group in the UC Davis Department of Chemical Engineering, published in *Science Advances*, proposes a potential solution to dendrite growth in rechargeable lithium metal batteries. In the paper, Wan's team prove that flowing ions near the cathode can potentially expand the safety and

lifespans of these next-generation rechargeable batteries.

Lithium metal batteries use [lithium](#) metal as the anode. These batteries have a high charge density and potentially double the energy of conventional lithium ion batteries, but safety is a big concern. When they charge, some ions are reduced to lithium metal at the [cathode](#) surface and form irregular, tree-like microstructures known as dendrites, which can eventually cause a short circuit or even an explosion.

The theory is that [dendrite](#) growth is caused by the competition of mass transfer and reduction rate of lithium ions near the cathode surface. When the reduction rate of ions is much faster than the [mass transfer](#), it creates an electroneutral gap called the space-charged layer near the cathode that contains no ions. The instability of this layer is thought to cause dendrite growth, so reducing or eliminating it might reduce dendrite growth and therefore extend the life of a battery.

## **Dendrite growth reduced 99 percent**

Wan's idea was to flow ions through the cathode in a microfluidic channel to restore a charge and offset this gap. In the paper, the team outlined their proof-of concept tests, finding that this flow of ions could reduce dendrite growth by up to 99 percent.

For Wan, the study is exciting because it shows the effectiveness of applying microfluidics to battery-related problems and paves the way for future research in this area.

"With this fundamental study and microfluidic approaches, we were able to quantitatively understand the effect of flow on [dendrite growth](#)," he said. "Not many groups have studied this yet."

Though it is likely not possible to directly incorporate microfluidics in

real batteries, Wan's group is looking at alternative ways to apply the [fundamental principles](#) from this study and introduce local flows near the cathode surface to compensate cations and eliminate the space charge layer.

"We are quite excited to explore the new applications of our study," he said. "We are already working on design of the cathode surface to introduce convective flows."

**More information:** Meghann C. Ma et al, Suppression of dendrite growth by cross-flow in microfluidics, *Science Advances* (2021). [DOI: 10.1126/sciadv.abf6941](https://doi.org/10.1126/sciadv.abf6941)

Provided by UC Davis

Citation: A fluid solution to dendrite growth in lithium metal batteries (2021, March 2) retrieved 9 April 2024 from <https://techxplore.com/news/2021-03-fluid-solution-dendrite-growth-lithium.html>

<p>This document is subject to copyright. Apart from any fair dealing for the purpose of private study or research, no part may be reproduced without the written permission. The content is provided for information purposes only.</p>
--