


New model, controller to optimize fast charging of electric vehicles

March 17 2021

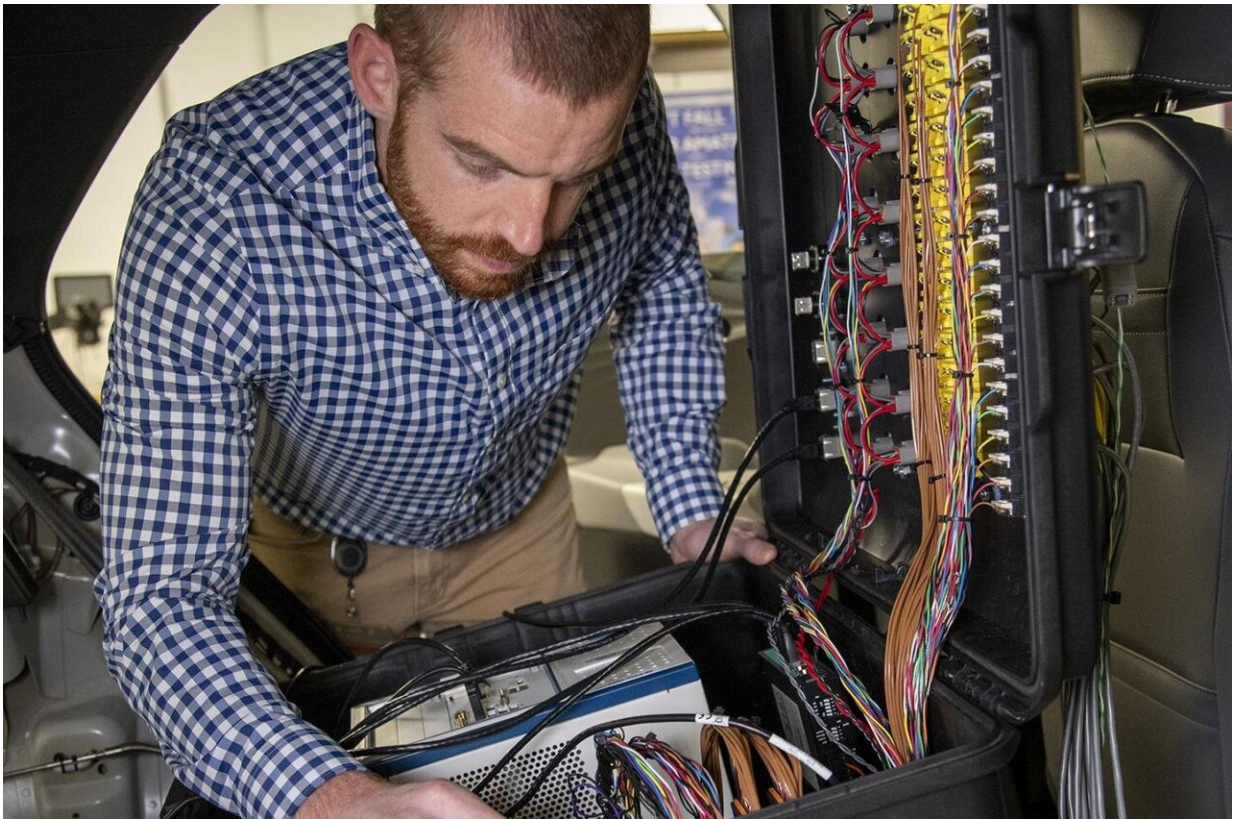

Southwest Research Institute engineers use hardware in the loop controllers, mobile data acquisition systems and other instrumentation to collect battery performance information from lithium ion batteries and electric vehicles. These and other data were used as part of an internal research program to develop a real-time model and controller that monitors and mitigates "lithium plating." With this process, the controller can safely manage fast charging while enabling EVs to get back out on the road in less time. Credit: SwRI

Engineers at Southwest Research Institute are using internal research funds to tackle challenges with fast charging to reduce the time needed to recharge electric vehicles (EVs).

As [electric vehicles](#) gain popularity, consumers expect the switch to [battery](#)-reliant platforms to be seamless, with the same acceleration, performance and comfort of vehicles powered by fossil fuels. For the most part, manufacturers have delivered, but technology still lags in some areas, such as [battery recharge](#). While consumers need only a few minutes to fill a tank with fuel before they can get back on the road, an electric vehicle (EV) typically needs hours to do the same.

Fast charging converts the AC power found in homes to the DC power required by batteries within the charging station itself to significantly speed up charging. However, that speed introduces new challenges.

Fast recharging maximizes the transfer of lithium ions within a battery pack. At these [high rates](#), ions can accumulate on the surface of the battery's anode and deposit metallic lithium by a process called "lithium plating," which can reduce battery performance and, if left unchecked, cause it to short circuit and fail.

"The electrochemistry that causes lithium plating is complex and not completely understood," said Dr. Bapiraju Surampudi, a staff engineer in SwRI's Powertrain Engineering Division. "Our physics-based model allows us to detect, in real time, the occurrence of lithium plating so we can adjust the charging rate to prevent battery damage while also allowing for shorter charging times."

SwRI developed and calibrated a linearized battery model for a 57 Ah nickel manganese cobalt (NMC) cell, successfully predicting when lithium plating is occurring. The model uses differential equations to calculate various battery inner states, with no need for additional

instrumentation or resources. Other state-of-the-art techniques to detect lithium plating are non-real time and involve destructive physical analysis of the cell.

The SwRI model successfully predicted the cell voltage to within $\pm 5\%$ of experimental data. The team then developed a model-based adaptive fast charge controller to optimize the charge [profile](#) for the NMC cell. The controller includes a learning feature that adjusts the charge current based on the previous cycle's charge efficiency. The controller "learns" the optimal charge profile after 10 to 20 charge cycles and balances durability, safety and performance in real time.

The team compared the SwRI charge controller to two baseline charge profiles to assess its effectiveness. The first baseline profile uses an industry-standard constant current, constant voltage strategy to intentionally initiate [lithium](#) plating. The samples aged with this profile showed significant battery capacity fade, or loss. The second baseline profile was recorded from an electric vehicle at a fast charger and enabled meaningful comparison of charge time.

"The SwRI charge controller showed several improvements compared to the two baseline profiles, including a significant decrease in capacity fade, a 35% reduction in battery charge [time](#) and an average charge efficiency of 89%," Surampudi said. "While pleased with these results, we believe there are additional improvements to be made."

Provided by Southwest Research Institute

Citation: New model, controller to optimize fast charging of electric vehicles (2021, March 17) retrieved 28 April 2024 from <https://techxplore.com/news/2021-03-optimize-fast-electric-vehicles.html>

This document is subject to copyright. Apart from any fair dealing for the purpose of private study or research, no part may be reproduced without the written permission. The content is provided for information purposes only.