


A helping hand for working robots

May 28 2021

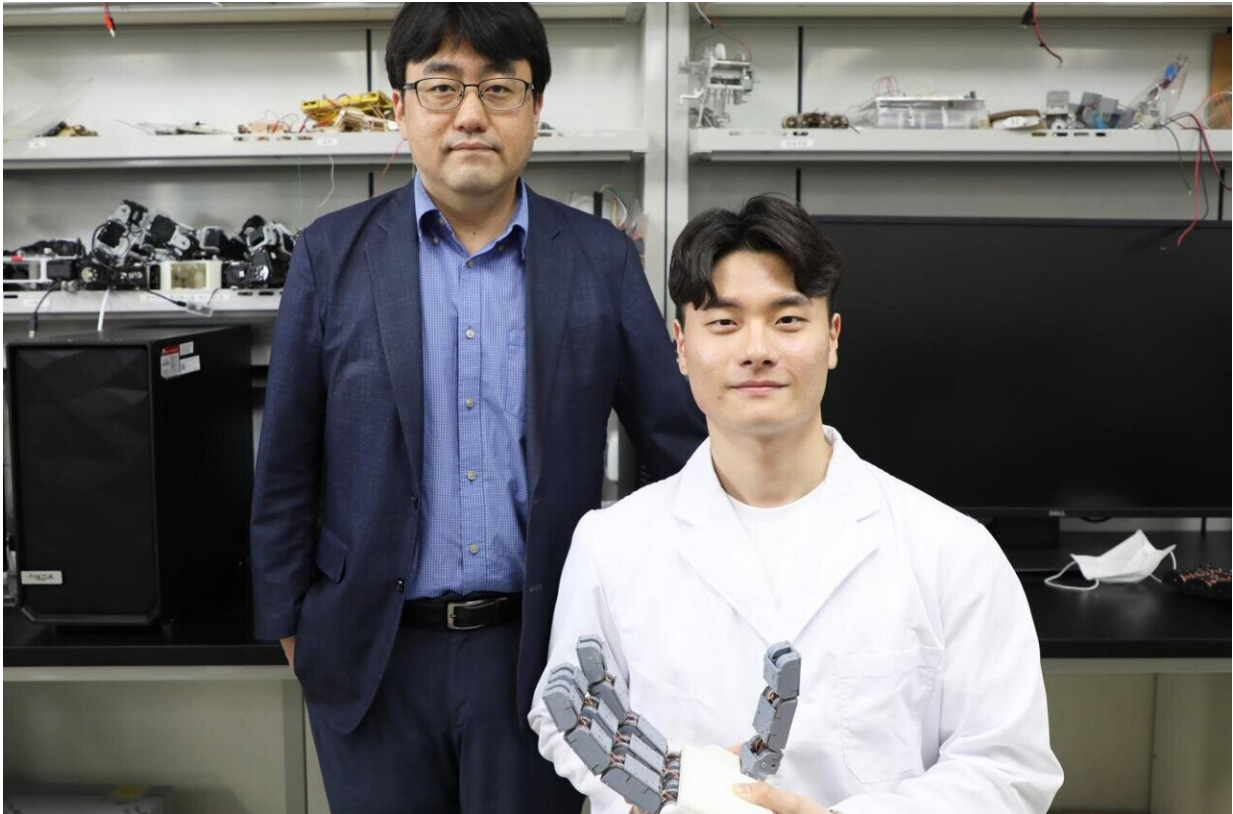

Prof. Dongwon Yun(Left) & Junmo Yang, Integrated M.S & Ph.D course student(Right). Credit: DGIST


Until now, competing types of robotic hand designs offered a trade-off between strength and durability. One commonly used design, employing a rigid pin joint that mimics the mechanism in human finger joints, can lift heavy payloads, but is easily damaged in collisions, particularly if hit

from the side. Meanwhile, fully compliant hands, typically made of molded silicone, are more flexible, harder to break, and better at grasping objects of various shapes, but they fall short on lifting power.

The DGIST research team investigated the idea that a partially-compliant [robot](#) hand, using a rigid link connected to a structure known as a Crossed Flexural Hinge (CFH), could increase the robot's lifting power while minimizing damage in the event of a collision. Generally, a CFH is made of two strips of metal arranged in an X-shape that can flex or bend in one position while remaining rigid in others, without creating friction.

"Smart industrial robots and cooperative robots that interact with humans need both resilience and strength," says Dongwon Yun, who heads the DGIST BioRobotics and Mechatronics Lab and led the research team. "Our findings show the advantages of both a [rigid structure](#) and a compliant structure can be combined, and this will overcome the shortcomings of both."

The team 3-D-printed the metal strips that serve as the CFH joints connecting segments in each robotic finger, which allow the robotic fingers to curve and straighten similar to a human hand. The researchers demonstrated the robotic hand's ability to grasp different objects, including a box of tissues, a small fan and a wallet. The CFH-jointed robot hand was shown to have 46.7 percent more shock absorption than a pin joint-oriented robotic [hand](#). It was also stronger than fully compliant robot hands, with the ability to hold objects weighing up to four kilograms.

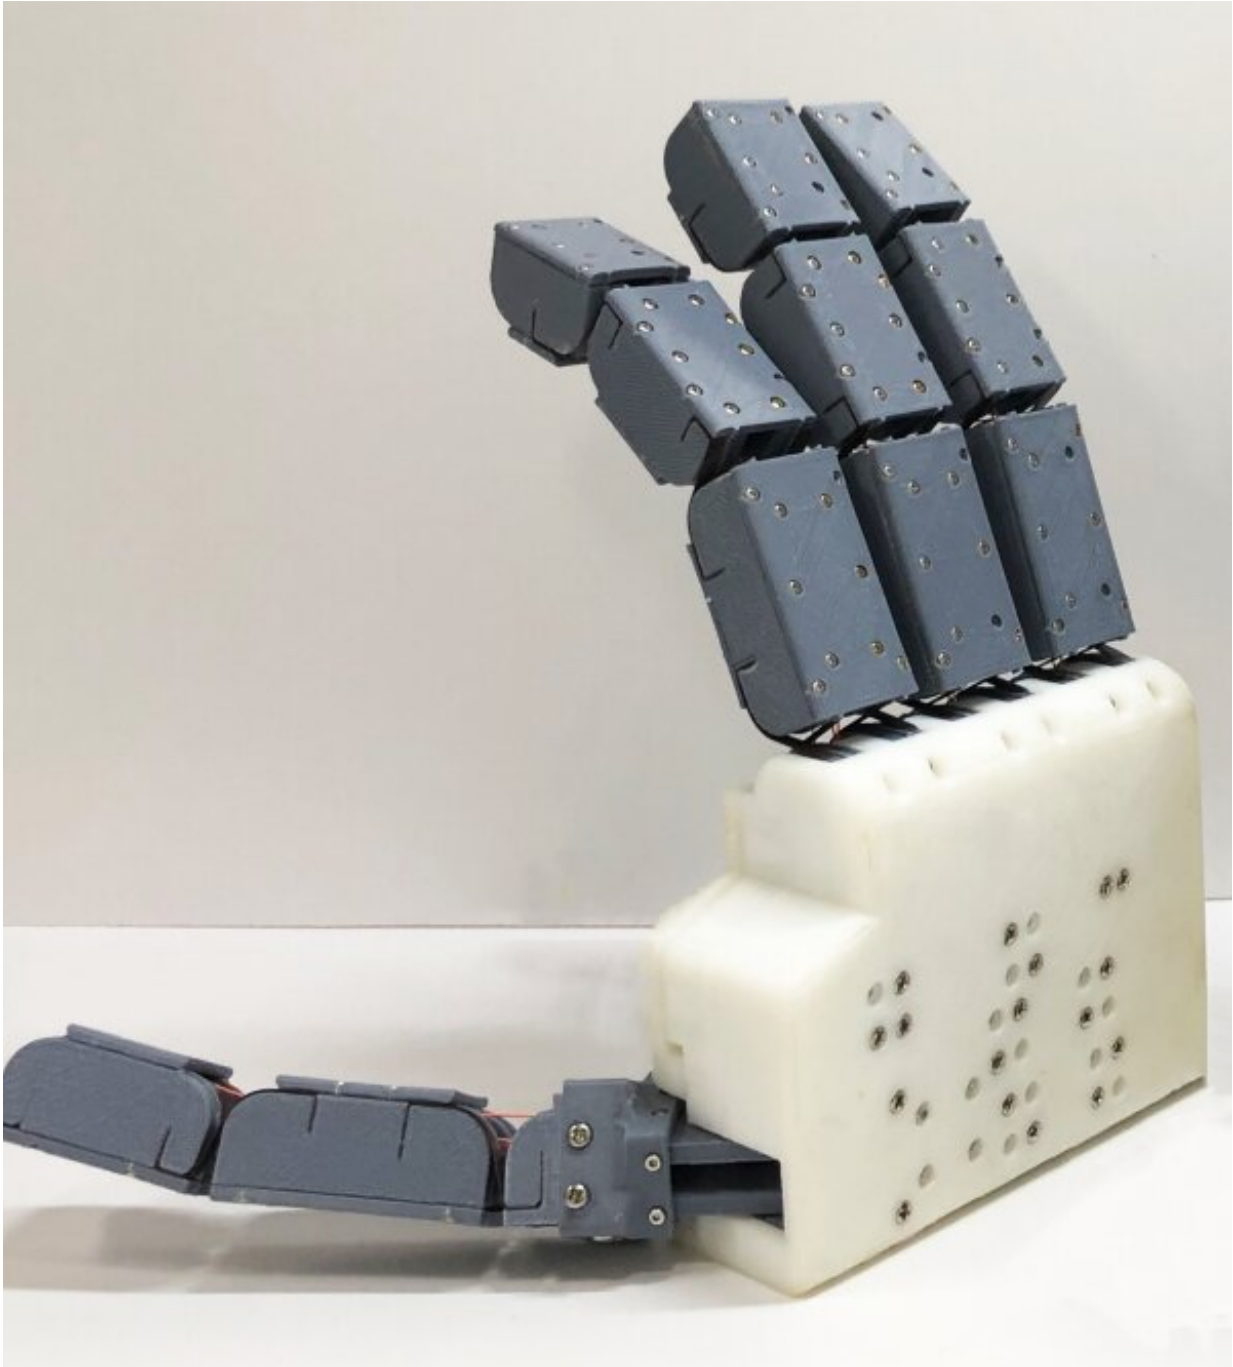

Anthropomorphic robot hand. Credit: DGIST

Further improvements are needed before robots with these partially-

compliant hands are able to go to work alongside or directly with humans. The researchers note that additional analysis of materials is required, as well as field experiments to pinpoint the best practical applications.

"The industrial and healthcare settings where robots are widely used are dynamic and demanding places, so it's important to keep improving robots' performance," says DGIST engineering Ph.D. student Junmo Yang, the first paper author.

More information: Junmo Yang et al, Shock Resistive Flexure-Based Anthropomorphic Hand with Enhanced Payload, *Soft Robotics* (2021). DOI: [10.1089/soro.2020.0067](https://doi.org/10.1089/soro.2020.0067)

Provided by DGIST (Daegu Gyeongbuk Institute of Science and Technology)

Citation: A helping hand for working robots (2021, May 28) retrieved 28 April 2024 from <https://techxplore.com/news/2021-05-robots.html>

<p>This document is subject to copyright. Apart from any fair dealing for the purpose of private study or research, no part may be reproduced without the written permission. The content is provided for information purposes only.</p>
--