


Best ways to cut carbon emissions from the cement industry explored

May 21 2021, by Caroline Brogan

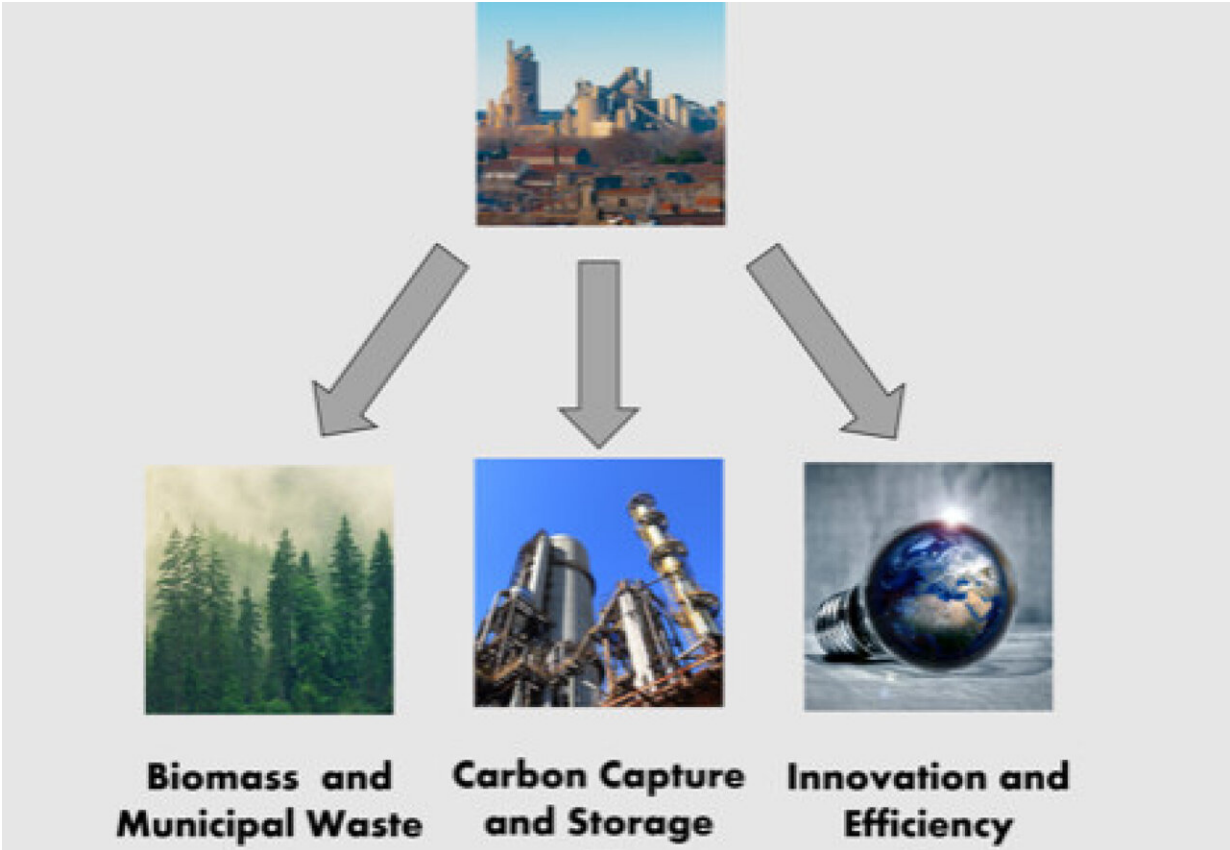

Credit: Imperial College London

A new Imperial report identifies alternative materials and carbon capture technologies as critical in decarbonising the cement industry.

Around 3.5 billion tons of Ordinary Portland Cement, a critical building material worldwide, are produced annually—but every ton emits up to 622 kg of carbon dioxide (CO₂) The [cement industry](#) contributes seven percent of global anthropogenic CO₂ emissions, with the amount of CO₂ released depending on differences in the materials used in production, the types of cement kiln used, and the fuels being burned.

In a [new paper](#), researchers at Imperial College London have considered the potentially most effective ways to decarbonise the industry. They say that, with interventions, emissions could range from 80 percent to minus 50 percent of current emissions where CO₂ is actively removed from the atmosphere.


This could be done using a combination of carbon capture and storage (CCS) and fuel and intermediate product substitutes. However, they say the most sensible solution might be to combine burning [municipal solid waste](#) with CCS, which could slash emissions to minus 20 percent of their current level.

Lead author Professor Paul Fennell, of Imperial's Department of Chemical Engineering, said: "CO₂ is a key greenhouse gas driving climate change, and it's released by several aspects of cement production. Process- and fuel-related emissions both account for a significant proportion of cement's total emissions—so both process modification and [energy efficiency](#) are important for carbon reduction. By identifying these sources and suggesting workable interventions, we hope to help decarbonise the cement industry."

The report, published in *Joule*, gives an overview of the main decarbonisation options and their interplay in terms of direct emissions from the cement production process. Identified are three key interventions with the most potential impact.

CCS

The inherent chemistry behind cement production is responsible for up to 60 percent of cement's carbon emissions, so the release of carbon is difficult to prevent. To make cement, powdered limestone is heated and combined with a variety of components, to produce an intermediary product called clinker. Forty percent of the weight of limestone is CO₂, which is released during this process.

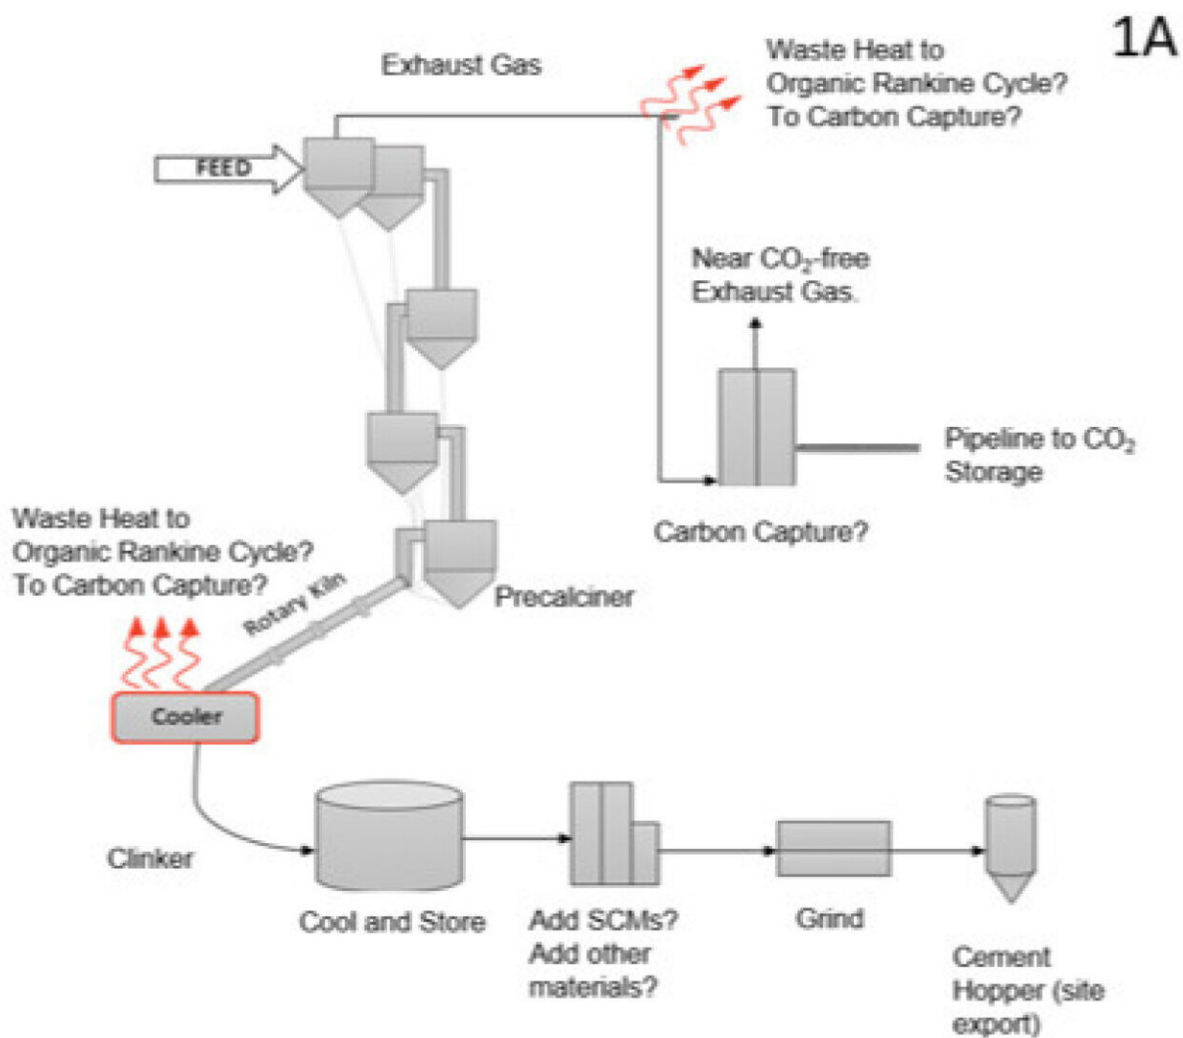

The cement production process. Credit: Imperial College London

CCS plants attached to cement kilns could capture the carbon that's released and store it where it will not enter the atmosphere. The researchers say that CCS has significant potential, with numerous pilot and larger-scale demonstrations planned.

Biomass and municipal waste

Cement production is energy intensive, requiring 3.3 Gigajoules of thermal energy per ton of clinker—so another source of carbon in the industry is the way plants are powered. Instead of using carbon-intensive fossil fuels, manufacturers could use carbon-neutral biomasses.

However, biomass is a limited resource, and the costs of using it at such a scale could be prohibitive, so it would need to be combined with municipal waste. This could be a cost saving way to reduce [fossil fuel use](#), in addition to being a relatively environmentally friendly method of waste management, particularly if care is taken to divert all recyclable material prior to use in the kiln.

Clinker alternatives

Producing clinker is carbon intensive because of the [carbon](#) released by limestone, and because of the energy required in the process. Therefore, emissions may be cut by reducing demand for clinker, such as by substituting it with waste materials like blast furnace slag and coal ash. The researchers argue that 30 to 40 percent of clinker can be substituted in this way without compromising cement strength.

Professor Fennell added: "Although this analysis can give insights into what is and is not critical for net zero or negative emissions, a full and comprehensive lifecycle analysis is needed to fully quantify emissions.

"The most striking feature of this simple analysis is that it is the underlying biologically derived component of the fuel, together with the addition of CCS that makes the biggest reductions in CO₂ emissions possible. Clinker substitution is valuable, particularly when CCS is not deployed, but very deep decarbonisation will require going further."

"Decarbonising [cement](#) production" by Paul S. Fennell, Steven J. Davis, and Aseel Mohammed, published 20 May 2021 in *Joule*.

More information: Paul S. Fennell et al, Decarbonizing cement production, *Joule* (2021). [DOI: 10.1016/j.joule.2021.04.011](https://doi.org/10.1016/j.joule.2021.04.011)

Provided by Imperial College London

Citation: Best ways to cut carbon emissions from the cement industry explored (2021, May 21) retrieved 18 April 2024 from <https://techxplore.com/news/2021-05-ways-carbon-emissions-cement-industry.html>

This document is subject to copyright. Apart from any fair dealing for the purpose of private study or research, no part may be reproduced without the written permission. The content is provided for information purposes only.