


New research shines light on perovskite solar cell performance

June 14 2021

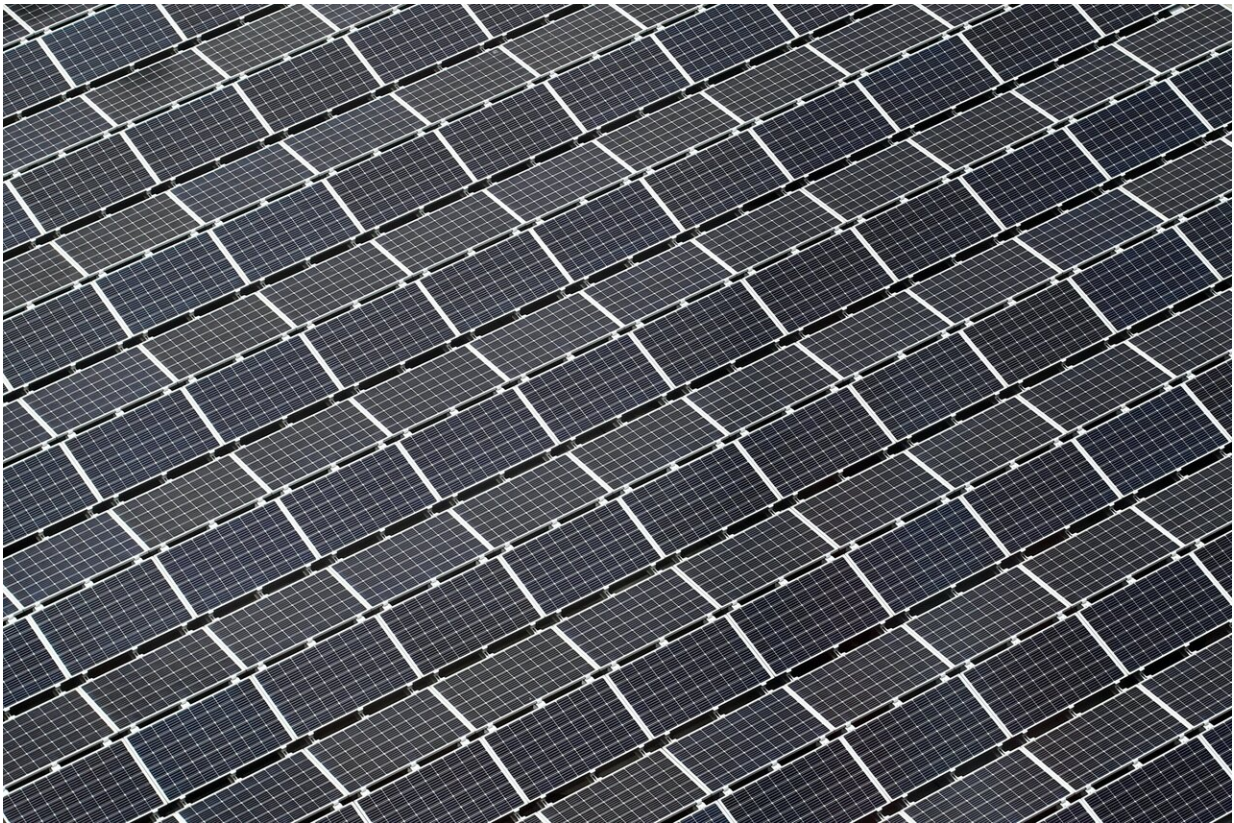

Credit: Unsplash/CC0 Public Domain

The potential of a class of materials called perovskites, to enable solar cells to better absorb sunlight for energy production, is widely known. However, this potential has yet to be fully realized, particularly under

real-world operating conditions.

New research published today in the prestigious journal *Nature Energy*, has revealed defects in a popular [perovskite](#) light absorber that impede solar cell performance. The researchers found a change in the nature and density of these 'intragrain planar defects' correlated with a change in solar cell performance.

The discovery by an international team of researchers, led by Monash University and Wuhan University of Technology, could lead to improved solar cell technology and provide another step towards reducing the use of fossil fuels for energy.

Perovskite light absorbers have the potential to improve the efficiency of established silicon solar [cells](#) by adding an additional layer that can absorb colors, or parts of the energy spectrum of sunlight, that current silicon solar cells cannot.

The highest possible performance of silicon solar cells is around 32 percent of capacity. This means only about 32 percent of the energy available in sunlight can be captured by silicon solar cells.

Placing such a perovskite solar cell on top of a silicon solar cell, known as a tandem solar cell, can effectively boost the overall performance of the stack up to roughly 42 percent.

Since small changes to the perovskite composition can tune the absorption spectrum of perovskite solar cells relatively easily, it is possible to create a perovskite solar cell that absorbs the higher energy light but lets the lower energy light pass through.

The research team used the imaging and diffraction protocol developed at the Monash Centre for Electron Microscopy (MCEM) to study the

crystal structure of a range of perovskite solar cell materials in their pristine state.

Lead corresponding author, Professor Joanne Etheridge, Director of the MCEM and Professor in the Department of Materials Science and Engineering, said disruptions in the periodic crystal structure can have a strong influence on the material's electronic properties.

"Being able to map the local crystal structure of a thin film of perovskite light absorber and correlate this with the overall solar cell device performance provides exciting new insights into how device performance can be improved," Professor Etheridge said.

Lead author, Dr. Wei Li from the Wuhan University of Technology, said, "To make a good solar cell, a material must be able to transform sunlight into electricity efficiently and do so outdoors for many decades.

"Producing electricity from light involves absorbing photons to generate excited electrons, separating these electrons from the holes they left behind before they recombine, and finally extracting the separated electrons and holes in an external circuit.

"How these [charge carriers](#) behave within a crystalline semiconductor, and subsequently affect the overall performance of a solar cell, strongly depends on the crystallographic properties of the material."

The research team was able to control the presence of certain types of crystal defects—intragrain planar defects—by tuning the chemical composition of the perovskite films.

Planar defects are imperfections in the arrangement of atoms that occur on certain crystal planes.

These imperfections break the otherwise continuously repeating arrangement of atoms in a crystal lattice. Intragrain planar defects are a special type of disruption to the arrangement of atoms in the perovskite material.

The type and density of these defects in $\text{MA}_{1-x}\text{FA}_x\text{PbI}_3$ (a type of perovskite solar cell) was changed by tuning the ratio of the small methylammonium (MA) molecules relative to the large formadinium (FA) molecules.

The compositions that contained no intragrain planar defects had the best solar cell performance. This research suggests that such crystal defects can have an important influence on perovskite solar cells and may be a factor limiting their current performance.

Joint lead author, Dr. Mathias Rothmann, conducted part of this work during his Ph.D. at Monash University and is now continuing work on perovskite solar cells at Oxford University. Dr. Rothmann said this information opens new avenues for improving perovskite solar cell performance.

"For example, a blacksmith introduces defects in hot steel by hammering it, locking the defects in by quenching the steel in water, making the steel harder but less malleable as a result. In conventional silicon solar cells, however, defects are often associated with shorter charge carrier diffusion lengths and lifetimes, resulting in lower power conversion efficiencies," he said.

"We found a similar reduction in performance with the presence of these intragrain planar defects in these perovskite [solar cells](#). We hope that our work can make a contribution towards a fossil fuel-free future based on the abundant availability of sunlight."

More information: Wei Li et al, The critical role of composition-dependent intragrain planar defects in the performance of $\text{MA}_{1-x}\text{FA}_x\text{PbI}_3$ perovskite solar cells, *Nature Energy* (2021). [DOI: 10.1038/s41560-021-00830-9](https://doi.org/10.1038/s41560-021-00830-9)

Provided by Monash University

Citation: New research shines light on perovskite solar cell performance (2021, June 14) retrieved 19 April 2024 from <https://techxplore.com/news/2021-06-perovskite-solar-cell.html>

This document is subject to copyright. Apart from any fair dealing for the purpose of private study or research, no part may be reproduced without the written permission. The content is provided for information purposes only.