



Perovskite solar cells with atomically coherent interlayers on SnO₂ electrodes



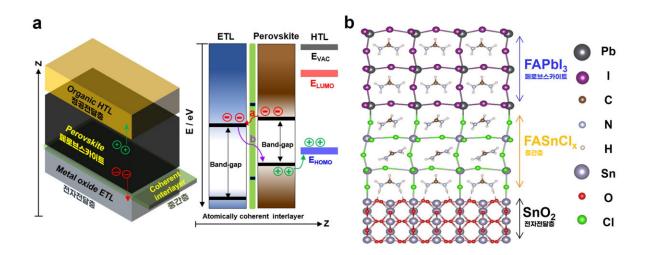

Credit: Ulsan National Institute of Science and Technology

A research team, led by Professor Sang II Seok in the School of Energy and Chemical Engineering at UNIST has set a new efficiency record for a perovskite solar cell (PSC) at 25.8% by forming an interlayer between electron-transporting and perovskite layers to minimize interfacial defects, contributing to the decrease in the power conversion efficiencies. The new record, according to the research team, is the world's highest power conversion efficiency (PCE) reported so far. Besides, the record, certified by National Renewable Energy Laboratory (NREL), is also the highest confirmed conversion efficiency of 25.5%.




In perovskite solar cells, the interfaces between the perovskite and charge-transporting layers contain high concentrations of defects, specifically deep-level defects, which substantially reduce the power conversion efficiency of the devices, noted the research team. Efforts have been made to reduce these interfacial defects have focused mainly on surface passivation. Yet, passivating the perovskite surface that interfaces with the electron-transporting layer has been difficult, because the surface-treatment agents on the electron-transporting layer may dissolve while coating the perovskite thin film.


"Alternatively, interfacial defects may not be a concern if a coherent interface could be formed between the electron-transporting and <u>perovskite layers</u>," said the research team.

In this study, the research team reported the formation of an interlayer between a SnO_2 electron-transporting layer and a halide perovskite lightabsorbing layer, achieved by coupling Cl-bonded SnO_2 with a Clcontaining perovskite precursor.



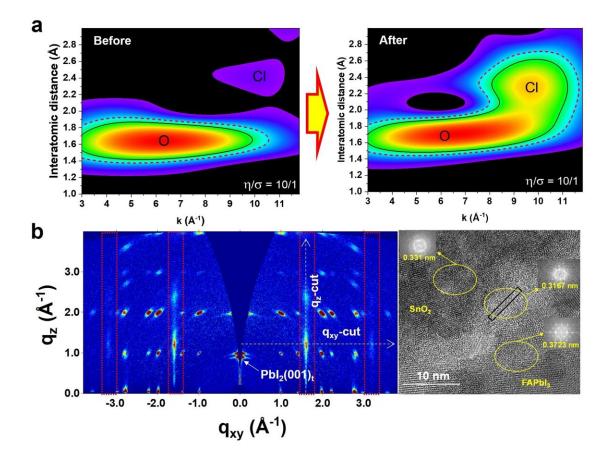

Credit: Ulsan National Institute of Science and Technology

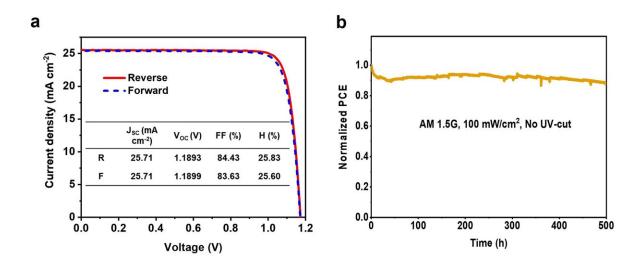



Credit: Ulsan National Institute of Science and Technology

This interlayer, according to the research team, has atomically coherent features, which enhance charge extraction and transport from the perovskite layer, and fewer interfacial defects. "The existence of such a coherent interlayer allowed us to fabricate perovskite solar cells with a power conversion efficiency of 25.8% under standard illumination," the team said, adding that unencapsulated devices maintained about 90% of their initial efficiency even after continuous light exposure for 500 hours. They anticipate that such findings provide guidelines for designing defect-minimizing interfaces between metal halide perovskites and electron-transporting layers.

The findings of this research have been published in the October 2021 issue of *Nature*.

More information: Hanul Min et al, Perovskite solar cells with atomically coherent interlayers on SnO_2 electrodes, *Nature* (2021). <u>DOI:</u> <u>10.1038/s41586-021-03964-8</u>

Provided by Ulsan National Institute of Science and Technology

Citation: Perovskite solar cells with atomically coherent interlayers on SnO₂ electrodes (2021, October 25) retrieved 25 April 2024 from <u>https://techxplore.com/news/2021-10-perovskite-solar-cells-atomically-coherent.html</u>

This document is subject to copyright. Apart from any fair dealing for the purpose of private



study or research, no part may be reproduced without the written permission. The content is provided for information purposes only.