


# 'Workhorse' of photovoltaics combined with perovskite in tandem for the first time

February 24 2022

---

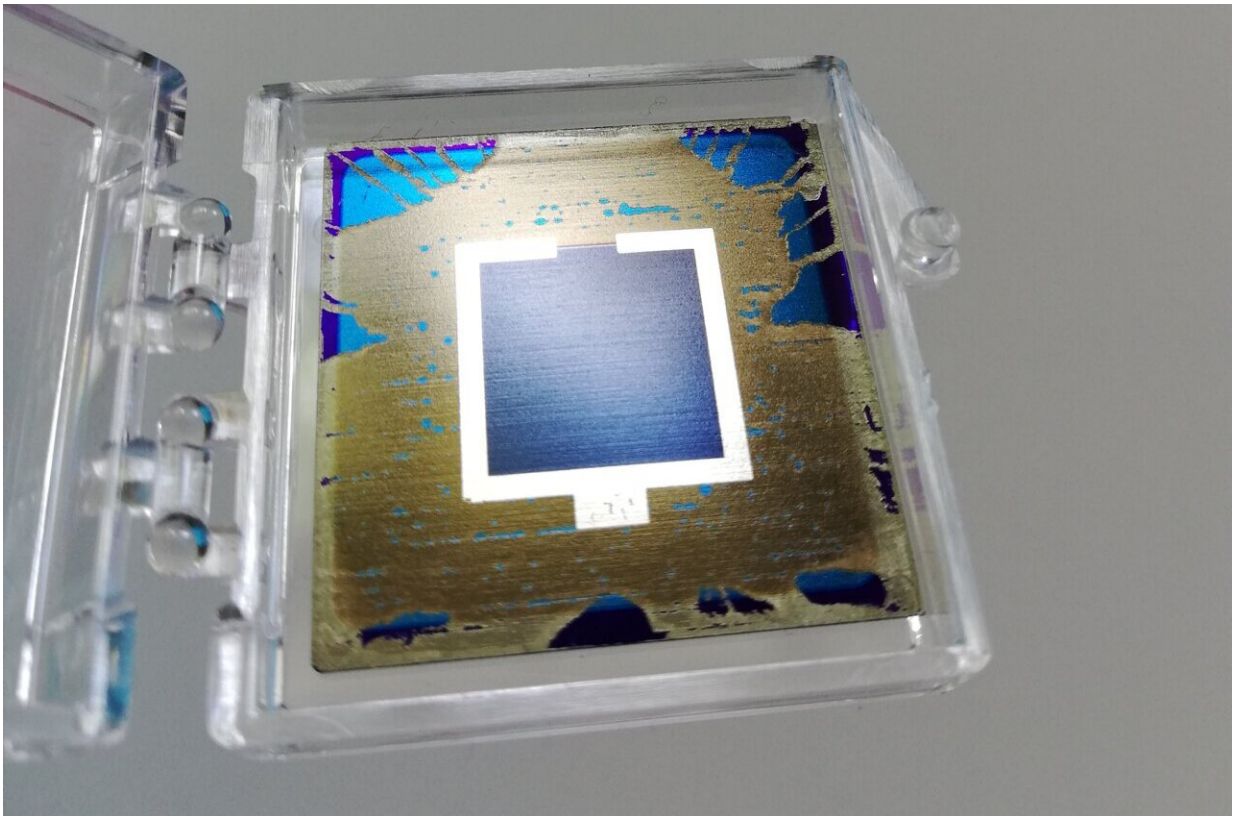

A standard silicon solar cell is combined with a perovskite top cell. This tandem solar cell could reach high efficiencies. Credit: Silvia Mariotti / HZB

Tandem cells made of silicon and perovskite are able to convert the broad energy spectrum of sunlight into electrical energy more efficiently

than the respective single cells. Now, for the first time, two teams from HZB and ISFH Hameln have succeeded in combining a perovskite top cell with a so-called PERC/POLO silicon cell to form a tandem device. This is an important achievement, since PERC silicon cells on p-type silicon are the "workhorse" of photovoltaics, with a market share of about 50% of all solar cells produced worldwide. They are largely optimized, long-term stable and temperature stable. Therefore, it is particularly interesting for the commercialisation of a perovskite-silicon tandem technology to develop a "perovskite tandem upgrade" for PERC cells. The cooperation took place within the framework of the joint project P3T, which is funded by the Federal Ministry of Economics and coordinated by HZB.

The team at ISFH used an industry-compatible PERC process for the backside contact of the silicon bottom [cells](#). On the front side of the wafer, another industrialisable technology was used, the so-called POLO contact, which was adapted here for the small-area proof of concept cells.

## Perovskite expertise at HZB

The following process steps took place at HZB: A tin-doped indium oxide recombination layer was applied as a contact between the two subcells. On top of this, a [perovskite](#) cell was processed with a layer sequence similar to that in the current world record tandem cell on n-type silicon heterojunction cells, made by HZB. The first perovskite PERC/POLO [tandem cells](#) produced in this way achieve an efficiency of 21.3% on an active cell area of about 1 cm<sup>2</sup>. This efficiency is thus still below the efficiency of optimized PERC cells in this feasibility study. "However, initial experimental results and optical simulations indicate that we can significantly improve the performance through process and layer optimisation," explains Dr. Lars Korte, the corresponding author of the study.

## PCE estimated at 29.5 %

The experts estimate the Power Conversion Efficiency (PCE) of these perovskite/silicon tandem [solar cells](#) with PERC-like sub-cell technology at 29.5 %. The next steps for further efficiency increases are already clear: Dr. Silvia Mariotti from the HZB team had identified the coverage of the silicon surface by the perovskite as potential for improvement. "For this purpose, one could adapt the surface of the [silicon](#) wafers and thus quickly increase the efficiency to about 25%," says Mariotti. This is already significantly higher than the efficiency of PERC single cells.

The research was published in *Solar RRL*.

**More information:** Silvia Mariotti et al, Monolithic Perovskite/Silicon Tandem Solar Cells Fabricated Using Industrial p-Type Polycrystalline Silicon on Oxide/Passivated Emitter and Rear Cell Silicon Bottom Cell Technology, *Solar RRL* (2022). [DOI: 10.1002/solr.202101066](https://doi.org/10.1002/solr.202101066)

Provided by Helmholtz Association of German Research Centres

Citation: 'Workhorse' of photovoltaics combined with perovskite in tandem for the first time (2022, February 24) retrieved 2 April 2024 from <https://techxplore.com/news/2022-02-workhorse-photovoltaics-combined-perovskite-tandem.html>

This document is subject to copyright. Apart from any fair dealing for the purpose of private study or research, no part may be reproduced without the written permission. The content is provided for information purposes only.
---