


An alternative low-cost technique to produce metal powders for 3D printing

April 6 2022, by Monmita Bhar

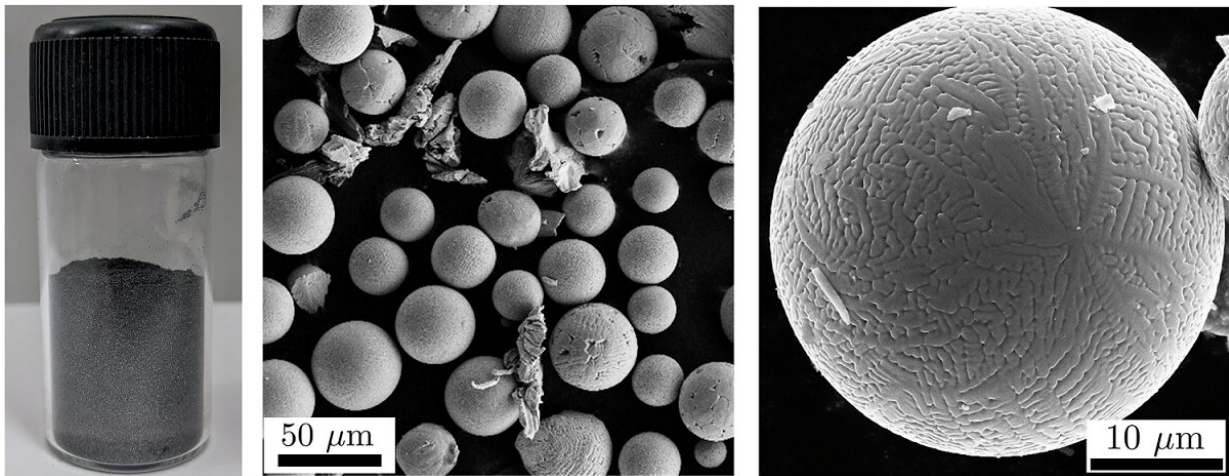

Panel showing metal powders produced using the abrasion-based process. Left: Typical final powder stock after processing. Middle: SEM image showing distribution of powder sizes. Right: Typical single powder particle, approximately 30-50 micrometers in diameter. Credit: Laboratory for Advanced Manufacturing & Finishing Processes (LAMFiP), IISc (mecheng.iisc.ac.in/lamfip)

Additive manufacturing (AM), also known as metal 3D printing, creates objects by addition of material, layer by layer. A major source material for AM is metal powder, which is predominantly produced using a technique called atomization, in which a molten metal stream is broken up into fine droplets using air or water jets. However, despite its

widespread use, atomization returns poor yield, is expensive, and is inflexible in the types of materials it can handle. A team of researchers at the Indian Institute of Science (IISc) led by Koushik Viswanathan, Assistant Professor at the Department of Mechanical Engineering, has identified an alternative technique to produce metal powders that side-steps these problems. This has interesting implications for AM processes in general, including areas such as the manufacture of biomedical implants.

In the metal grinding industry, the material removed—called swarf—is often discarded as a waste product. It is commonly stringy in shape, like metal chips, but it often also throws up perfectly spherical particles. Scientists have long theorized that these bodies go through a melting process to take up the [spherical shape](#), thus posing some interesting questions—does the heat from the grinding cause the melting? Is there melting at all? Viswanathan's team showed that these powdery metal bodies form as a result of melting due to [high heat](#) from oxidation, an exothermic reaction, at the surface layer. They then refined this process to produce large quantities of spherical powders, which are collected and processed further to be used as stock material in AM. Their study shows that these particles perform just as well as commercial gas atomized powders in the context of metal AM.

Priti Ranjan Panda, a Ph.D. student at IISc's Centre for Product Design and Manufacturing and one of the authors of the study, says, "We have an alternative, more economical and inherently scalable route for making metal powders, and the quality of the final powders appear to be very competitive when compared with conventional gas atomized powders."

About the applications of their findings, Viswanathan explains, "There has been significant recent interest in adopting metal AM because by nature, it enables significant customization and allows design freedom. However, the large cost of stock metal powders has been the stumbling

block. We hope that our work will open new doors to making cheaper and more accessible metal powders."

"Reducing the cost of the AM process (via economical powders) can widen the range of materials in situations such as manufacturing of biomedical implants, which could become cheaper and more accessible," adds Harish Singh Dhami, a Ph.D. student at the Department of Mechanical Engineering and co-author of this study. The researchers say that making [metal powder](#) using abrasion also has potential in other high-performance applications such as in [aircraft engines](#), where a high degree of specificity and sophistication are required.

Currently, metal powders are typically produced at an atomization facility, requiring transport for casting and recycling, thus setting up a big supply chain. This works for abundant metals like aluminum, Viswanathan points out, but for strategic materials (such as tantalum and lithium), where extraction alone is a complex process, it would be favorable to have a scalable process for producing [metal powders](#). Then, in principle, the entire supply chain can be housed within a single facility—a possibility that their technique could offer.

More information: Harish Singh Dhami et al, Production of powders for metal additive manufacturing applications using surface grinding, *Manufacturing Letters* (2022). [DOI: 10.1016/j.mfglet.2022.02.004](https://doi.org/10.1016/j.mfglet.2022.02.004)

Provided by Indian Institute of Science

Citation: An alternative low-cost technique to produce metal powders for 3D printing (2022, April 6) retrieved 26 April 2024 from <https://techxplore.com/news/2022-04-alternative-low-cost-technique-metal-powders.html>

This document is subject to copyright. Apart from any fair dealing for the purpose of private study or research, no part may be reproduced without the written permission. The content is provided for information purposes only.