


# An in-situ generated composite solid-state electrolyte for high-voltage lithium metal batteries

April 22 2022

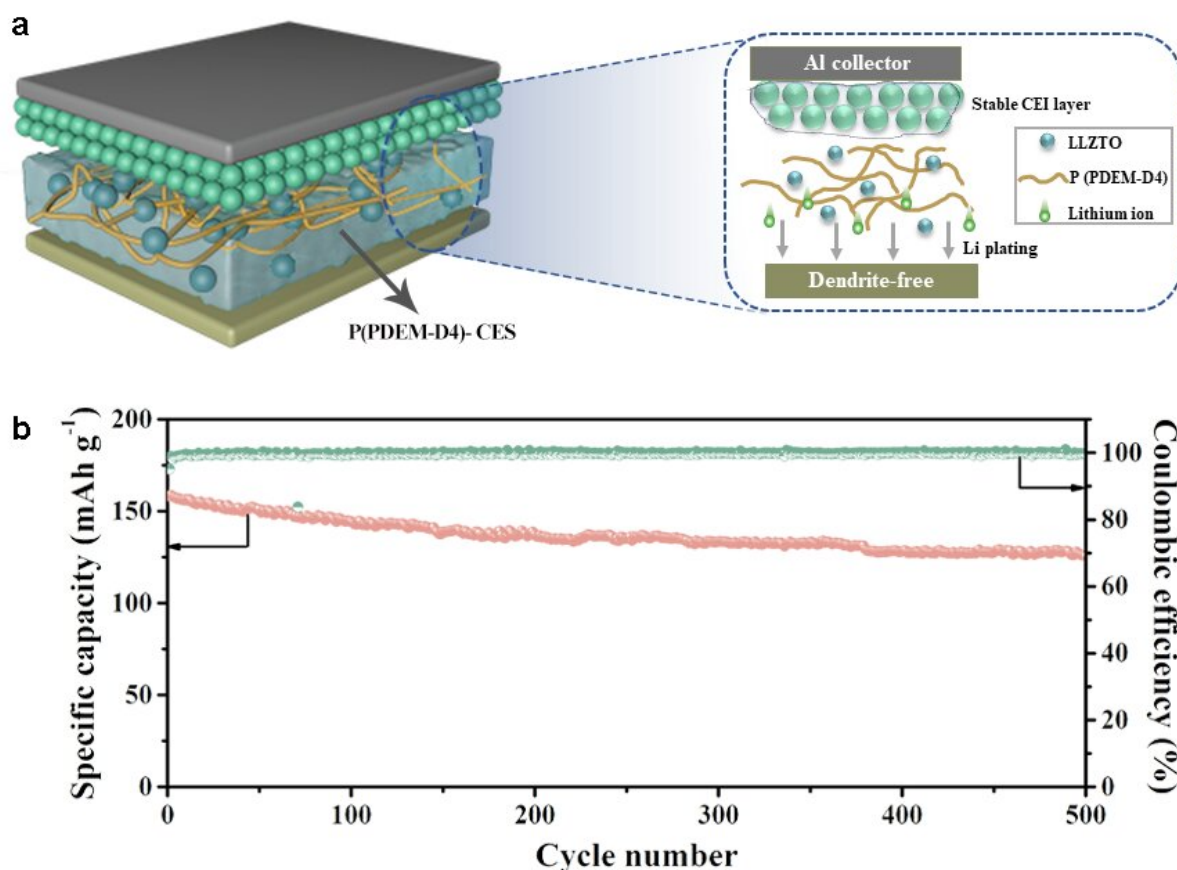

Schematic diagram of CSE design and cycling performance of the as-assembled 4.4 V-class LiCoO<sub>2</sub>/Li metal battery. Credit: Science China Press

Solid-state electrolyte (SSE) is promising in next-generation lithium (Li) metal batterie (LMB) applications because of its significantly enhanced safety and more compatible interface characteristics than flammable, volatile traditional liquid electrolyte. Combining the strengths of inorganic solid-state electrolytes and solid-state polymer electrolytes, composite solid electrolytes (CSEs) are practically more viable for commercial applications. However, only a few efforts have achieved high-voltage ( $>4.3$  V vs.  $\text{Li/Li}^+$ ) LMBs with distinguished comprehensive performance, which is mainly attributed to the fact that CSEs with both high ionic conductivity and good compatibility with electrodes are difficult to obtain. Furthermore, the relatively tedious fabrication process, such as the ex-situ solution casting technique accompanied by the use of noxious organic solvents, can hardly meet the practical needs of large-scale commercial production.

Recently, Prof. Guanglei Cui developed novel CSE (denoted as P(PDEM-D4)-CSE) comprising a star-shaped siloxane-based electrolyte coupled with LLZTO ceramic filler. P(PDEM-D4)-CSE was prepared through facile in-situ polymerization of the electrolyte precursor solution containing 2,4,6,8-tetramethyl-2,4,6,8-tetravinylcyclotetrasiloxane (D4), poly([ethylene glycol](#)) methyl ether acrylate (PDEM), lithium difluoro(oxalate)borate ( $\text{LiDFOB}$ ), and LLZTO particles.

Among them, D4, as a part of the polymer backbone, can effectively increase the free volume for the segmental motions of polymer chains, thereby enhancing ionic conductivity. PDEM, as a  $\text{Li}^+$  carrier, provides channels for Li-ion transport.  $\text{LiDFOB}$ , as the Li source, supplies  $\text{Li}^+$  and  $\text{DFOB}^-$  and participates in the construction of the interface film. LLZTO, as an active ceramic filler, not only enhances the segmental motion of the polymer matrix by reducing crystallinity and increasing the free volume of the polymer matrix, which helps construct more channels for ion transport, but also acts as the anionic receptor that promotes the dissociation of Li salts and the increase of free Li-ion

concentration.

P(PDEM-D4)-CSE exhibits high ionic conductivities (i.e.,  $4.0 \times 10^{-5}$ ,  $1.68 \times 10^{-4}$ , and  $5.73 \times 10^{-4} \text{ S}\cdot\text{cm}^{-1}$  at 30°C, 60°C, and 100°C, respectively). Furthermore, this CSE can induce more uniform, reversible Li plating/stripping behaviors, mainly owing to the formation of compatible solid [electrolyte](#) interface. As a result, the as-developed CSE enables long-life 4.4 V-class solid-state LMBs based on a  $\text{LiCoO}_2$  cathode, which deliver 79.7% capacity retention and 99.74% average Coulombic efficiency after 500 cycles at a 0.5 C rate. The results are published in *Science China Chemistry*.

**More information:** Qinglei Wang et al, An in-situ generated composite solid-state electrolyte towards high-voltage lithium metal batteries, *Science China Chemistry* (2022). [DOI: 10.1007/s11426-022-1221-4](#)

Provided by Science China Press

Citation: An in-situ generated composite solid-state electrolyte for high-voltage lithium metal batteries (2022, April 22) retrieved 6 May 2024 from <https://techxplore.com/news/2022-04-in-situ-composite-solid-state-electrolyte-high-voltage.html>

This document is subject to copyright. Apart from any fair dealing for the purpose of private study or research, no part may be reproduced without the written permission. The content is provided for information purposes only.
---