


Soft robotic origami crawlers

April 13 2022, by Thamarasee Jeewandara

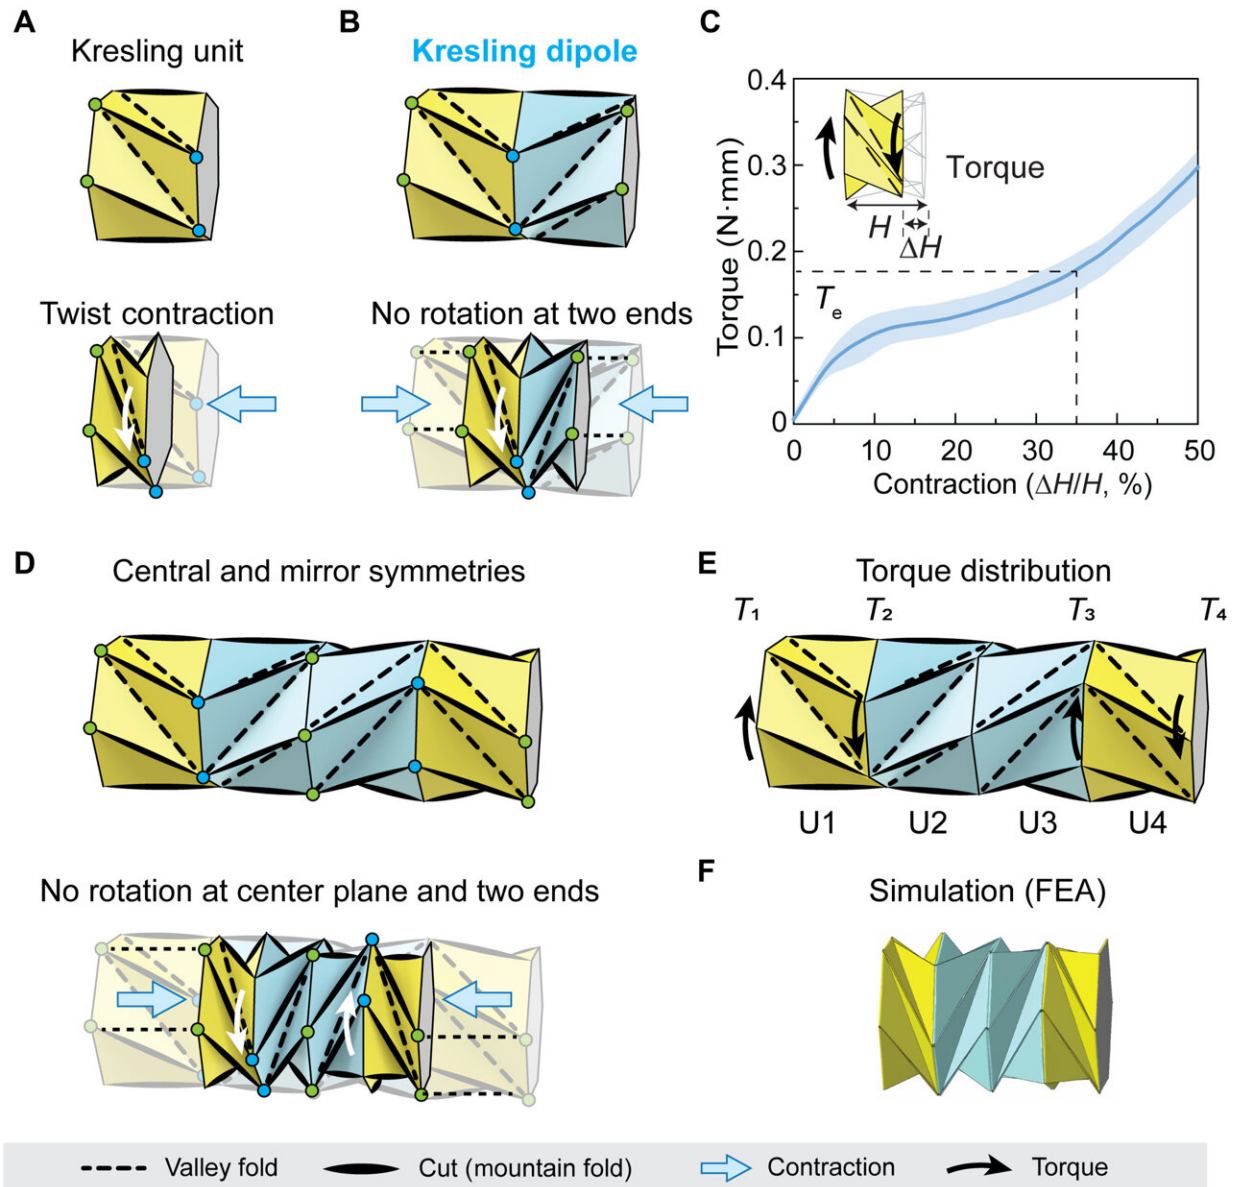

Mechanism of the four-unit Kresling crawler based on the Kresling dipole. (A) Schematic of a Kresling unit, showing contraction coupled with a twist

deformation. (B) Schematic of a Kresling dipole made of two standard Kresling units with reverse crease directions, showing no rotation at the two ends (green circles) but rotation at the center plane (blue circles) during contraction. (C) The experimentally measured torque contraction curve of the Kresling unit.


Contraction is defined as $\Delta H/H$, where H is the initial height of the unit and ΔH is the difference between the initial and contracted heights. Parameter T_e is defined as the corresponding torque at 35% contraction of the unit for effective crawling motion. The solid line is the averaged responses of three Kresling unit samples, and the shaded region represents the range of responses. (D) Schematic of the Kresling crawler made of two Kresling dipoles, showing no rotation at the center plane and two ends. (E) The required torque distribution to actuate the Kresling crawler for simultaneous contraction of all units. (F) FEA verification of the derived torque distribution for simultaneous contraction of all units.

Credit: *Science Advances* (2022). DOI: 10.1126/sciadv.abm7834

Materials scientists aim to develop biomimetic soft robotic crawlers including earthworm-like and inchworm-like crawlers to realize locomotion via in-plane and out-of-plane contractions for a variety of engineering applications. While such devices can show effective motion in confined spaces, it is challenging to miniaturize the concept due to complex and limited actuation. In a new report now published in *Science Advances*, Qiji Ze and a team of scientists in mechanical engineering and aerospace engineering at Stanford University and the Ohio State University, U.S., described a magnetically actuated, small-scale origami crawler exhibiting in-plane contraction. The team achieved contraction mechanisms via a four-unit Kresling origami assembly to facilitate the motion of an untethered robot with crawling or steering capacity. The crawler overcame large resistances in severely confined spaces due to its magnetically tunable structural stiffness and anisotropy. The setup provided a contraption for drug storage and release with potential to serve as a minimally invasive device in biomedicine.

Navigating complicated terrains

Bioinspired crawling [motion](#) shows adaptation to complicated terrains due to its [soft deformable dimensions](#). Researchers aim to engineer crawling for a variety of applications in limited or confined environments, including [extraterrestrial exploration](#), [tube inspection](#), and [gastrointestinal endoscopy](#). Origami provides an appropriate method to generate contraction relative to structural folding, which can be adapted to [engineer robotic crawlers](#). The team described [Kresling patterns](#); a specific type of bioinspired, origami pattern used to generate axial contraction under torque or compressive force, coupled with a twist from the relative rotation of the device units. Ze et al illustrated a magnetically actuated small-scale origami crawler to induce effective in-plane crawling motions. The scientists developed a four-unit Kresling assembly and verified torque distribution on the crawler using [finite element analysis](#) to induce motion. The setup also provided drug storage and release capabilities to illustrate the multifunctional crawler.

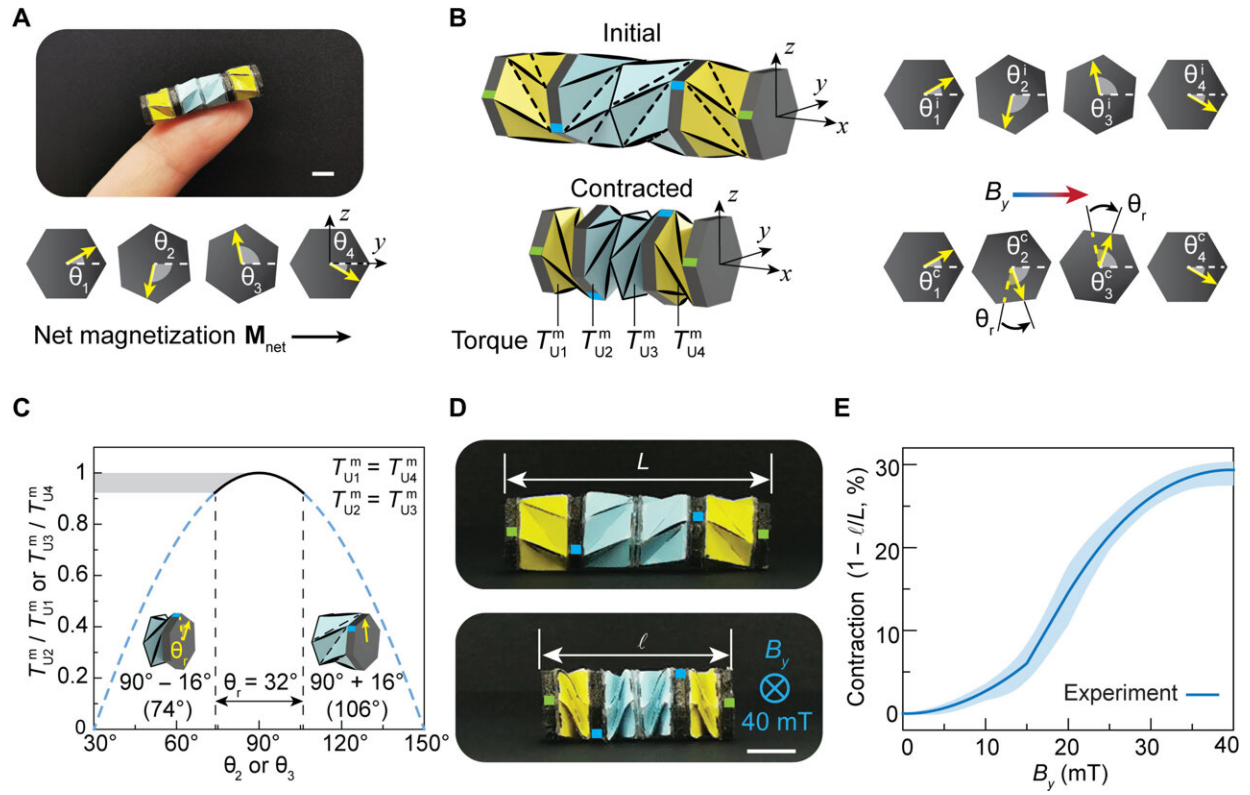

Magnetic actuation mechanism of the Kresling crawler. (A) Image of a fingertip holding the fabricated Kresling crawler and designed magnetization directions of attached four magnetic plates for distributed torques. (B) Crawler configurations and magnetization directions at the initial state and the contracted state. B_y is the magnetic field applied to the crawler along its net magnetization direction. Angle θ_r is the total rotation angle of θ_2 or θ_3 during contraction. T_{U1}^m , T_{U2}^m , T_{U3}^m , and T_{U4}^m are torque magnitudes on units U1, U2, U3, and U4 under magnetic actuation, respectively. Green marks on the vertices of the magnetic plates indicate no rotation at the two ends of the Kresling crawler. (C) Torque ratio between units U1 and U2 (U4 and U3) during contraction. Contraction of the unit of 35% (rotation angle θ_r of 32°) is defined as an effective crawling motion under a reasonably small torque. Note that angles θ_1 and θ_4 stay unchanged during contraction. Angles θ_2 and θ_3 are designed to swing between 106° and 74° to minimize the dynamic fluctuation of magnetic torques during contraction. (D) The magnetically actuated contraction under a magnetic field of 40 mT. (E) Characterization of the Kresling crawler contraction at different magnetic field magnitudes. Contraction is defined as $1 - \ell/L$, where L and ℓ are lengths of the crawler at the initial state and after contraction, respectively. The

solid line is the averaged responses of three Kresling crawler samples, and the shaded region represents the range of responses. Scale bars, 5 mm. Credit: *Science Advances* (2022). DOI: 10.1126/sciadv.abm7834

The experiments


During the experiments, Ze et al showed clockwise or anticlockwise twisting direction based on the crease direction of the Kresling unit. For translational crawling, they designed the Kresling crawler to avoid [lateral movement](#), and accomplished this by introducing the Kresling dipole; a phenomenon comprised of two Kresling units with similar geometry and reverse crease direction, to show mirror symmetry. The team designed the unit to be either [monostable or bistable](#). Monostable functionality facilitated smooth and continuous deformation as well as automatic recovery, to return to the stress-free initial state of the crawler after releasing the applied loading. The team showed the necessity for torque balance of the whole system for a purely translational crawling motion and verified torque distribution by simulating contractile motions of the crawler via finite element analysis.

Actuation methods: Magnetic actuation


A



B

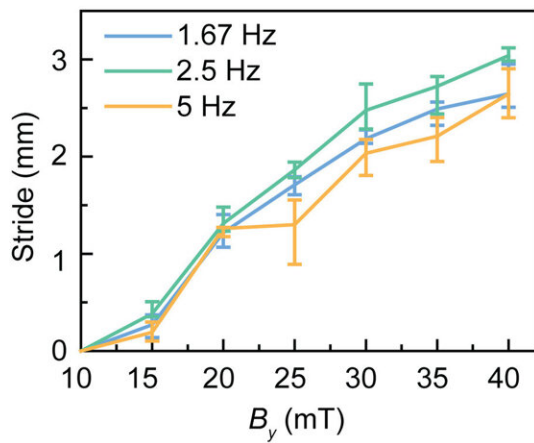


C

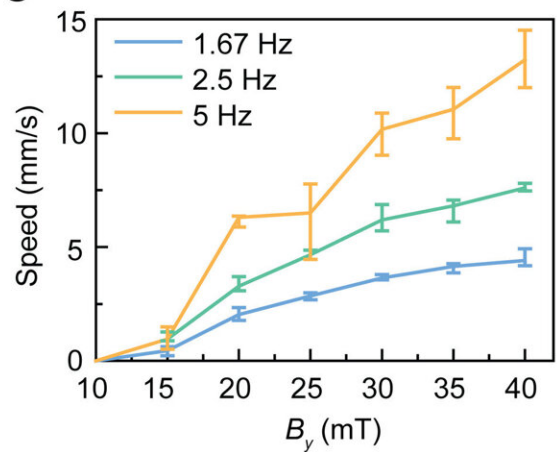

Crawling mechanism of the Kresling robot. (A) Single stride of the Kresling crawler under a magnetic field of 40 mT. Scale bar, 5 mm. (B) Stride and (C) speed characterization of crawling motion at various magnetic field magnitudes and frequencies. Credit: *Science Advances* (2022). DOI: 10.1126/sciadv.abm7834

Ze et al provided torque distribution for the crawler to achieve the desired levels of simultaneous contraction, relative to an appropriate


actuation method. [Magnetic actuation](#) is an ideal option since it provides untethered fast responses for real-time manipulation of the crawler in a confined space. The process can also isolate the power and regulate the system for a variety of applications including in vivo drug delivery and additionally showed capacity for selective activation of deformable units of origami assemblies for effective motion. Ze et al established the soft robotic crawlers by attaching four magnetic plates made of silicone embedded with hard magnetic particles to tune the density of magnetization after adjusting the volume fraction of magnetic particles. They better defined magnetic actuation by developing a local right-handed coordinate system and experimentally verified magnetic actuation, then induced friction by designing two feet for the robot made of polymer and acetate tape. The feet imparted anisotropic friction to the front and rear regions of the robotic crawler to facilitate translational motion.

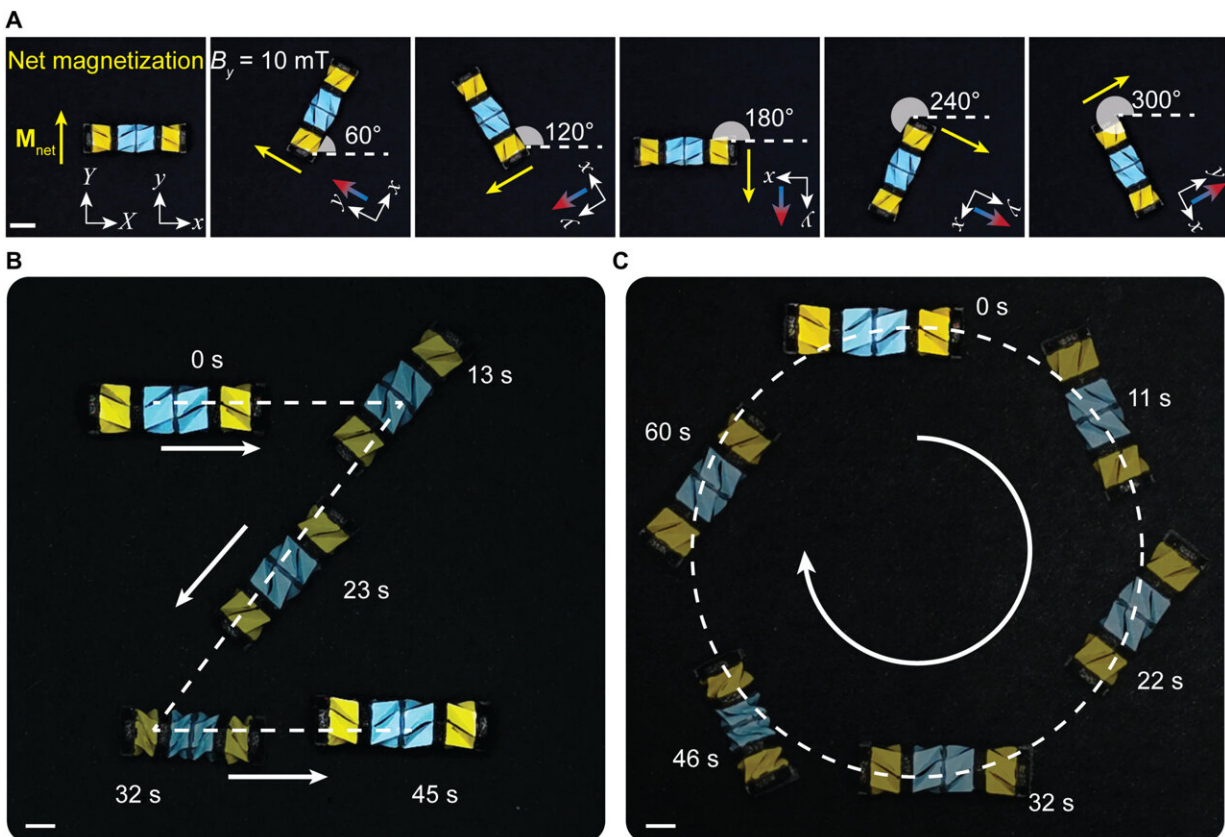

Steering and navigation of the Kresling crawler. (A) The steering mechanism. (X and Y) and (x and y) refer to the global and local (deformed) configurations, respectively. The crawler always tends to align its net magnetization M_{net} with the applied magnetic field direction. (B) The “Z” crawling path (three straight segments) at selected times. (C) The “O” crawling path (continuous angular changes) at selected times. Scale bars, 5 mm. Credit: *Science Advances* (2022). DOI: 10.1126/sciadv.abm7834

Steering capacity in biomedical environments

The research team enabled the robots to navigate complex environments, where the magnetically actuated Kresling crawler steered with multiple degrees of freedom, compared to [existing crawlers](#). In a 10-mT [magnetic field](#), for instance, the team accomplished rigid body rotation of the crawler, in addition to continuous changes in navigation around an “O” path at a magnetic field of 40 mT. This capacity to steer will be useful in biomedical environments, where large resistance from contact between tissues and organs can hinder the motion of soft machines within limited spaces. The scientists ultimately developed a Kresling crawler to crawl in an agile manner to steer under precise magnetic regulation and move in confined spaces for biomedical applications, including [endoscopy](#) or on-demand drug release [as well as biopsy](#). Ze et al envision the integration of mini cameras, forceps, and drug pills onto the setup to facilitate these functions. As proof of concept, they demonstrated the capacity to store and release drugs from the inner cavity of the Kresling origami crawler.

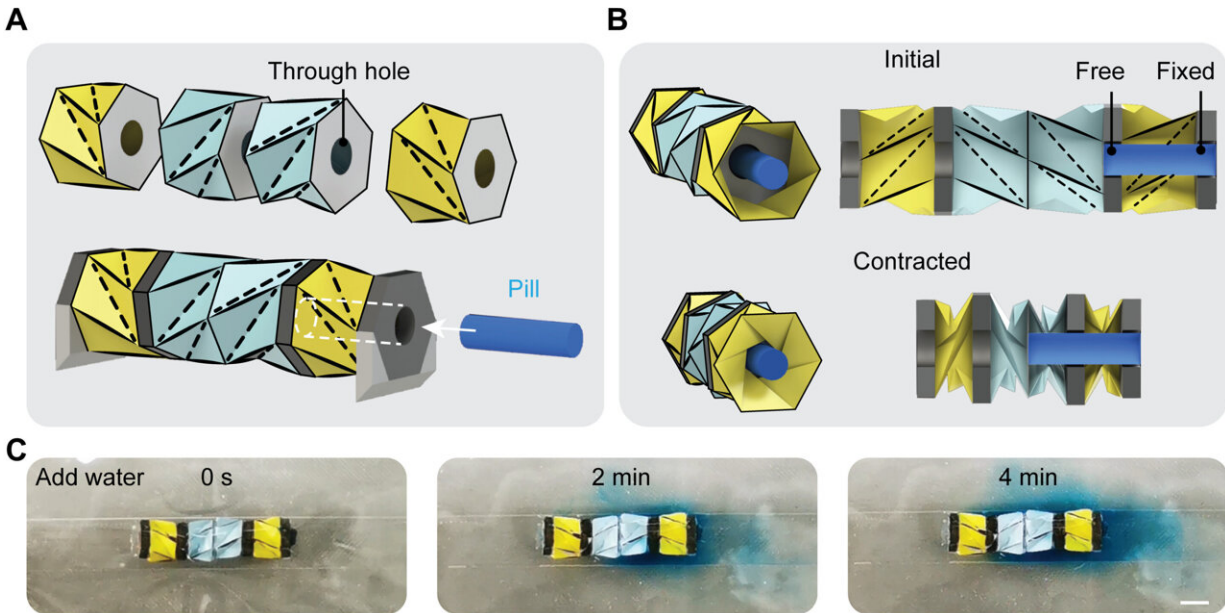


. Conceptual scheme for drug storage and release using the Kresling crawler. (A) Exploded view and assembly of the modified Kresling crawler with a through hole. The internal cavity of the front Kresling unit is used for pill storage. (B) Pill positions at initial and contracted states of the Kresling crawler. The crawler contracts without interfering with the cylindrical pill. (C) Pill gradually dissolves in water as indicated by the intensity of the blue dye for 4 min. Scale bar, 5 mm. Credit: Science Advances (2022). DOI: 10.1126/sciadv.abm7834

Soft Robotic Origami Crawler

Qiji Ze, Shuai Wu, Jun Nishikawa, Jize Dai, Yue Sun, Sophie Leanza, Cole Zemelka, Larissa S. Novelino, Glaucio H. Paulino, Ruike Renee Zhao

Stanford University
Princeton University



Contraction mechanism of the Kresling crawler

Contraction mechanism of the Kresling crawler. Credit: Science Advances (2022). DOI: 10.1126/sciadv.abm7834

Outlook: From the lab bench to the clinic

In this way, Qiji Ze and colleagues formed a magnetically actuated small-scale crawler for effective, in-plane crawling motion across limited spaces. The researchers showed the mechanism of action of the soft robotic origami crawlers by using magnetic actuation. They steered the micro-robots to effectively overcome large resistances typically encountered in severely confined spaces in vivo. Ze et al highlighted the drug storage and release potential of the crawler based on the inherent internal cavity of the Kresling unit. The team envision the translational potential of the device, to ultimately manufacture autonomous biomedical robots for future diagnostics and treatment by integrating sense, vision, and drug storage into the Kresling origami internal cavity.

More information: Qiji Ze et al, Soft robotic origami crawler, *Science Advances* (2022). [DOI: 10.1126/sciadv.abm7834](https://doi.org/10.1126/sciadv.abm7834)

Evgueni T. Filipov et al, Origami tubes assembled into stiff, yet reconfigurable structures and metamaterials, *Proceedings of the National Academy of Sciences* (2015). [DOI: 10.1073/pnas.1509465112](https://doi.org/10.1073/pnas.1509465112)

© 2022 Science X Network

Citation: Soft robotic origami crawlers (2022, April 13) retrieved 19 April 2024 from <https://techxplore.com/news/2022-04-soft-robotic-origami-crawlers.html>

<p>This document is subject to copyright. Apart from any fair dealing for the purpose of private study or research, no part may be reproduced without the written permission. The content is provided for information purposes only.</p>
--