


Textile filter testing shows promise for carbon capture

June 3 2022, by Laura Oleniacz

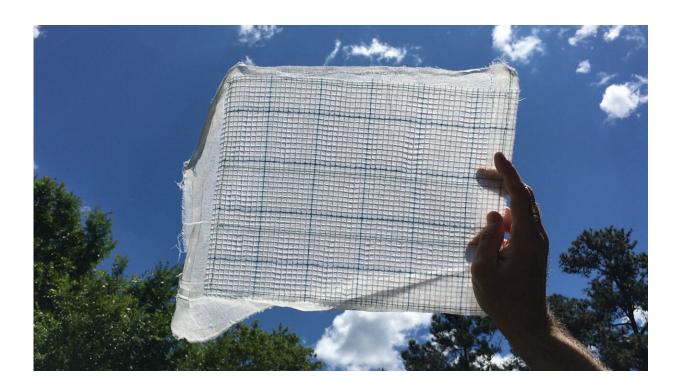

A new design for a filter could help remove carbon dioxide from flue gas emissions and air. Credit: Sonja Salmon.

North Carolina State University researchers found they could filter carbon dioxide from air and gas mixtures at promising rates using a proposed new textile-based filter that combines cotton fabric and an enzyme called carbonic anhydrase—one of nature's tools for speeding chemical reactions.



The findings from initial laboratory testing represent a step forward in the development of a possible new carbon capture technology that could reduce <u>carbon dioxide emissions</u> from biomass, coal or natural gas power plants. And while the filter would need to be scaled up in size significantly, the researchers think their design would make that step easier compared with other proposed solutions.

"With this technology, we want to stop carbon dioxide emissions at the source, and power plants are the main source of carbon dioxide emissions right now," said the study's lead author Jialong Shen, postdoctoral research scholar at NC State. "We think the main advantage of our method compared to similarly targeted research is that our method could be easily scaled up using traditional textile manufacturing facilities."

The centerpiece of the research team's design for a proposed textilebased chemical filter is the naturally occurring <u>enzyme carbonic</u> <u>anhydrase</u>, which can speed a reaction in which carbon dioxide and water will turn into bicarbonate, a compound in baking soda. The enzyme plays an important role in the human body; it helps transport carbon dioxide so it can be exhaled.

"We borrowed this wonderful enzyme in our process to speed up the carbon dioxide uptake in an <u>aqueous solution</u>," Shen said.

To create the filter, researchers attached the enzyme to a two-layer <u>cotton fabric</u> by dunking the fabric in a solution containing a material called chitosan, which acts like a glue. The chitosan physically traps the enzyme, causing it to stick to the fabric.

The researchers then ran a series of experiments to see how well their filter would separate carbon dioxide from an air mixture of carbon dioxide and nitrogen, simulating levels emitted by power plants. They



rolled the fabric into a spiral so that it can be shoved into a tube. They pushed the gas through the tube, along with a water-based solution. As the carbon dioxide reacted with the water in the solution and the enzyme, it turned into bicarbonate and dripped down the filter and the tube. Then, they captured the bicarbonate solution and routed it out.

When they pushed air through the filter at a rate of 4 liters per minute, they could pull out 52.3% of carbon dioxide with a single-stacked filter, and 81.7% with a double-stacked filter. While the findings are promising, they need to test the filter against the faster air flow rates that are used in commercial power plants. For comparison, a full-scale operation would need to process more than 10 million liters of flue gas per minute. The researchers are working with collaborators to test at a bigger scale and to compare their technology to other comparable technologies under study.

"It's a story still in progress, but we got some really exciting initial results," said study co-author Sonja Salmon, associate professor of textile engineering, chemistry and science at NC State. "We've made very significant progress."

In addition to testing the filters' carbon capture rates, they also tested how well the filter would work after five cycles of washing, drying and storing. They found it could maintain a high level of performance.

"The enzyme can be maintained at a <u>lower temperature</u> for a very long time and it's going to be durable," Shen said. "The fabric provides physical support and structure for it, while providing a large surface area for it to react with the carbon dioxide."

Capturing the carbon dioxide is just one part of the process—they also are working on the problem of how to recycle the liquid after it exits the filter, as well as the process of turning the bicarbonate back into carbon



dioxide so it can be stored and disposed of, or used for other commercial purposes.

"We want to regenerate the water solution we use with the filter so we can use it over and over," Salmon said. "That side of the process needs more work, to make the regeneration energy of the solvent as low as possible."

The researchers say new technologies for carbon capture are needed that would require less energy than existing commercialized carbon capture technologies, some of which are used only to filter carbon dioxide and release it back into the atmosphere. They hope their <u>carbon capture</u> system could help drive down the cost to help boost adoption.

"There are a lot of different ways to capture carbon dioxide," Shen said. "The current standard in the commercial setting uses a reaction that is so fast, so robust, and that binds the carbon dioxide so well, that you can't easily get the <u>carbon dioxide</u> out. You have to use very high temperatures, which means a lot of energy consumption. That makes your process more expensive."

The study, "Carbonic Anhydrase Immobilized on Textile Structured Packing Using Chitosan Entrapment for CO₂ Capture" was published online in *ACS Sustainable Chemistry & Engineering*.

More information: Jialong Shen et al, Carbonic Anhydrase Immobilized on Textile Structured Packing Using Chitosan Entrapment for CO2 Capture, *ACS Sustainable Chemistry & Engineering* (2022). DOI: 10.1021/acssuschemeng.2c02545

Provided by North Carolina State University



Citation: Textile filter testing shows promise for carbon capture (2022, June 3) retrieved 26 April 2024 from <u>https://techxplore.com/news/2022-06-textile-filter-carbon-capture.html</u>

This document is subject to copyright. Apart from any fair dealing for the purpose of private study or research, no part may be reproduced without the written permission. The content is provided for information purposes only.