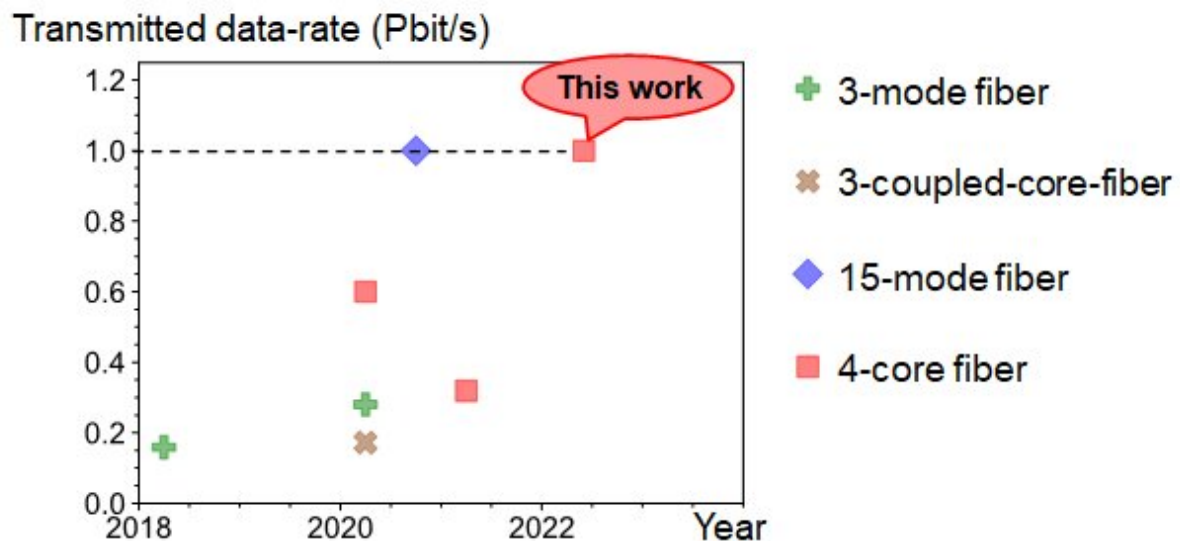


World's first successful transmission of 1 petabit per second in a standard cladding diameter multi-core fiber

June 1 2022



Recent high data-rate demonstrations in 0.125 mm diameter optical fibers – Here 1 Pb/s achieved with only 4 spatial channels compared to previous 15-mode fiber. Credit: National Institute of Information and Communications Technology (NICT)






Researchers from the Network Research Institute at the National Institute of Information and Communications Technology (NICT) report

the world's first demonstration of more than 1 petabit per second in a multi-core fiber (MCF) with a standard diameter of 0.125 mm.

The researchers, led by Benjamin J. Puttnam, constructed a transmission system that supports a record optical bandwidth exceeding 20 THz by exploiting wavelength division multiplexing (WDM) technology. It incorporates the commercially adopted optical fiber transmission windows known as C and L-bands and extends the transmission bandwidth to include also the recently explored S-band. Two kinds of doped fiber amplifiers, along with Raman amplification with pumps added in a novel multi-core pump combiner, enabled transmission of 801 wavelength channels over the 20 THz optical bandwidth.

The large number of wavelength channels were transmitted in each core of a 4-core MCF that is notable for having the same cladding diameter as a standard optical fiber. Such fibers are compatible with current cabling technologies and do not require the complex signal processing needed for unscrambling signals in multi-mode fibers, meaning conventional transceiver hardware may be used. 4-core MCFs are thought to be the most likely of the new advanced optical fibers for early commercial adoption. This demonstration shows their information carrying potential and is a significant step toward the realization of backbone communication systems that supports the evolution of Beyond 5G information services.

The results of this experiment were accepted as a post-deadline paper presentation at the International Conference on Laser and Electro-Optics (CLEO) 2022 and presented on Thursday, May 19, 2022.

Transmission demonstrations in 0.125 mm fibers					This work
	High-data-rate March 2020	Long-distance March 2020	High-data-rate December 2020	Long-distance June 2021	High-data-rate May 2022
Data-rate	0.61 Pb/s	0.172 Pb/s	1.01 Pb/s	0.319 Pb/s	1.02 Pb/s
Number of cores	4	3	1	4	4
Number of modes/core	1	1	15	1	1
MIMO required?	No	Yes	Yes	No	No
Wavelength bands	S + C + L	C + L	C + L	S + C + L	S + C + L
Transmission bandwidth	14 THz	10 THz	10 THz	13.8 THz	20 THz
Transmission distance	54	2,040	23	3,001	51.7
Data-rate/spatial channel	152.5 Tb/s	57.3 Tb/s	67.3 Tb/s	79.8 Tb/s	255 Tb/s
Fiber cross-section					

Comparison table of standard diameter fiber transmission demonstrations performed at NICT. Credit: National Institute of Information and Communications Technology (NICT)

Demand for enhanced data transmission capacity has inspired both investigation of new spectral transmission windows and advanced optical fibers exploiting parallelization in the spatial domain. In recent years, advanced fibers with the same cladding diameter as standard single-mode optical fibers but able to support multiple propagation paths have been proposed. These fibers can multiply the transmission capacity but are still compatible with existing [manufacturing processes](#) and have emerged as a likely candidate for near-term commercial adoption of these transformative [communications technology](#).

NICT has achieved various world records by constructing various transmission systems using new optical fibers and in December 2020 succeeded in the first 1 petabit per second transmission demonstration in a standard diameter fiber using a 15-mode optical fiber. However, such fibers require complex MIMO (Multiple-input-multiple-output) digital signal processing to unscramble the signals, which are mixed during transmission, and practical deployment is expected to require large-scale

development of dedicated integrated circuits.

NICT constructed the transmission system using 4-core MCF with standard 0.125 mm cladding diameter, WDM technology and mixed optical amplification systems. The system allowed transmission of 1.02 petabit per second over 51.7 km. Previously, 610 terabit per second was achieved in a similar fiber but only using part of the S-band.

	Transmission capacity (bits/second)	Number of wavelengths				Frequency band (Total)	Modulation system
		S-band	C-band	L-band	Total		
March 2020	0.61 Peta	161	192	208	561	14 THz	S-band: 64QAM C, L-band: 256QAM
This work	1.02 Peta	335	200	266	801	20 THz	256QAM

Table comparing recent 4-core fiber transmission demonstrations. Credit: National Institute of Information and Communications Technology (NICT)

In this experiment, by broadening the Raman amplification bandwidth to the full S-band and using customized thulium-doped fiber amplifiers (TDFAs) for S-band and extended L-band erbium-doped fiber amplifiers (EDFAs), researchers were able to use a record 20 THz optical spectrum with total of 801 x 25 GHz spaced wavelength channels, each with dual-polarization-256 QAM modulation for high spectral density in all wavelength bands.

The 4-core MCF with standard cladding diameter is attractive for early adoption of new space-division multiplexing (SDM) fibers in high-throughput and long-distance links since it is compatible with conventional cable infrastructure and expected to have mechanical reliability comparable to standard single-mode fibers. Beyond 5G, an

explosive increase of data traffic from new information and communication services is expected and it is therefore crucial to demonstrate how new fibers can meet this demand. It is hoped that this result will help the realization of new communication systems able to support new bandwidth-hungry services.

NICT will continue to promote research and development of advanced optical fibers for both near and long-term applications, seeking continuous improvement in optical communication systems for the benefit of society. We will further develop wide-band transmission systems and explore technologies for additional increases of transmission capacity of low-core-count multi-core fibers and other novel fibers. NICT will also aim to extend the [transmission](#) range of ultra-high-capacity systems.

The paper containing these results was presented at the International Conference on Laser and Electro-Optics (CLEO) 2022.

Provided by National Institute of Information and Communications Technology (NICT)

Citation: World's first successful transmission of 1 petabit per second in a standard cladding diameter multi-core fiber (2022, June 1) retrieved 9 April 2024 from <https://techxplore.com/news/2022-06-world-successful-transmission-petabit-standard.html>

<p>This document is subject to copyright. Apart from any fair dealing for the purpose of private study or research, no part may be reproduced without the written permission. The content is provided for information purposes only.</p>
--