Researchers propose a novel fault diagnosis algorithm for pulse width modulation converter

August 24 2022, by Zhang Nannan

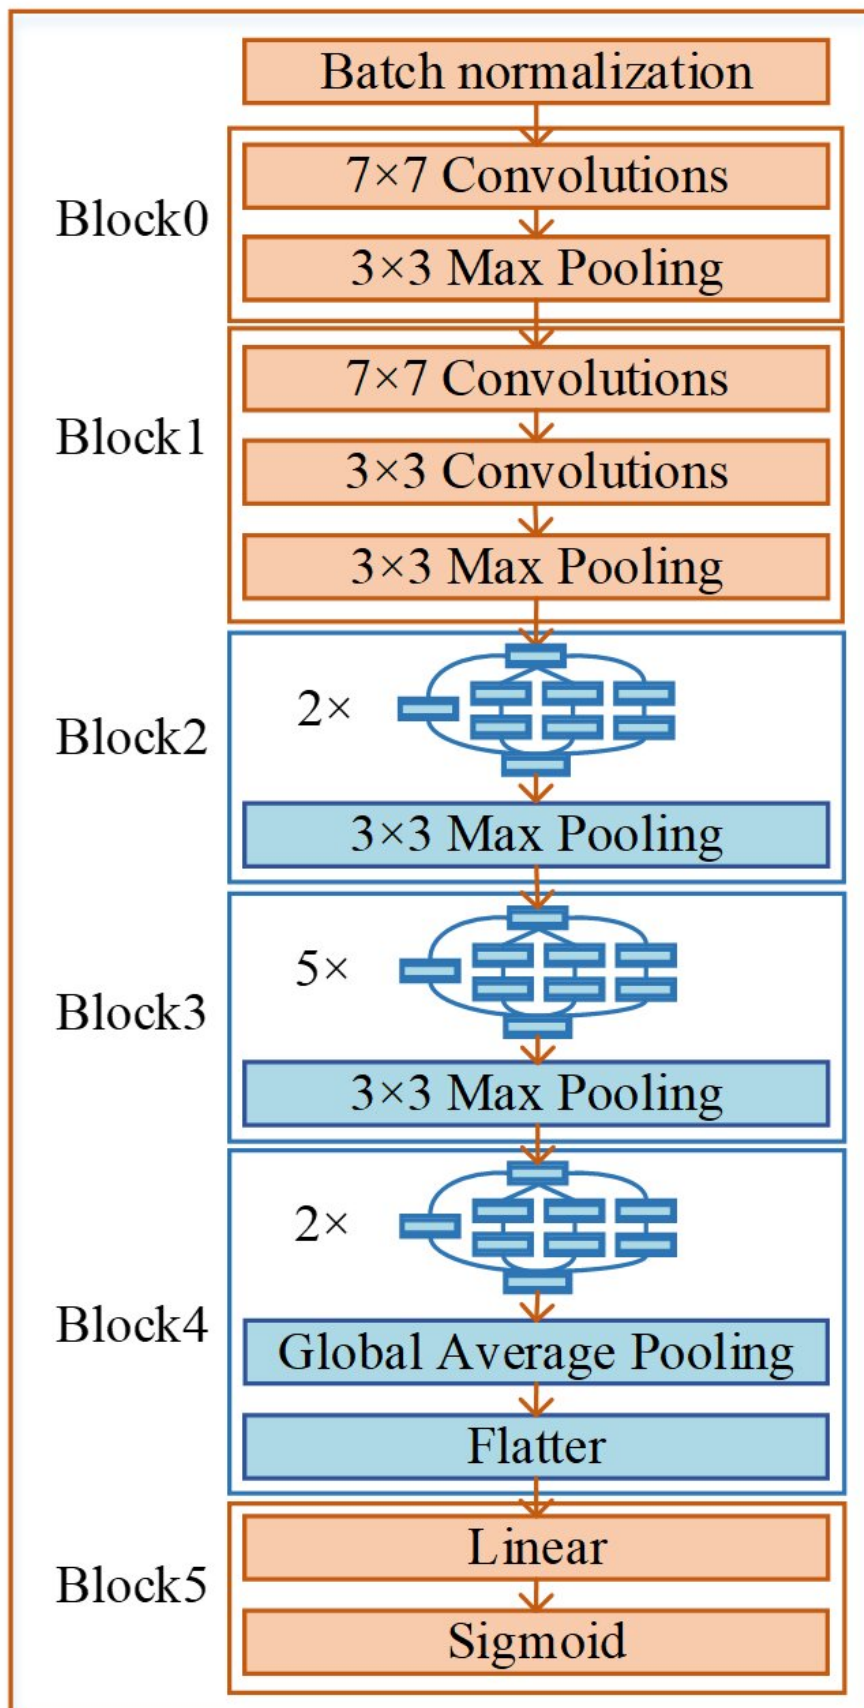|	Batch normalization
Block0	7×7 Convolutions
	3×3 Max Pooling
Block1	7×7 Convolutions
	3×3 Convolutions
	3×3 Max Pooling

Block2 2×

Block2 3×3 Max Pooling

Block3 5×

Block3 3×3 Max Pooling

Block4 2×

Block4 Global Average Pooling

Flatter

Block5 Linear

Sigmoid

Fig. 1. The architecture of the proposed model. Credit: Zhang Li

A research team led by Prof. Gao Ge and Jiang Li from the Hefei Institutes of Physical Science of the Chinese Academy of Sciences has investigated the fault diagnosis of a pulse width modulation converter and proposed a neural network fault diagnosis algorithm to solve existing problems in this field. Results were published in *IEEE Transactions on Power Electronics*.

Pulse width modulation has the advantages of high efficiency, high power density and high reliability. But due to the complexity of the drive systems and the diversity of fusion joint operation, pulse-width modulating voltage source converter systems are prone to suffer critical failures. Therefore, research on fault diagnostic technology is of deep concern, especially open-circuit fault diagnosis, which was what scientists have been focusing in this study.

Current fault diagnosis methods only deal with the rectification state or inverter state. Theoretical analysis shows that the fault characteristic quantities in both two states have completely different characteristics and complicated, which increases the difficulty of fault diagnosis.

In this study, when applying the proposed algorithm, the researchers used only the three-phase grid side current as the characteristic quantity of fault diagnosis, and diagnosed 21 types of faults in both rectification and inverter state.

"Different from the traditional Convolutional Neural Network architecture, a carefully crafted design can increase the depth and width

of the network while keeping the computing budget constant," said Dr. Deng Xi, first author of the study. "This can make better use of the computing resources inside the network."
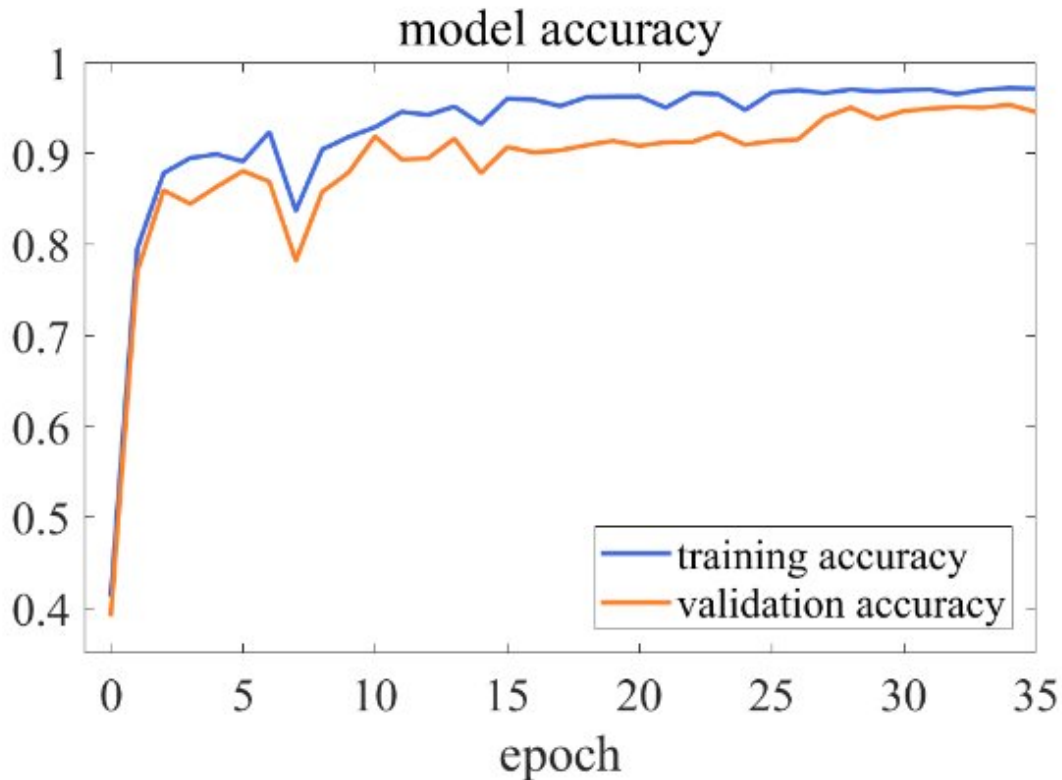

Fig. 2. Model accuracy of the neural network model. Credit: Zhang Li

The experimental results show that the model can accurately detect approximately 99.14% of open-circuit switch faults within 12.83 ms (