


New highly efficient lead-bin binary perovskite photodetectors with fast response times

August 29 2022, by Ingrid Fadelli

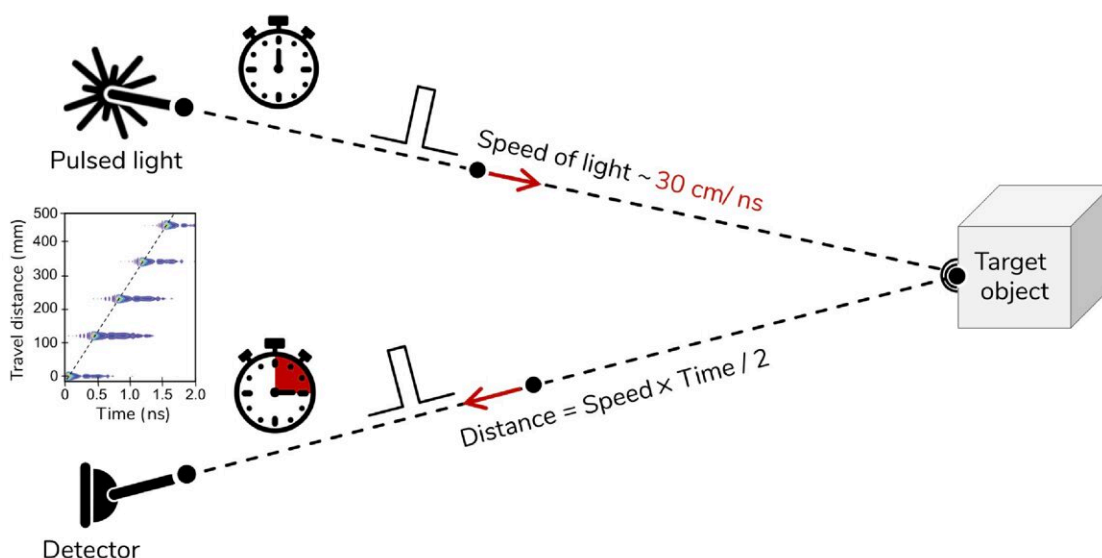

LiDAR demo setup at University of Toronto. Femtosecond pulsed light travels to the moving mirror and then is directed and focused onto the PbSn perovskite photodetector. Credit: Najarian et al.


Researchers at the University of Toronto and the Barcelona Institute of Science and Technology have recently created new solution-processed perovskite photodetectors that exhibit remarkable efficiencies and

response times. These photodetectors, introduced in a paper published in *Nature Electronics*, have a unique design that prevents the formation of defects between its different layers.

"There is growing interest in 3D range imaging for autonomous driving and consumer electronics," Edward H. Sargent told TechXplore. "We have worked as a team for years on finding new materials that enable light sensing technologies such as next-generation image sensors and striving to take these in a direction that could have a commercial and societal impact."

Photodetectors, sensing devices that detect or respond to light, can have numerous highly valuable applications. For instance, they can be integrated in robotic systems, autonomous vehicles, [consumer electronics](#), environmental sensing technology, fiber optic communication systems and security systems.

"In these applications, fast photodetection is required in wavelength ranges beyond human vision," Amin Morteza Najarian said. "Silicon, the legacy approach—and ideal for electronic readout—does not on its own unite [high efficiency](#) with high-speed, as a result of its indirect bandgap, a property of silicon's band structure that produces weak absorption (hence a need for thick silicon) in the [near infrared](#)."

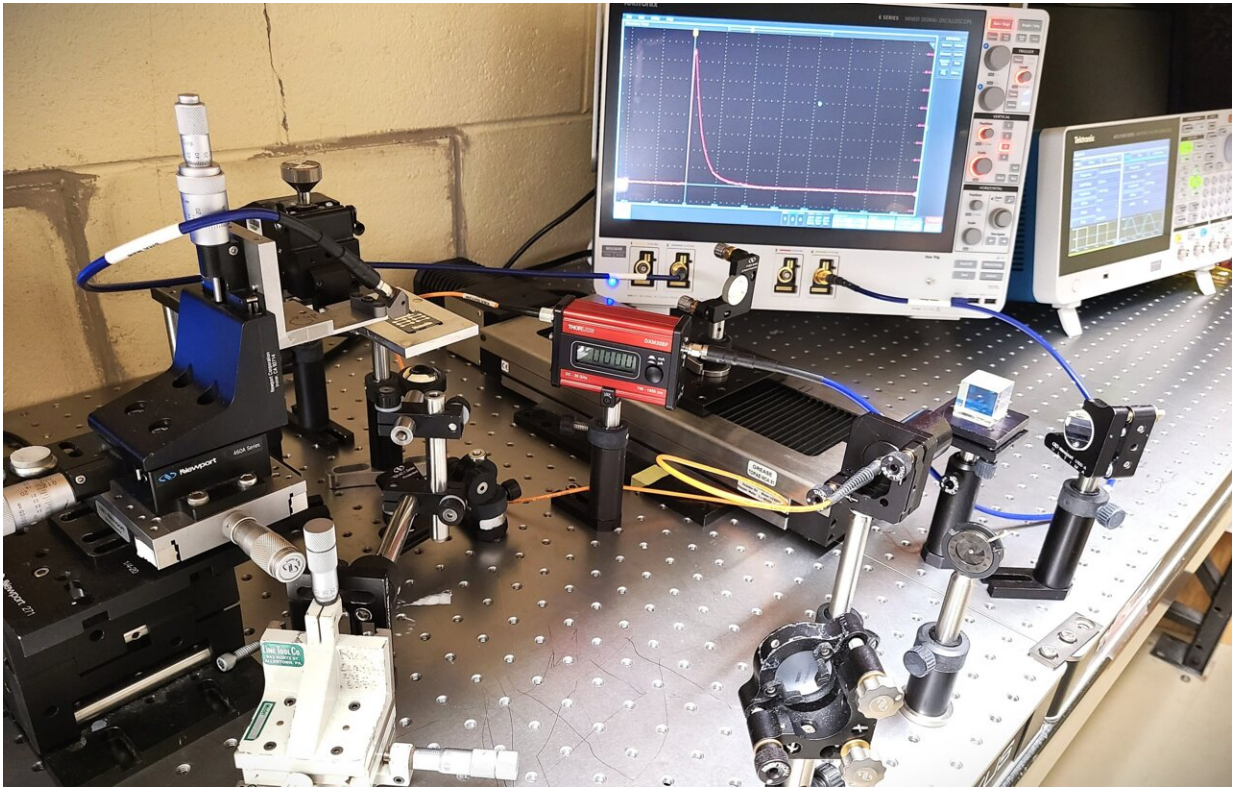

Working principle of Light Detection and Ranging: LiDAR measures the time it takes light to travel to an object and scatter back into the detector. It is the speed of light that is used to translate the temporal information into the spatial information. Credit: Najarian et al.

In a series of initial computational studies, Sargent and his team identified a binary perovskite with a high-carrier mobility and a high absorption coefficient that could compete with currently employed materials in terms of both efficiency and speed. The photodetector introduced in their recent paper is based on this newly identified, active material.

"When light is absorbed by the perovskite active layer, the photogenerated electrons and holes are extracted through electron and

hole transport layers," said coauthor Maral Vafaie. "To achieve fast response times, these [charge carriers](#) must move rapidly across the devices, including the transport layers. Nickel oxide (NiO_x) is characterized by high crystallinity and mobility, making it an ideal option for hole transport layer (HTL)."

When they first started testing their devices, the researchers found that there was a chemical incompatibility between the established anti-oxidation strategy for PbSn perovskites and the NiO_x layer. They thus devised a method to remove oxygen from the device, converting unwanted tin species and ensuring that no harmful residues are left behind.

In initial evaluations, the photodetectors created by Sargent, Najarian, Vafaie and their colleagues achieved very promising results, both in terms of quantum efficiencies and [response times](#). The team also showed that their devices can resolve sub-millimeter distances with a typical 50 μm standard deviation.



U of T student and postdoc (Maral and Amin) fabricating PbSn perovskites for LiDAR. Credit: Najarian et al.

"We demonstrated that photodetectors fabricated using binary perovskites convert near [infrared light](#) into [electrical signal](#) with efficiency better than 85% with a response time faster than a fraction of nanosecond," Sargent and Morteza Najarian said. "This is a 100 times improvement compared to previously reported solution-processed photodetectors. We showcase these performance metrics in spatially resolving sub millimeter distances, i.e., providing depth resolution."

In the future, the new solution-processed perovskite photodetectors created by Sargent, Morteza Najarian and their colleagues could prove valuable for creating LiDAR technology (i.e., tools for determining variable distances between objects) and sensors for autonomous vehicles

or robots. Meanwhile, the researchers plan to continue searching for advantageous materials and designing new components for sensing technologies.

"In long-range light detection and ranging (LiDAR) applications, only a small fraction of the scattered light from the objects reaches the [photodetector](#)," Sargent and Morteza Najarian added. "If one shifts illumination, and sensing, to the short-wave infrared region (e.g., 1550 nm), a [higher power](#) of illuminating light becomes possible without posing eye safety issues. We are working on the next-generation III-V semiconductors with this in mind."

More information: Amin Morteza Najarian et al, Sub-millimetre light detection and ranging using perovskites, *Nature Electronics* (2022). [DOI: 10.1038/s41928-022-00799-7](https://doi.org/10.1038/s41928-022-00799-7)

© 2022 Science X Network

Citation: New highly efficient lead-bin binary perovskite photodetectors with fast response times (2022, August 29) retrieved 7 May 2024 from <https://techxplore.com/news/2022-08-highly-efficient-lead-bin-binary-perovskite.html>

This document is subject to copyright. Apart from any fair dealing for the purpose of private study or research, no part may be reproduced without the written permission. The content is provided for information purposes only.
