


How different shade conditions impact performance of solar cells connected in series

September 27 2022

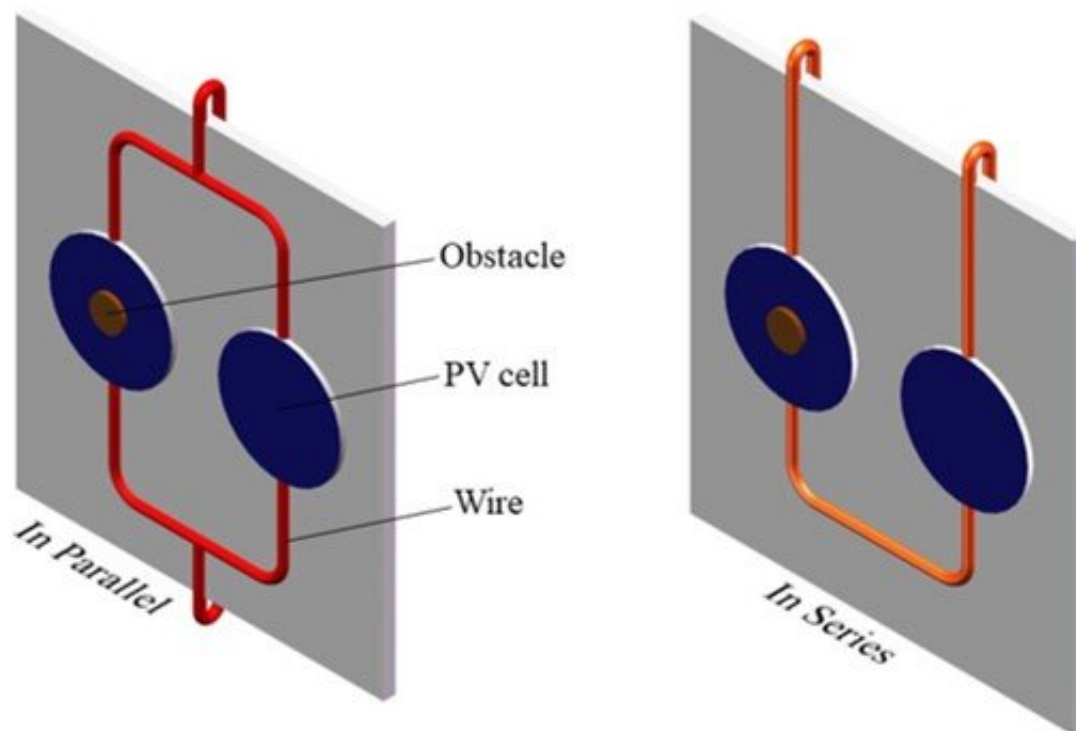

Two solar cells connected in parallel (left) and in series (right) with an obstacle creating shade (brown). Shady conditions caused more power loss in series systems. Credit: Guo et al.

Large obstacles, like clouds and buildings, can block sunlight from reaching solar cells, but smaller sources, such as dust and leaves, can also create similar problems. Understanding how the loss of incoming radiation affects power output is essential for optimizing photovoltaic

technology, which converts light into electricity and is an important contributor to the green energy transition.

In the *Journal of Renewable and Sustainable Energy*, researchers from Shanghai Polytechnic University, Shanghai Engineering Research Center of Advanced Thermal Functional Materials, and Shanghai Solar Energy Research Center Co. Ltd explored how different shade conditions impact performance of single [solar cells](#) and two-cell systems connected in series and parallel.

"In the real world, [photovoltaic cells](#) are sometimes shaded by obstacles, which significantly alters the amount of incoming light," said author Huaqing Xie, of Shanghai Polytechnic University and Shanghai Engineering Research Center of Advanced Thermal Functional Materials. "The degradation effects make power optimization difficult and result in significant power loss."

Photovoltaics connected in series create a single path with the electrons flowing from one cell into the next. In contrast, cells in parallel provide two lanes for electrons to travel through, then recombine later. In practical applications, networks of solar cells are connected in series and parallel to expand the output current and power capability.

The team found that the decrease in output current of a single cell or two cells connected in parallel was nearly identical to the ratio of shade to sunlight. However, for two cells running in series, there was excess power loss and a rise in temperature, which can cause further output degradation. For example, with 29.6% of the series photovoltaic module in the shade, the current decreased by 57.6%.

"Our study indicates that many factors, including shadow area, shadows on different cells of the module, and the connection of cells and modules, may affect the performance," said Xie.

Previous studies have explored the consequences of shade on large photovoltaic modules but have largely ignored single cells and simple systems.

"In these complicated systems, shadows on one single cell may play vital role on the system output and reliability," said Xie. "Therefore, studying [single cells](#) or a simple arrangement of two connected cells is necessary for solar panel development."

In the future, the authors hope to examine the microscopic interaction behaviors and mechanisms in photovoltaic cells subjected to different shadows.

The article, "Experimental study on the power losses of a single [photovoltaic](#) cells and two series and parallel connected cells with partial shadows," is authored by Xiaoxue Guo, Jiapu Zou, Zihua Wu, Yuanyuan Wang, and Huaqing Xie. The article will appear in *Journal of Renewable and Sustainable Energy* on Sept. 27, 2022.

More information: Xiaoxue Guo et al, Experimental Study on the Power Losses of a Single Photovoltaic Cells and Two Series and Parallel Connected Cells with Partial Shadows, *Journal of Renewable and Sustainable Energy* (2022). [DOI: 10.1063/5.0106977](https://doi.org/10.1063/5.0106977)

Provided by American Institute of Physics

Citation: How different shade conditions impact performance of solar cells connected in series (2022, September 27) retrieved 28 April 2024 from <https://techxplore.com/news/2022-09-conditions-impact-solar-cells-series.html>

This document is subject to copyright. Apart from any fair dealing for the purpose of private

study or research, no part may be reproduced without the written permission. The content is provided for information purposes only.