


Magnetic field helps thick battery electrodes tackle electric vehicle challenges

September 26 2022

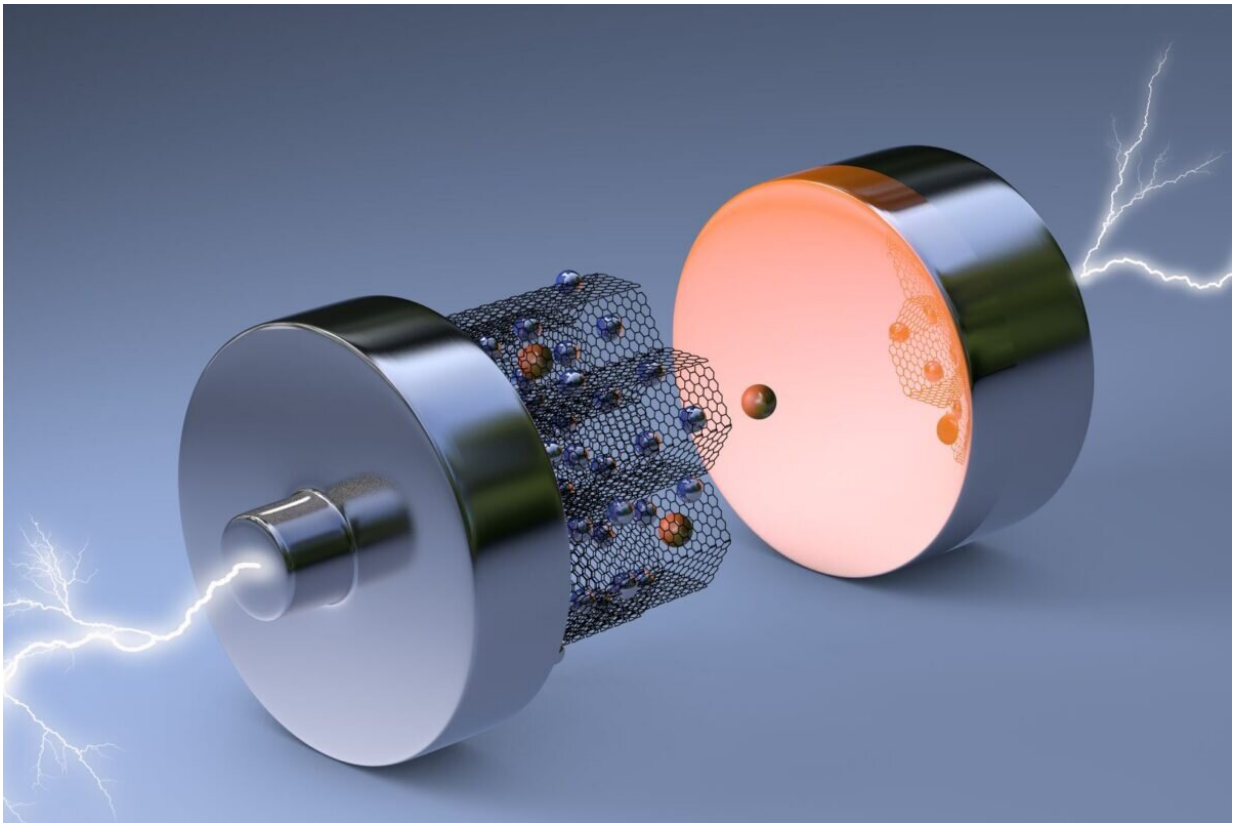

Credit: University of Texas at Austin

As electric vehicles grow in popularity, the spotlight shines more brightly on some of their remaining major issues. Researchers at The University of Texas at Austin are tackling two of the bigger challenges facing

electric vehicles: limited range and slow recharging.

The researchers fabricated a new type of electrode for [lithium-ion batteries](#) that could unleash greater power and faster charging. They did this by creating thicker electrodes—the positively and negatively charged parts of the battery that deliver power to a device—using magnets to create a unique alignment that sidesteps common problems associated with sizing up these critical components.

The result is an electrode that could potentially facilitate twice the range on a single charge for an electric vehicle, compared with a battery using an existing commercial electrode.

"Two-dimensional materials are commonly believed as a promising candidate for high-rate energy storage applications because it only needs to be several nanometers thick for rapid charge transport," said Guihua Yu, a professor in UT Austin's Walker Department of Mechanical Engineering and Texas Materials Institute. "However, for thick-electrode-design-based next-generation, high-energy batteries, the restacking of nanosheets as building blocks can cause significant bottlenecks in charge transport, leading to difficulty in achieving both high energy and fast charging."

The key to the discovery, published in the *Proceedings of the National Academy of Sciences*, uses thin [two-dimensional materials](#) as the [building blocks](#) of the electrode, stacking them to create thickness and then using a magnetic field to manipulate their orientations. The research team used commercially available magnets during the fabrication process to arrange the two-dimensional materials in a vertical alignment, creating a fast lane for ions to travel through the electrode.

Typically, thicker electrodes force the ions to travel longer distances to move through the battery, which leads to slower charging time. The

typical horizontal alignment of the layers of material that make up the electrode force the ions to snake back and forth.

"Our electrode shows superior electrochemical performance partially due to the high mechanical strength, [high electrical conductivity](#), and facilitated lithium-ion transport thanks to the unique architecture we designed," said Zhengyu Ju, a graduate student in Yu's research group who is leading this project.

In addition to comparing their electrode with a commercial electrode, they also fabricated a horizontally arranged electrode using the same materials for experimental control purposes. They were able to recharge the vertical thick electrode to 50% [energy level](#) in 30 minutes, compared with 2 hours and 30 minutes with the horizontal electrode.

The researchers emphasized they are early in their work in this area. They looked at just a single type of battery electrode in this research.

Their goal is to generalize their methodology of vertically organized [electrode](#) layers to apply it to different types of electrodes using other materials. This could help the technique become more widely adopted in industry, so it could enable future fast-charging yet [high-energy](#) batteries that power [electric vehicles](#).

More information: Zhengyu Ju et al, Vertically assembled nanosheet networks for high-density thick battery electrodes, *Proceedings of the National Academy of Sciences* (2022). [DOI: 10.1073/pnas.2212777119](https://doi.org/10.1073/pnas.2212777119)

Provided by University of Texas at Austin

Citation: Magnetic field helps thick battery electrodes tackle electric vehicle challenges (2022,

September 26) retrieved 19 April 2024 from <https://techxplore.com/news/2022-09-magnetic-field-thick-battery-electrodes.html>

This document is subject to copyright. Apart from any fair dealing for the purpose of private study or research, no part may be reproduced without the written permission. The content is provided for information purposes only.