


# **Institute develops device to test friction, wear associated with EV fluids**

March 6 2023

---

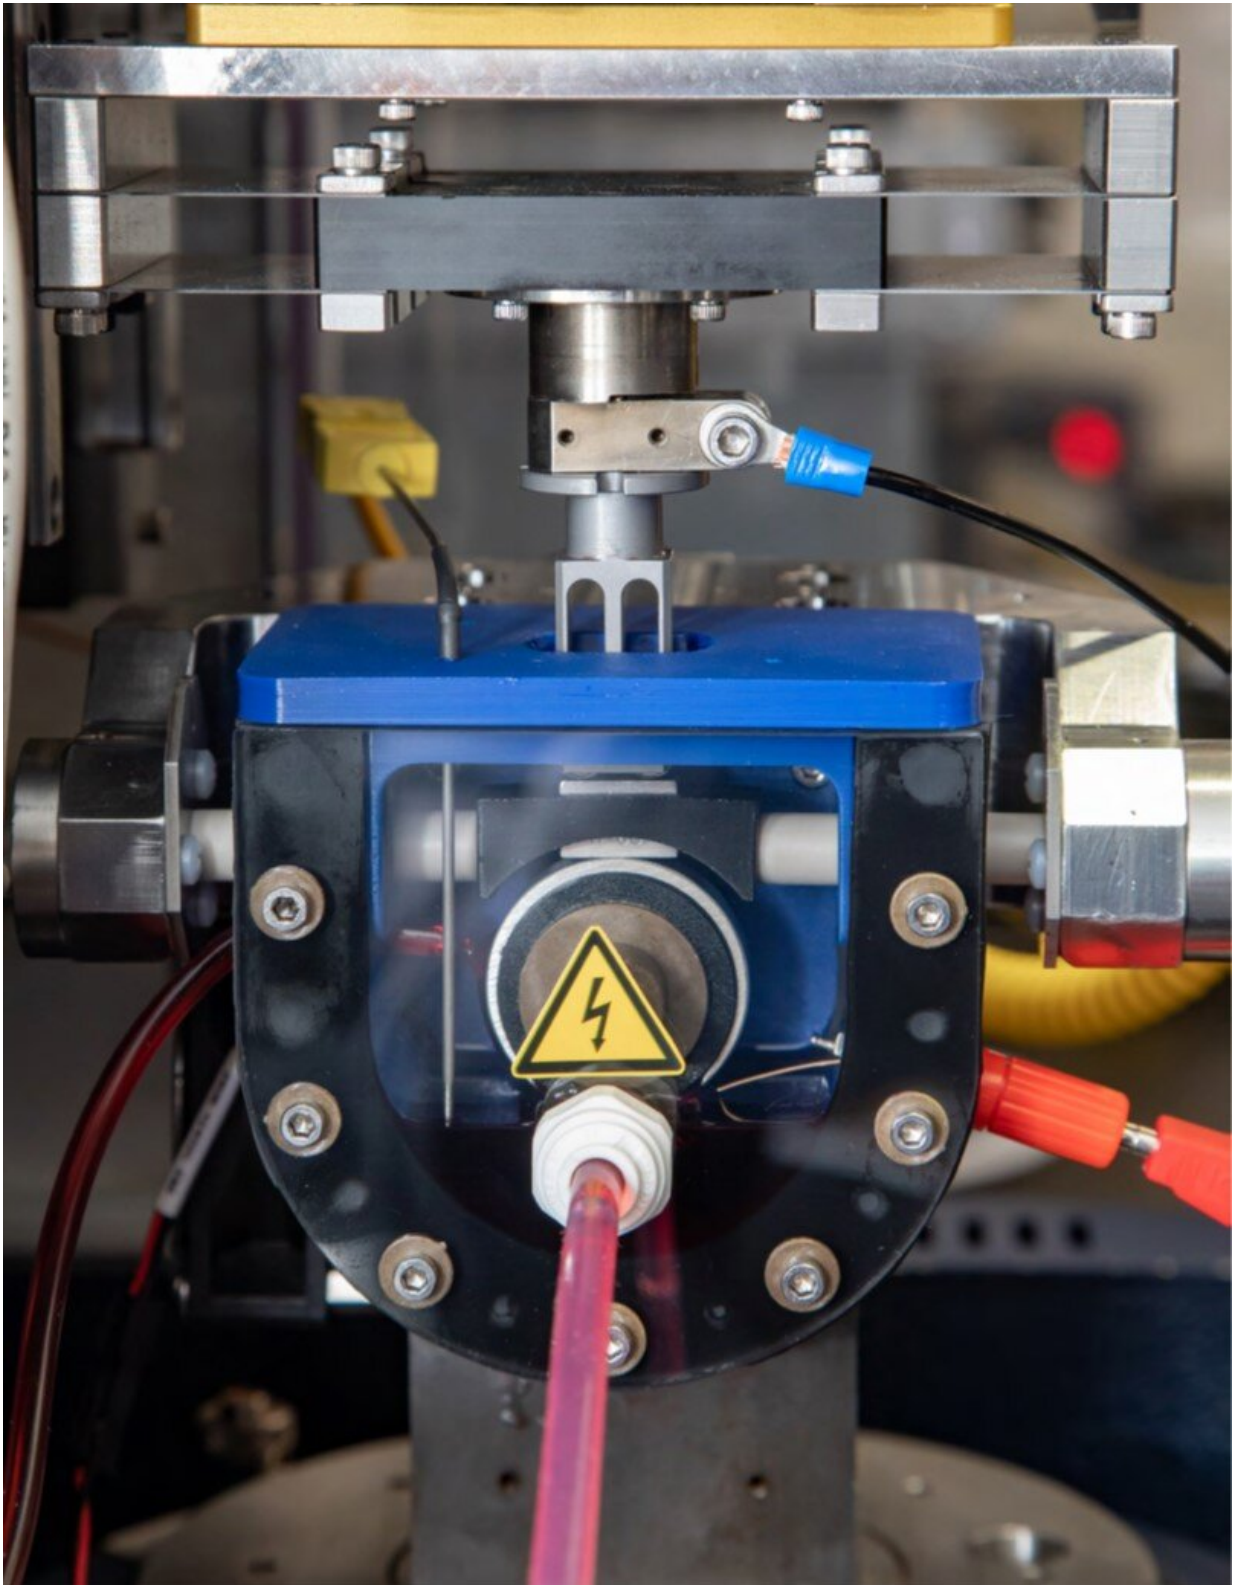

An internally funded SwRI project modified a commercial tribology testing

machine to more effectively analyze the friction and wear associated with lubricants formulated for electric vehicles. The new tool adds to SwRI's testing capabilities and allows the lubricant industry to efficiently test and optimize lubricant formulation. Credit: Southwest Research Institute

A Southwest Research Institute team has developed a mechanical testing device to analyze fluids and lubricants formulated for electric vehicles. The team modified a commercial tribology testing device to give it the capability to evaluate the impact of electric currents in fluids, measuring the wear and friction on the automobile parts in the presence of an applied voltage.

"The electrification of the automotive industry has accelerated over recent years, with future projections showing an [exponential growth](#) in [market share](#) for both light and heavy-duty applications," said Cole T. Frazier, research engineer with SwRI's Advanced Drivetrain Lubricants Section. "Traditional fluid testing tools, however, were not developed to effectively analyze [lubricant](#) properties in electrified environments. That extends to tribology testing as well."

Tribology is the study of friction, lubrication, and wear. The challenges for evaluating behavior in EVs is the presence of an applied electrical potential at component and lubricant interfaces.

To meet this challenge, Dr. Carlos Sanchez, a senior research engineer in the Tribology Research and Evaluations section at SwRI, designed a new test apparatus to model the effects of electrification on rotating parts. This small scale "bench test" was built around a traditional universal testing machine. The setup and test protocol were further developed by the team throughout the project.

The multidisciplinary team included Frazier, Sanchez, Nolan Erickson (Electrical Engineer), Dr. Peter Lee (Institute Engineer), Andrew Velasquez (Engineer) and Travis Kostan (Sr. Research Analyst).

Most EVs use alternating current (AC) induction or permanent magnet motors, which are powered by onboard battery packs. An inverter takes the [direct current](#) (DC) voltage input from the batteries and converts it to the AC power required to operate the vehicle's motor.

"The numerous rotating surfaces within EVs are exposed to voltage spikes during the DC-to-AC conversion process," said Sanchez. "The spikes and the inherent electric field in high-voltage environments can allow [electric currents](#) to flow through the surfaces, damaging the lubricants and materials that keep them moving smoothly."

According to the researchers, the speed of the DC-to-AC frequency conversion can cause local voltage spikes that require grounding. Motor bearings are often especially susceptible to electric currents flowing through them due to their location near the voltage spikes. The electric potential for the bearings can build until the voltage becomes strong enough to break down the thin film of lubricant separating the small metal ball bearings from the bearing raceways or bearing shells, which can cause surface damage and scarring.

The team developed and analyzed a test protocol for the new instrument that would best represent the actual system and produce relevant results. Using this new internally funded advancement, they tested several different commercial lubricants and measured wear scarring and friction on the bearing raceways and bearing shells. They found that [electric potential](#) across a fluid, whether the current is AC or DC, can affect wear and bearings friction by as much as 20%.

"SwRI specializes in creating custom tribology rigs and testing

capabilities to allow the industry to test multiple lubricant formulations efficiently, without requiring full-scale testing," said Lee, who leads SwRI's tribology activities. "In this case, because lubricant breakdown is shown to be fluid-dependent, formulators can optimize their lubricants for specific EV drivetrains. SwRI's bench-scale testing capabilities will accelerate lubricant optimization, improving durability and increasing vehicle range through reduced friction."

The modifications and initial results were presented at the 2022 Society of Tribology and Lubrication Engineers (STLE) annual conference, the 2022 STLE E Mobility Conference, the Tribology Gordon Conference, and the Institution of Mechanical Engineers Sustainability Conference. Full results will be presented at the STLE Annual meeting in Long Beach May 16-20, 2023.

**More information:** Conference: [www.stle.org/AnnualMeeting/Registration/Event\\_Display.aspx](http://www.stle.org/AnnualMeeting/Registration/Event_Display.aspx)

Provided by Southwest Research Institute

Citation: Institute develops device to test friction, wear associated with EV fluids (2023, March 6) retrieved 23 April 2024 from <https://techxplore.com/news/2023-03-device-friction-ev-fluids.html>

This document is subject to copyright. Apart from any fair dealing for the purpose of private study or research, no part may be reproduced without the written permission. The content is provided for information purposes only.