


# Researchers develop an additive to efficiently improve the stability of perovskite solar cells

May 4 2023

---

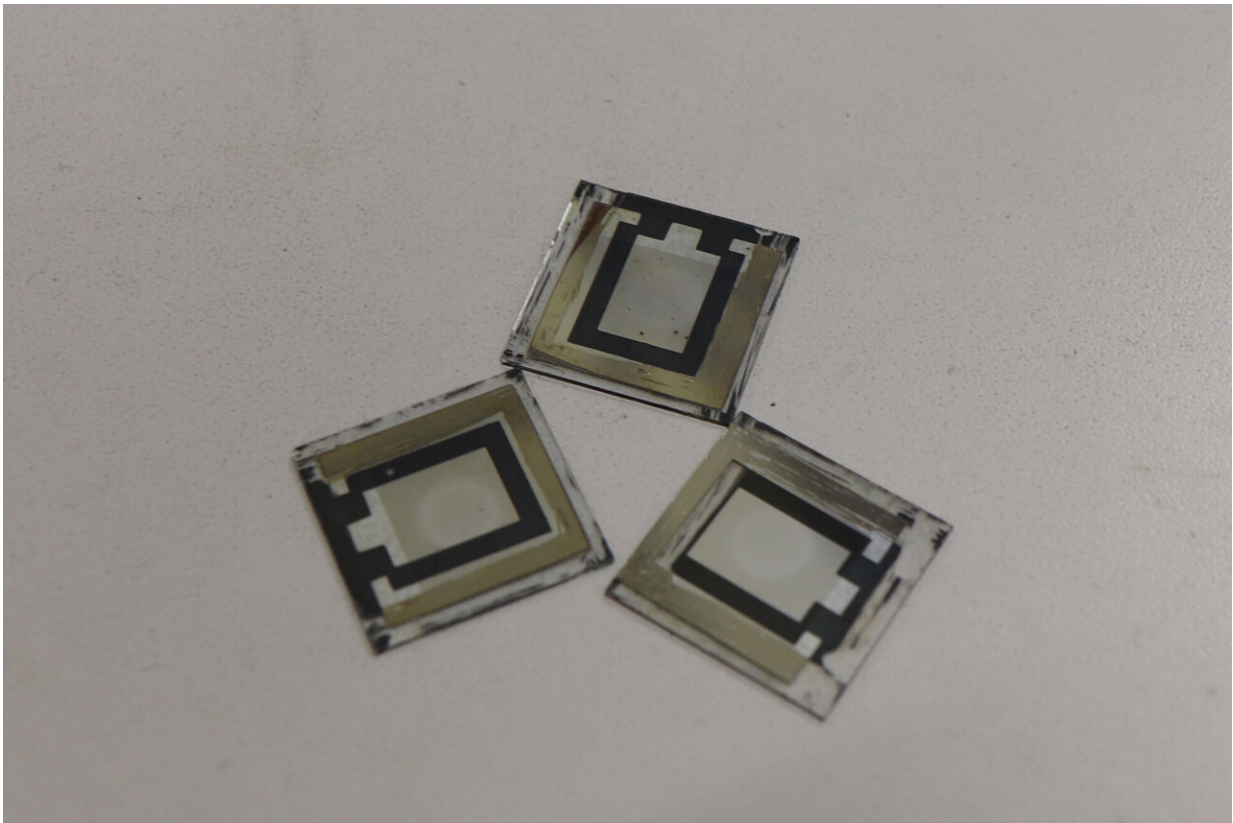

The 1 cm<sup>2</sup> perovskite solar cells with additive. Credit: City University of Hong Kong

Perovskite solar cells (PVSCs) are a promising alternative to traditional silicon-based solar cells because of their high power-conversion


efficiency and low cost. However, one of the major challenges in their development has been achieving long-term stability.

Recently, a research team from City University of Hong Kong (CityU) made a breakthrough by developing an innovative multifunctional and non-volatile additive which can improve the efficiency and stability of perovskite [solar cells](#) by modulating perovskite film growth. This simple and [effective strategy](#) has great potential for facilitating the commercialization of PVSCs.

"This type of multifunctional additive can be generally used to make different perovskite compositions for fabricating highly efficient and stable perovskite solar cells. The high-quality perovskite films will enable the upscaling of large-area [solar panels](#)," explained Professor Alex Jen Kwan-yue, Lee Shau Kee Chair Professor of Materials Science and Director of the Hong Kong Institute for Clean Energy at CityU, who led the study.

PVSCs have attracted significant attention due to their impressive solar power conversion efficiency (PCE). Since perovskites can be deposited from solutions onto the fabrication surfaces, PVSCs have the potential to be applied in building-integrated photovoltaics (BIPV), [wearable devices](#), and solar farm applications.

However, the efficiency and stability are still affected by the severe energy loss associated with defects embedded at the interfaces and grain boundaries of the perovskites. Therefore, the intrinsic quality of perovskite film plays a critical role in determining the achievable efficiency and stability of PVSCs.

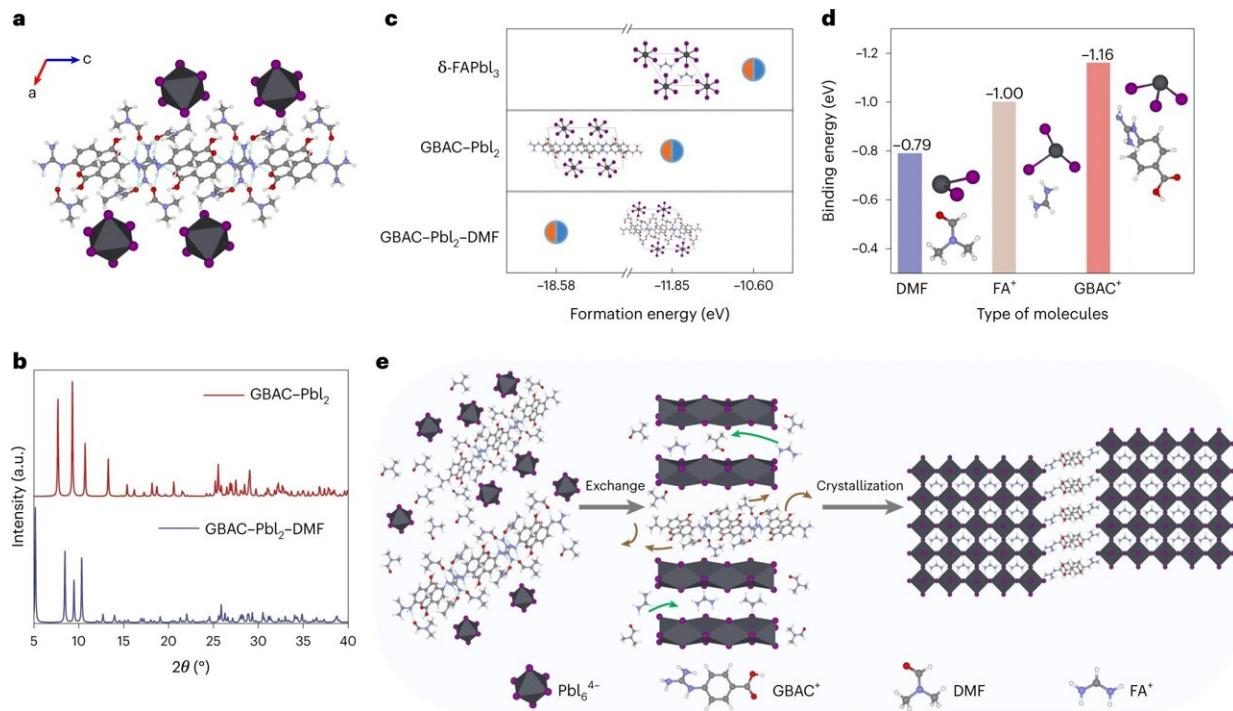

Structure analysis of intermediate phase-induced crystallization of perovskite film with the newly developed additive GBAC. Credit: © Li, F. et al., <https://www.nature.com/articles/s41566-023-01180-6>

Although many previous research studies have focused on improving the film morphology and quality with volatile additives, these additives tend to escape from the film after annealing, creating a void at the perovskite-substrate interface.


To tackle these issues, the CityU researchers developed a simple but effective strategy of modulating the perovskite film growth to enhance the film quality. They found that by adding a multifunctional molecule (4-guanidinobenzoic acid hydrochloride, (GBAC)) to the perovskite precursor, a hydrogen-bond-bridged intermediate phase is formed and modulates the crystallization to achieve high-quality perovskite films with large perovskite crystal grains and coherent grain growth from the

bottom to the surface of the film.

This molecule can also serve as an effective defect passivation linker (a method to reduce the defect density of perovskite film) in the annealed perovskite film due to its non-volatility, resulting in significantly reduced non-radiative recombination loss and improved film quality.

Their experiments showed that the defect density of perovskite films can be significantly reduced after introducing GBAC. The power conversion efficiency of inverted (p-i-n) perovskite solar cells based on the modified perovskites was boosted to 24.8% (24.5% certified by the Japan Electrical Safety & Environment Technology Laboratories), which is among the highest values reported in the literature.

Also, the overall energy loss of the device was reduced to 0.36eV, representing one of the lowest energy losses among the PVSC devices with high power conversion efficiency.

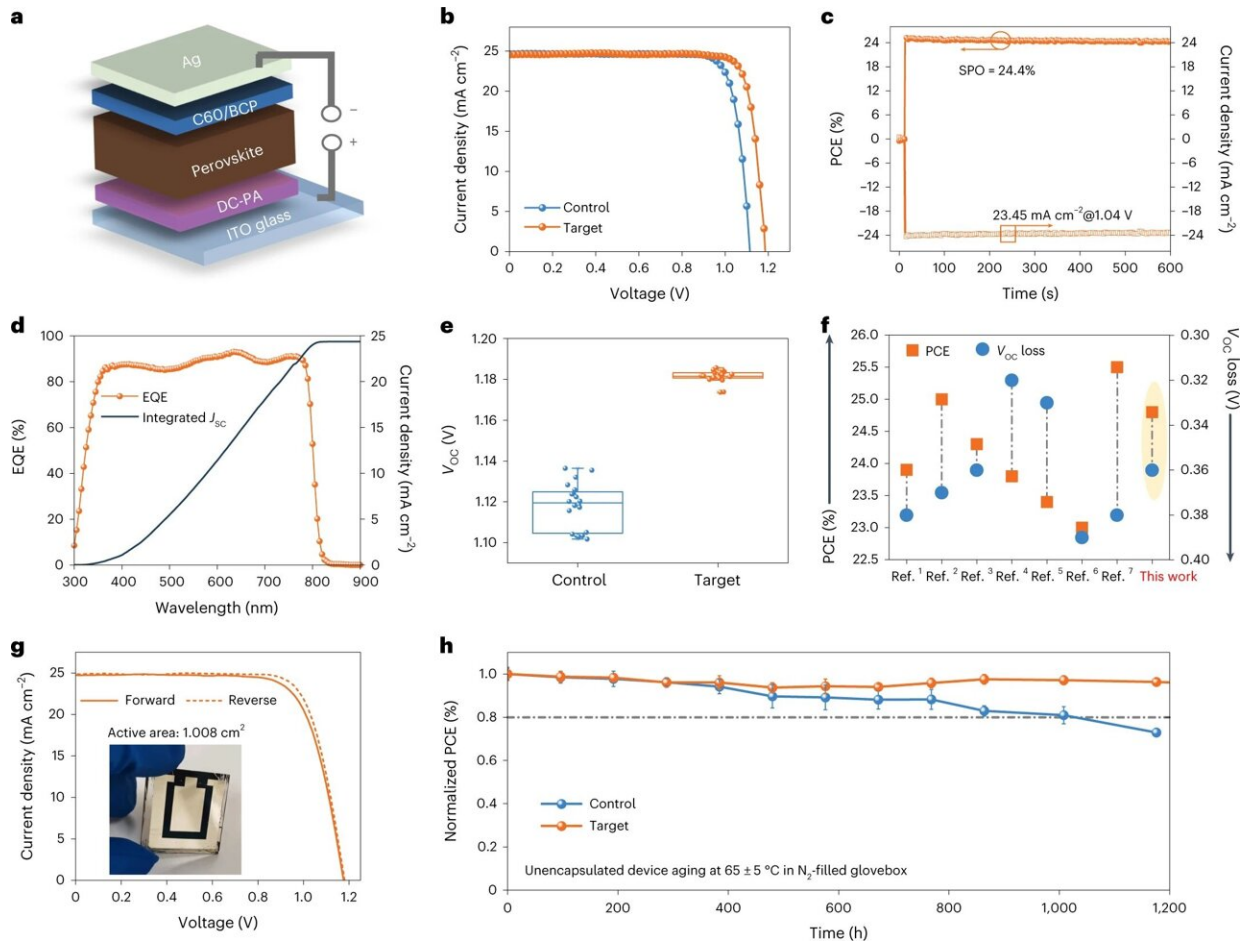

Characterization of photovoltaic performance and stability of PVSCs modified with the GBAC additive. Credit: © Li, F. et al., <https://www.nature.com/articles/s41566-023-01180-6>

Additionally, the unencapsulated devices exhibit improved thermal stability beyond 1,000 hours under continuous heating at  $65 \pm 5^\circ\text{C}$  in a nitrogen-filled glovebox while maintaining 98% of the original efficiency.

The team demonstrated the general applicability of this strategy for different perovskite compositions and large-area devices. For example, a

larger area device (1 cm<sup>2</sup>) in the experiment delivered a high PCE of 22.7% with this strategy, indicating excellent potential for fabricating scalable, highly efficient PVSCs.

"This work provides a clear path to achieving optimized perovskite film quality to facilitate the development of highly efficient and stable [perovskite](#) solar cells and their upscaling for practical applications," said Professor Jen.

In the future, the team aims to further extend the molecular structures and optimize the device structure through compositional and interfacial engineering. They will also focus on the fabrication of large-area devices.

The findings were published in the journal *Nature Photonics*.

**More information:** Fengzhu Li et al, Hydrogen-bond-bridged intermediate for perovskite solar cells with enhanced efficiency and stability, *Nature Photonics* (2023). [DOI: 10.1038/s41566-023-01180-6](https://doi.org/10.1038/s41566-023-01180-6)

Provided by City University of Hong Kong

Citation: Researchers develop an additive to efficiently improve the stability of perovskite solar cells (2023, May 4) retrieved 26 April 2024 from <https://techxplore.com/news/2023-05-additive-efficiently-stability-perovskite-solar.html>

This document is subject to copyright. Apart from any fair dealing for the purpose of private study or research, no part may be reproduced without the written permission. The content is provided for information purposes only.