


# A breakthrough in ceramic 3D printing

May 15 2023, by Peter Grad

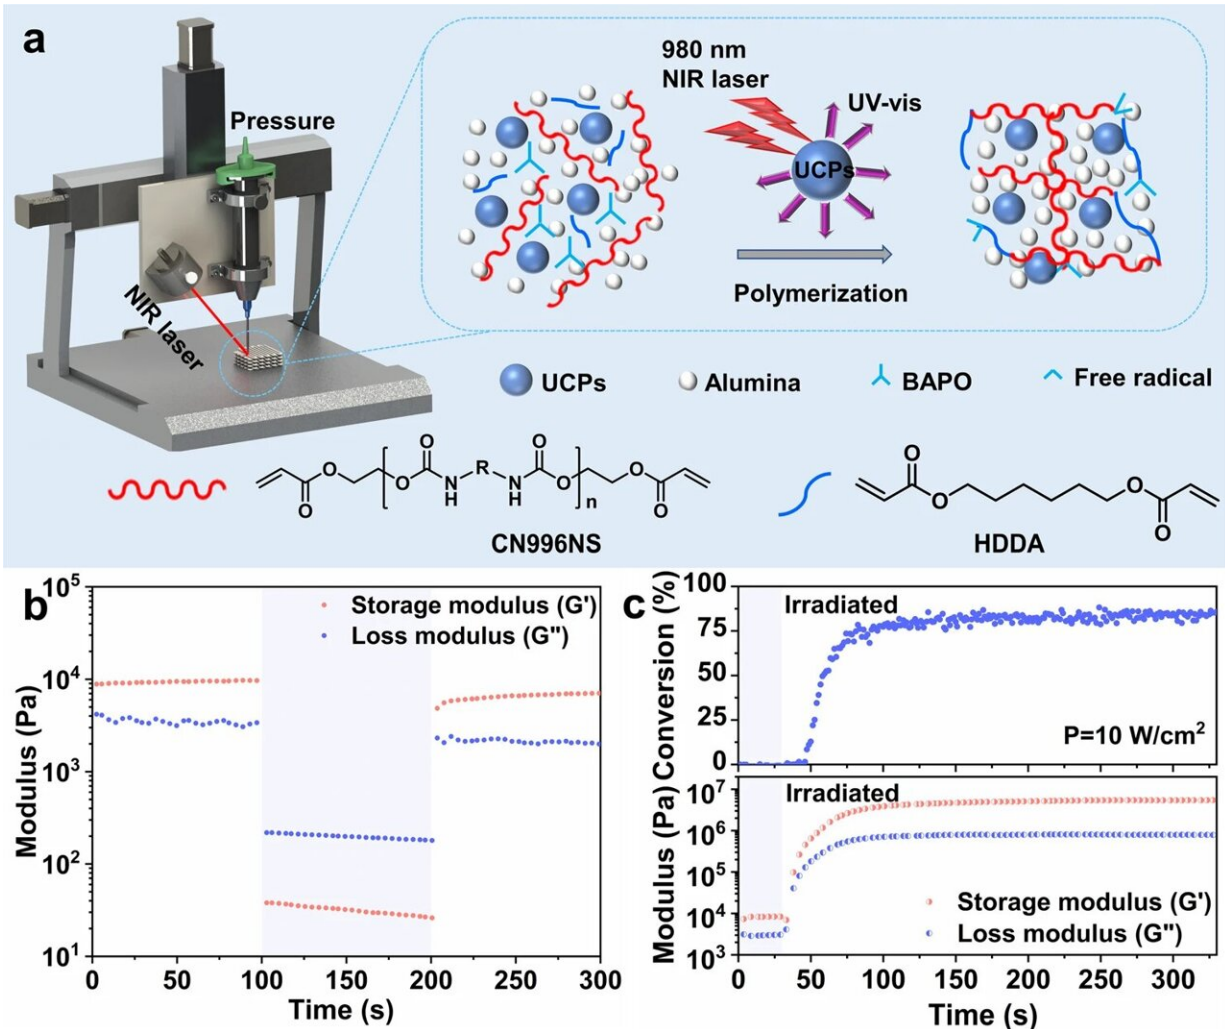

Performance of photosensitive ceramic slurry. **a** Schematic representation of NIR-assisted direct ink writing. **b** Three intervals thixotropic test showing the elastic recovery of the alumina slurry at a frequency of 1 Hz. **c** NIR-induced photopolymerization of slurry was monitored by real-time FTIR rheological analysis. The upper figure showed the double bond conversion as a function of

irradiation time. The figure below showed the modulus of the slurry as a functional relationship with the irradiation time. Credit: *Nature Communications* (2023). DOI: 10.1038/s41467-023-38082-8

For Chinese scientists at Jiangnan University, the shape of things to come rests on a ceramic slurry and 3D printing.

Led by Professor Liu Ren, university scientists developed a technique that permits the construction of complex shapes never before possible with traditional 3D printing. They achieved this by creating a ceramic concoction that turns solid almost instantly upon exposure to [near-infrared light](#).

The benefits of earlier processes used in 3D printing were often offset by issues of accuracy, speed and economy.

Stereolithography, for instance, which employs [laser beams](#) to fuse [small particles](#) of plastic, metal, glass or [ceramic powder](#) into a solid object, generally requires the production of support structures to hold large-scale or oddly shaped structures in place until the components are solidified. This adds time and cost to large projects.

The use of supportive structures—whether in stereolithography or other related approaches—also requires their eventual removal. This introduces potential problems regarding dimensional precision and surface smoothness. Furthermore, removal of support structures could introduce micro-cracks and even [structural failure](#) due to added weight stress.

Alternate ceramic production processes that enabled production without the use of support structures used [ultraviolet light](#) to harden components.

Those processes benefited from greater spatial control during the hardening stage. But that approach was dogged by limitations in the ability of ultraviolet light to penetrate ceramic slurries.

The Jiangnan University scientists found a workaround. They discovered they could construct objects with greater durability and quicker production times by using their ceramic paste with a hardening process based on near-infrared light, rather than ultraviolet light.

"By adjusting the irradiation intensity and printing speed, the ceramic slurry can be cured in-situ during extrusion without the use of supports," the scientists said in their report published recently by the journal *Nature Communications*.

"The increasing strength and self-supporting ability of the extruded filaments improves manufacturing precision. More importantly, the flexibility of 3D printing [makes] it easier to print low-angle or even horizontal overhangs without sagging or tilting defects."

They were able to construct complex objects that were strong enough to maintain their shape and stability in mid-air immediately after extrusion from the printer nozzle.

Comparing results between ultraviolet and near-infrared processes, the scientists found significant differences. When they tested the cure depth (hardening) of the slurry, they found that under ultraviolet light, the curing depth reached 1.02 mm after a little more than two minutes. But with near-infrared light, the curing depth was triple that of ultraviolet light while exposure time was just 3 seconds.

Summing up their results, the scientists said, "By optimizing the ink components and printing parameters (nozzle diameter, extrusion pressure, moving speed, light intensity, etc.), it is possible to obtain

objects with higher resolution and unique appearance."

They expressed confidence that with further studies on the near-infrared printing approach "ceramic geometries produced without support will help generate more innovations and [broaden] the application of additive manufacturing technologies."

**More information:** Yongqin Zhao et al, 3D printing of unsupported multi-scale and large-span ceramic via near-infrared assisted direct ink writing, *Nature Communications* (2023). [DOI: 10.1038/s41467-023-38082-8](https://doi.org/10.1038/s41467-023-38082-8)

© 2023 Science X Network

Citation: A breakthrough in ceramic 3D printing (2023, May 15) retrieved 26 April 2024 from <https://techxplore.com/news/2023-05-breakthrough-ceramic-3d.html>

This document is subject to copyright. Apart from any fair dealing for the purpose of private study or research, no part may be reproduced without the written permission. The content is provided for information purposes only.