


Carbon-based cathodes impact biofilm composition and performance in soil microbial fuel cells

May 12 2023

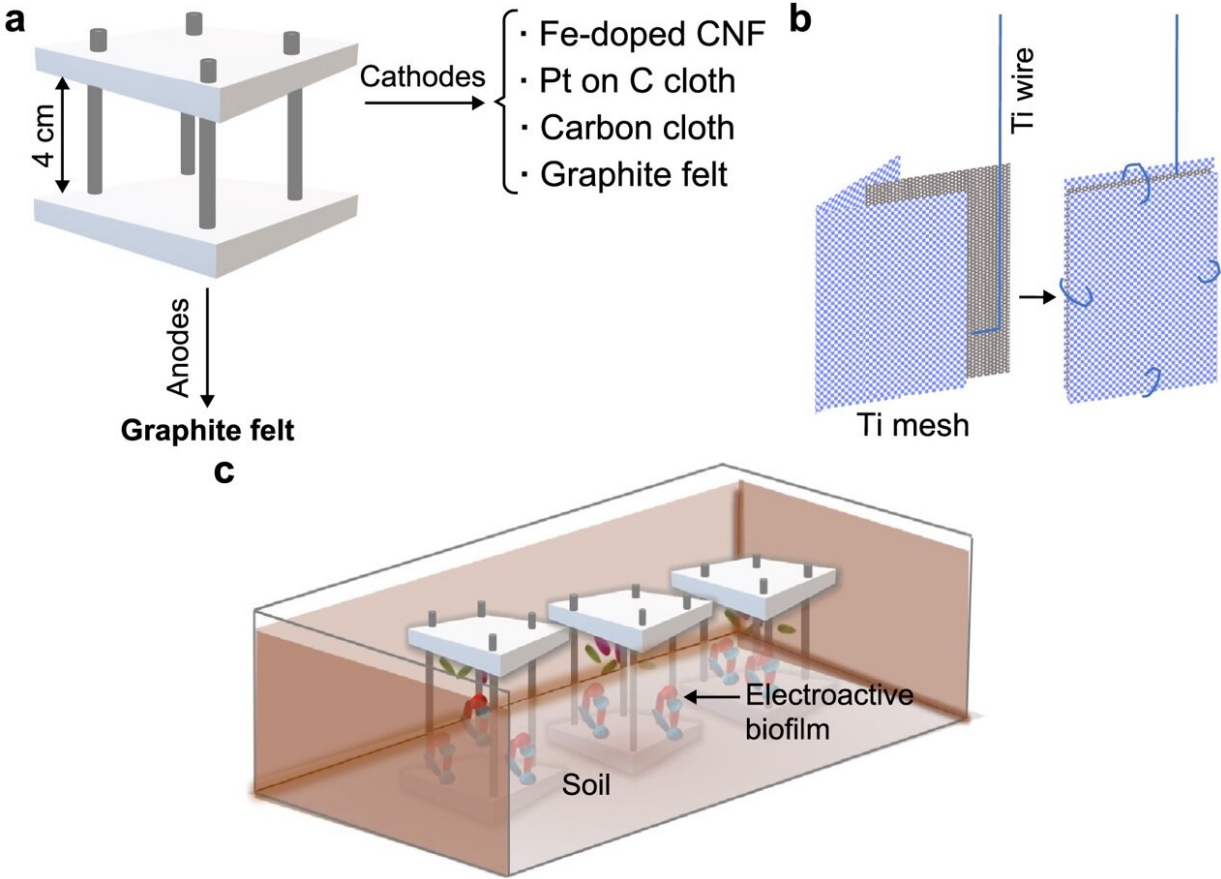

A. Design and electrode materials of the four SMFCs tested in this study. B. Cathode assembly. C. Experimental set-up. Credit: *Environmental Science and Ecotechnology* (2023). DOI: 10.1016/j.ese.2023.100276

In the context of increasing energy demands and environmental concerns, renewable energy solutions are crucial for achieving net-zero emissions by 2050. Microbial electrochemical technologies, such as SMFCs, are cost-effective and environmentally friendly, making them an attractive option for green energy systems. SMFCs utilize endogenous microorganisms present in soil to convert organic matter into electricity, offering a sustainable energy source and a self-powered in situ bioremediation strategy for contaminated soils.

Cathode materials play a significant role in the performance of microbial fuel cells. Researchers recently compared the performance of membrane-free air-cathode SMFCs using four different cathodes: [carbon](#) cloth, Pt-doped carbon cloth, graphite felt, and an innovative Fe-doped carbon nanofibers electrode. The researchers conducted electrochemical tests over extended periods, along with microbial taxonomic analyses, to assess the effect of electrode materials on biofilm formation and electrochemical performance.

In their study published in the journal *Environmental Science and Ecotechnology*, researchers from University of Bath revealed that Fe-doped carbon nanofibers and Pt-doped carbon cloth cathodes yielded stable performances, with peak power densities of 25.5 and 30.4 mW m⁻², respectively. Graphite felt cathodes demonstrated the best electrochemical performance, with a peak power density of 87.3 mW m⁻². However, they also exhibited the greatest instability.

An examination of microbial communities found differences between anodic and cathodic communities. Anodes were predominantly enriched with *Geobacter* and *Pseudomonas* species, while cathodic communities were dominated by hydrogen-producing and hydrogenotrophic bacteria. This suggests that hydrogen cycling could be a possible electron transfer mechanism. Additionally, the presence of nitrate-reducing bacteria in combination with cyclic voltammogram results indicated that microbial

nitrate reduction occurred on graphite felt cathodes.

The use of innovative Fe-doped carbon nanofiber cathodes provided an electrochemical performance comparable to Pt-doped carbon cloth, offering a low-cost alternative. However, graphite felt outperformed all other electrodes tested but displayed lower reproducibility and higher mass transport losses. Microbial taxonomic profiling of the [cathode](#) biofilms revealed the presence of taxa related to oxygen reduction or involvement in utilizing alternative electron acceptors, such as nitrate.

The results of this study can guide future research on low-cost, high-performing SMFCs for practical applications in energy harvesting and bioremediation. By understanding how electrode materials influence microbial communities and electrochemical performance, researchers can accelerate the translation of SMFCs into real-world implementations.

More information: Arpita Nandy et al, Influence of carbon-based cathodes on biofilm composition and electrochemical performance in soil microbial fuel cells, *Environmental Science and Ecotechnology* (2023). [DOI: 10.1016/j.ese.2023.100276](https://doi.org/10.1016/j.ese.2023.100276)

Provided by Chinese Society for Environmental Sciences

Citation: Carbon-based cathodes impact biofilm composition and performance in soil microbial fuel cells (2023, May 12) retrieved 11 December 2023 from <https://techxplore.com/news/2023-05-carbon-based-cathodes-impact-biofilm-composition.html>

This document is subject to copyright. Apart from any fair dealing for the purpose of private study or research, no part may be reproduced without the written permission. The content is provided for information purposes only.