


# Proposed design could double the efficiency of lightweight solar cells for space-based applications

June 6 2023

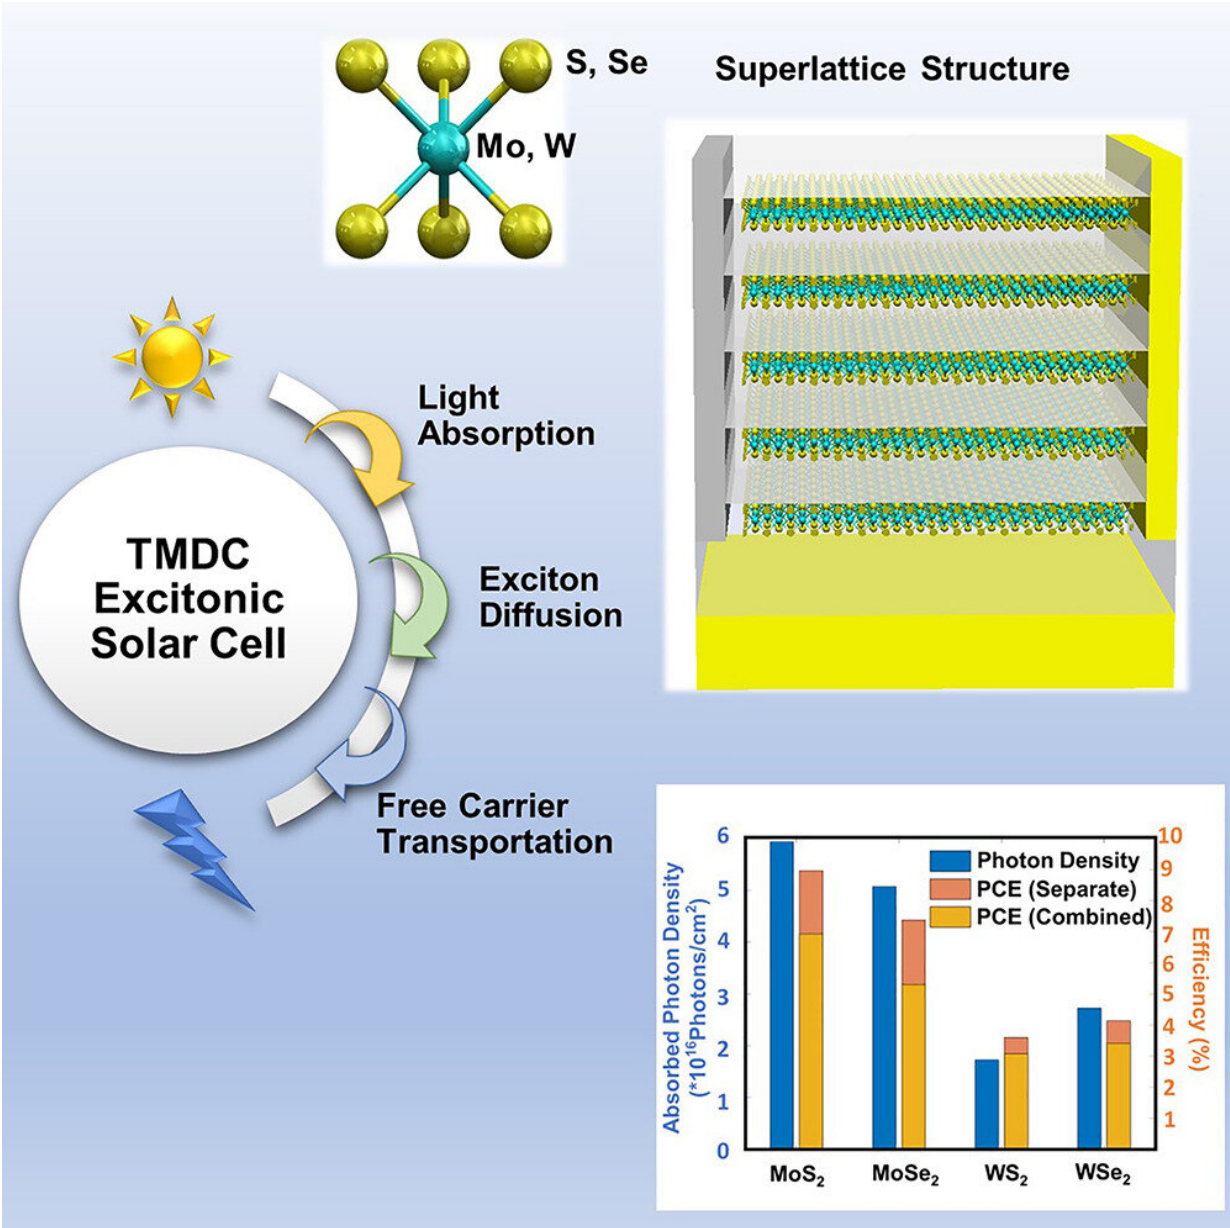

How good can 2D excitonic solar cells be? Credit: Device/Hu et al.

When it comes to supplying energy for space exploration and settlements, commonly available solar cells made of silicon or gallium arsenide are still too heavy to be feasibly transported by rocket. To address this challenge, a wide variety of lightweight alternatives are being explored, including solar cells made of a thin layer of molybdenum selenide, which fall into the broader category of 2D transition metal dichalcogenide (2D TMDC) solar cells.

Published June 6 in the inaugural issue of the journal *Device*, researchers propose a device design that can take the efficiencies of 2D TMDC devices from 5%, as has already been demonstrated, to 12%.

"I think people are slowly coming to the realization that 2D TMDCs are excellent photovoltaic materials, though not for terrestrial applications, but for applications that are mobile—more flexible, like space-based applications," says lead author and *Device* advisory board member Deep Jariwala of University of Pennsylvania. "The weight of 2D TMDC [solar cells](#) is 100 times less than silicon or [gallium arsenide](#) solar cells, so suddenly these cells become a very appealing technology."

While 2D TMDC solar cells are not as efficient as silicon solar cells, they produce more electricity per weight, a property known as "specific power." This is because a layer that is just 3 to 5 nanometers thick—or over a thousand times thinner than a human hair—absorbs an amount of sunlight comparable to commercially available solar cells. Their extreme thinness is what earns them the label of "2D"—they are considered "flat" because they are only a few atoms thick.

"High specific power is actually one of the greatest goals of any space-based light harvesting or energy harvesting technology," says Jariwala. "This is not just important for satellites or space stations but also if you want real utility-scaled [solar power](#) in space."

"The number of solar cells you would have to ship up is so large that no [space vehicles](#) currently can take those kinds of materials up there in an economically viable way. So, really the solution is that you double up on lighter weight cells, which give you much more specific power."

The full potential of 2D TMDC solar cells has not yet been fully realized, so Jariwala and his team have sought to raise the efficiency of the cells even further. Typically, the performance of this type of solar cell is optimized through the fabrication of a series of test devices, but Jariwala's team believes it is important to do so through modeling it computationally.

Additionally, the team thinks that to truly push the limits of efficiency, it is essential to properly account for one of the device's defining—and challenging to model—features: excitons.

Excitons are produced when the solar cell absorbs sunlight, and their dominant presence is the reason why a 2D TMDC solar cell has such high solar absorption. Electricity is produced by the solar cell when the positively and negatively charged components of an exciton are funneled off to separate electrodes.

By modeling the solar cells in this way, the team was able to devise a design with double the efficiency compared to what has already been demonstrated experimentally.

"The unique part about this device is its superlattice structure, which essentially means there are alternating layers of 2D TMDC separated by

a spacer or non-semiconductor layer," says Jariwala. "Spacing out the layers allows you to bounce light many, many times within the cell structure, even when the cell structure is extremely thin."

"We were not expecting cells that are so thin to see a 12% value. Given that the current efficiencies are less than 5%, my hope is that in the next four to five years people can actually demonstrate cells that are 10% and upwards in efficiency."

Jariwala says the next step is to think about how to achieve large, wafer-scale production for the proposed design. "Right now, we are assembling these superlattices by transferring individual materials one on top of the other, like sheets of paper. It's as if you're tearing them off from one book, and then pasting them together like a stack of sticky notes," says Jariwala. "We need a way to grow these materials directly one on top of the other."

**More information:** Hu, et al. How Good Can 2D Excitonic Solar Cells Be?, *Device* (2023). [DOI: 10.1016/j.device.2023.100003](https://doi.org/10.1016/j.device.2023.100003).  
[cell.com/device/fulltext/S2666-9986\(23\)00003-0](https://www.cell.com/device/fulltext/S2666-9986(23)00003-0)

Provided by Cell Press

Citation: Proposed design could double the efficiency of lightweight solar cells for space-based applications (2023, June 6) retrieved 30 November 2023 from <https://techxplore.com/news/2023-06-efficiency-lightweight-solar-cells-space-based.html>

This document is subject to copyright. Apart from any fair dealing for the purpose of private study or research, no part may be reproduced without the written permission. The content is provided for information purposes only.