


# Researchers improve performance of all-solid-state lithium-sulfur batteries

August 28 2023, by Li Yuan

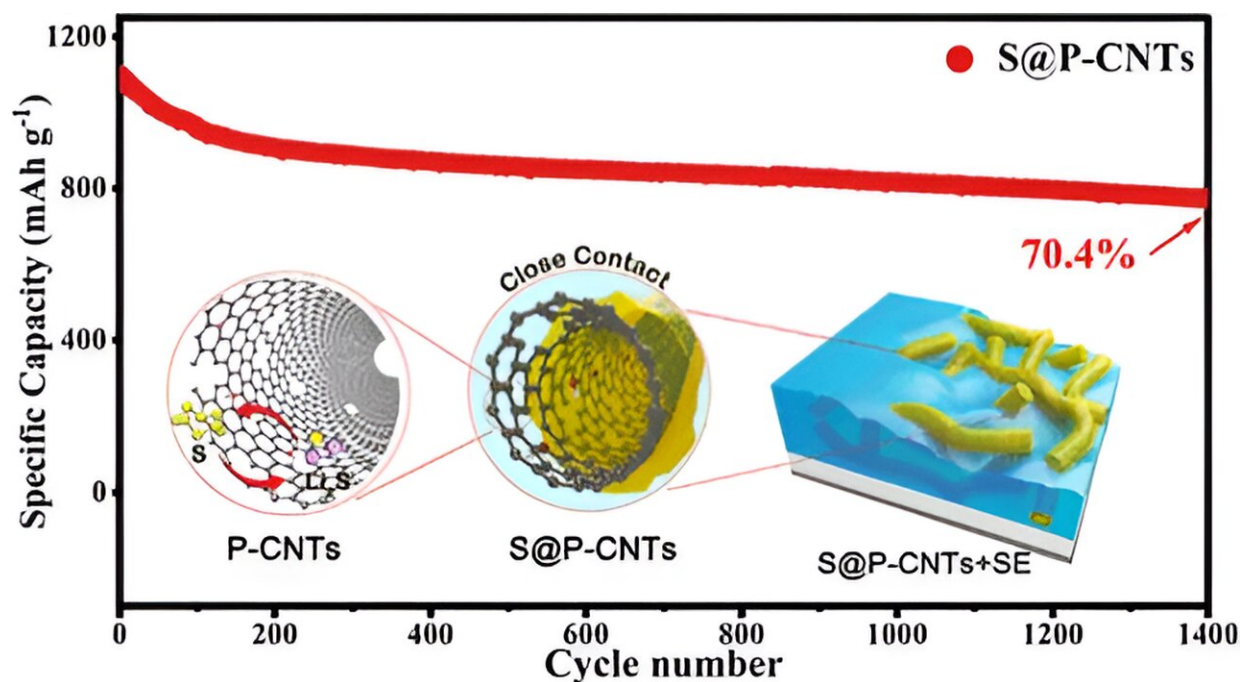

Graphical abstract. Credit: *ACS Applied Materials & Interfaces* (2023). DOI: 10.1021/acsami.3c07249

All-solid-state lithium–sulfur batteries (ASSLSBs) are considered one of the most promising next-generation energy storage devices for high energy density, high safety, and low cost of sulfur.

Recently, researchers led by Prof. Wu Jianfei from the Qingdao Institute

of Bioenergy and Bioprocess Technology (QIBEBT) of the Chinese Academy of Sciences have made a breakthrough in defect engineering and performance improvement of ASSLSBs.

They prepared porous-carbon nanotubes (P-CNTs) that are used as sulfur-bearing matrix, forming S@P-CNTs-based composite cathodes for ASSLSBs. P-CNTs acted as a mediator and established a stable triple phase between sulfur, P-CNTs, and ionic conductor solid-state electrolyte (SSE)  $\text{Li}_6\text{PS}_5\text{Cl}$ . The study was published in *ACS Applied Materials & Interfaces* on Aug. 18.

Through designing defects and increasing [active sites](#) on the surface of P-CNTs, sulfur was uniformly encapsulated on the inner and outer surfaces of the activated P-CNTs. The reaction activity and stability of the sulfur cathode in the ASSLSB could be substantially improved by optimizing the ion and electron transport networks.

The researchers proved that the migration of lithium ions at the interface between P-CNTs and SE was easier, benefiting the coulombic efficiency and cycle stability of the ASSLSB.

The S@P-CNTs-based ASSLSBs displayed [capacity](#) of  $1,099.2 \text{ mA h g}^{-1}$  at [current density](#) of  $1.34 \text{ mA cm}^{-2}$  and  $1.5 \text{ mg cm}^{-2}$  [sulfur](#) loading and maintained 70.4% of the initial capacity over 1,400 cycles.

The SSE developed by the group can provide good charging and discharging performance for batteries even under  $-40 \text{ }^\circ\text{C}$ . The capacity of soft pack all-solid-state batteries (ASSBs) using this electrolyte can maintain 82.7% capacity after cycling 3,000 times at  $25 \text{ }^\circ\text{C}$  and  $0.5 \text{ }^\circ\text{C}$ , which initially solves the life-span problem of sulfide ASSBs.

"Our work provides a new strategy for the microstructural engineering of carbon materials and interfacial modification for high-performance

ASSLSBs," said Prof. Wu.

**More information:** Cheng Wang et al, Synergistic Defect Engineering and Interface Stability of Activated Carbon Nanotubes Enabling Ultralong Lifespan All-Solid-State Lithium–Sulfur Batteries, *ACS Applied Materials & Interfaces* (2023). [DOI: 10.1021/acsami.3c07249](https://doi.org/10.1021/acsami.3c07249)

Provided by Chinese Academy of Sciences

Citation: Researchers improve performance of all-solid-state lithium-sulfur batteries (2023, August 28) retrieved 28 April 2024 from <https://techxplore.com/news/2023-08-all-solid-state-lithium-sulfur-batteries.html>

This document is subject to copyright. Apart from any fair dealing for the purpose of private study or research, no part may be reproduced without the written permission. The content is provided for information purposes only.