


# Securing carbon fiber from waste coal

November 22 2023

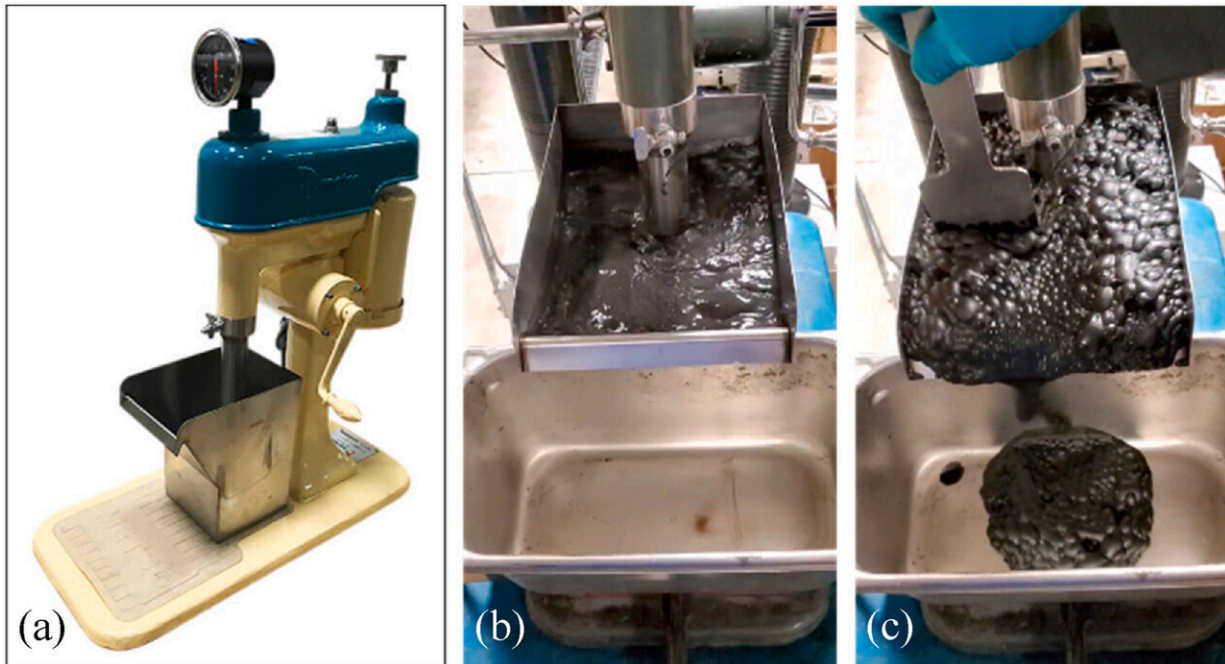

Photos showing (a) Denver flotation machine, (b) dried WKY #9 underflow being mixed in DI water, and (c) the floated coal being collected after the addition of the frother and collector. (A color version of this figure can be viewed online.). Credit: *Carbon* (2023). DOI: 10.1016/j.carbon.2023.118590

At the University of Kentucky's Center for Applied Energy Research (CAER), scientists' innovative research to turn Kentucky waste coal into high-value carbon products has been published in the journal [Carbon](#).

The publication titled "Isotropic pitch-derived [carbon fiber](#) from [waste](#)

coal" is the work of CAER's Carbon Materials Research Group. Authors include John Craddock, George Frank, Michela Martinelli, Justin Lacy, Vivian Edwards, Asmund Vego, Christina Thompson, Rodney Andrews and Matthew Weisenberger.

"We believe this is the first time that carbon fiber has been produced from a recovered waste coal," said Craddock, lead author of the paper. "This technology could be useful for both low-cost carbon fibers and potential remediation of waste coal impoundments."

CAER's carbon materials researchers have become [global leaders](#) in turning an environmental liability—impounded waste coal—into a highly sought-after strategic material that is critical to the nation's transportation, [national security](#), and renewable energy sectors.

The technology employed at CAER shows great promise for building a cost-competitive, domestic supply chain for carbon fiber and graphite, strategic materials that are increasingly important to our global economy.

"Coal utilization as an alternative low-cost precursor for carbon products including graphite and carbon fiber has garnered renewed interest," the authors state in the paper. "Yet little attention has been given to waste coal as a resource."

Before burning mined coal for [power generation](#), it undergoes washing at preparation plants to remove noncombustible materials. The authors explain this process results in a slurry called underflow, consisting mainly of fine coal, small rock, and clay particles suspended in water. Underflow is typically pumped to an impoundment, an embankment constructed for permanent disposal of mining by-product materials.

"It is estimated that about 58 gigatons of this waste coal have been deposited in impoundments around the world," the authors wrote. "Coal,

being a high-carbon material, has garnered attention as a low-cost precursor material for processes and products which capitalize on its inherent aromatic carbon composition."

This project and breakthrough demonstrate an important utility for an otherwise problematic environmental waste.

The project "C4WARD: Coal Conversion for Carbon Fibers and Composites" focuses on developing the fundamental and translational science and engineering necessary to create energy-efficient and cost-effective processes for manufacturing [carbon](#) fibers and graphite from [coal](#) with tunable properties.

**More information:** John D. Craddock et al, Isotropic pitch-derived carbon fiber from waste coal, *Carbon* (2023). [DOI: 10.1016/j.carbon.2023.118590](#)

Provided by University of Kentucky

Citation: Securing carbon fiber from waste coal (2023, November 22) retrieved 9 May 2024 from <https://techxplore.com/news/2023-11-carbon-fiber-coal.html>

<p>This document is subject to copyright. Apart from any fair dealing for the purpose of private study or research, no part may be reproduced without the written permission. The content is provided for information purposes only.</p>
--