


Research enhances stability and efficiency of perovskite solar cells

January 10 2024, by JooHyeon Heo

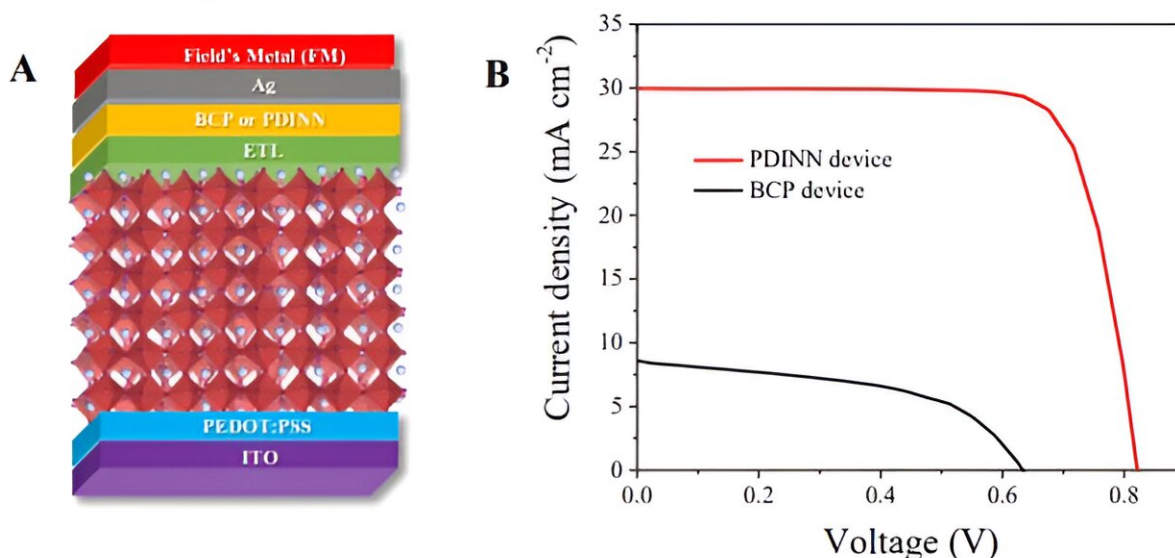

(A) Structure of a PV device with additional FM deposition. (B) J–V characteristics of PV devices with an FM layer under AM 1.5G one-sun illumination. Credit: *Advanced Energy Materials* (2023). DOI: 10.1002/aenm.202302555

A research team has achieved notable advancements in the stability and efficiency of perovskite solar cells. Their work not only paves the way for the commercialization of perovskite solar cells (PSCs), but also offers significant potential in green hydrogen production technology, ensuring long-term operation with high efficiency. The study has been

[published](#) in *Advanced Energy Materials*.

Perovskite [solar cells](#) (PSCs) have garnered attention due to their reduced toxicity and broad light absorption capabilities, making them highly promising for photovoltaic applications. However, the presence of inherent ionic vacancies in tin-lead halide perovskites (TLHPs) has posed challenges, leading to accelerated device degradation through inward metal diffusion.

To address this challenge, the research team developed a chemically protective cathode interlayer using amine-functionalized perylene diimide (PDINN). By leveraging its nucleophilic sites to form tridentate metal complexes, PDINN effectively extracts electrons and suppresses inward metal diffusion. The novel solution-processed PDINN cathode interlayer has showcased remarkable performance in stabilizing TLHP-based photovoltaic (PV) and photoelectrochemical (PEC) devices.

The PV device achieved an impressive efficiency of 23.21%, with over 81% retention after 750 hours of operation at 60°C, and more than 90% retention after 3,100 hours at $23 \pm 4^\circ\text{C}$. Additionally, the TLHP-based PEC devices, coupled with biomass oxidation, exhibited a record-high bias-free solar hydrogen production rate of 33.0 mA cm^{-2} , approximately 1.7-fold higher than the target set by the U.S. Department of Energy for one-sun hydrogen production.

Their innovative design of the cathode interlayer has successfully demonstrated the immense potential of TLHPs for efficient and stable photoconversion.

The research team from the School of Energy and Chemical Engineering at UNIST was jointly led by Professors Sung-Yeon Jang, Jungki Ryu, and Ji-Wook Jang, in collaboration with Professor Sang Kyu Kwak from Korea University.

"We have dramatically increased the long-term stability of tin-lead PSCs," explained Professor Jang. "Our goal is not only to convert [light energy](#) into [electrical energy](#) but also to develop eco-friendly methods for producing basic chemicals, such as hydrogen, which form the foundation of various industries."

More information: Muhibullah Al Mubarak et al, Efficient and Stable Tin–Lead Perovskite Photoconversion Devices Using Dual-Functional Cathode Interlayer, *Advanced Energy Materials* (2023). [DOI: 10.1002/aenm.202302555](https://doi.org/10.1002/aenm.202302555)

Provided by Ulsan National Institute of Science and Technology

Citation: Research enhances stability and efficiency of perovskite solar cells (2024, January 10) retrieved 28 April 2024 from <https://techxplore.com/news/2024-01-stability-efficiency-perovskite-solar-cells.html>

<p>This document is subject to copyright. Apart from any fair dealing for the purpose of private study or research, no part may be reproduced without the written permission. The content is provided for information purposes only.</p>
--