


AI-driven method helps improve quality assurance for wind turbines

February 22 2024, by Sandrine Perroud

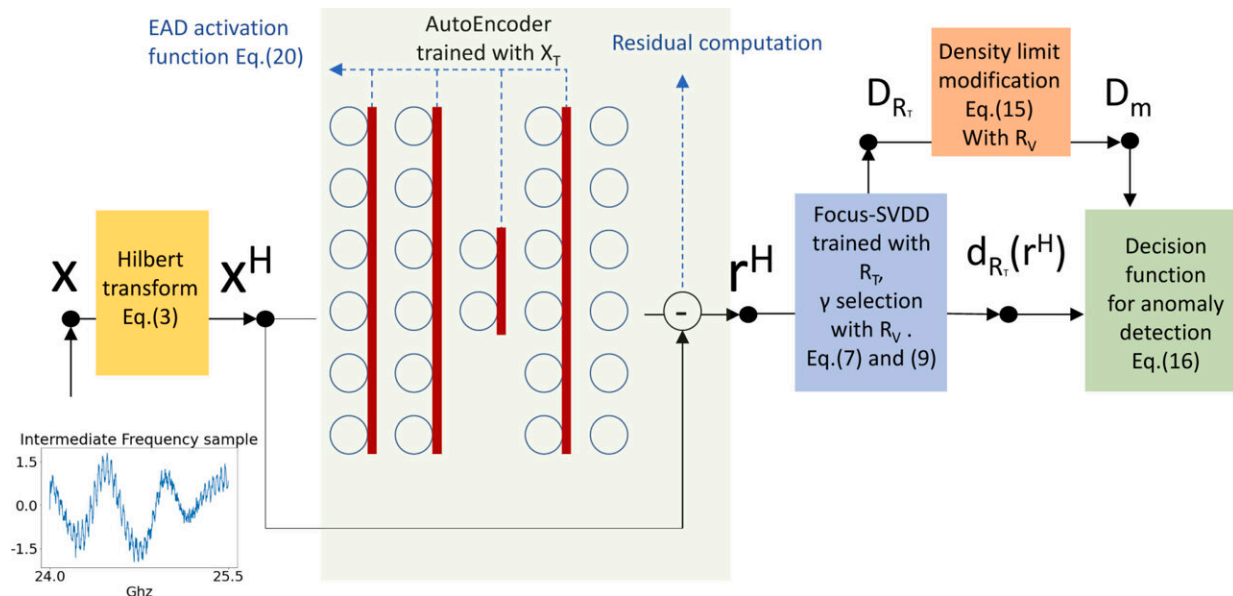

Proposed framework for anomaly detection using IF signal of FMCW radars, X_T corresponds to the training dataset, R_T and R_V correspond respectively to the residual training and validation dataset. Credit: *Mechanical Systems and Signal Processing* (2023). DOI: 10.1016/j.ymsp.2023.111022

An international collaboration between EPFL and the University of Glasgow has led to an advanced machine-learning algorithm to effectively detect concealed manufacturing defects in wind turbine composite blades—before turbines are put into service.

Faulty wind turbine blades can incur huge costs for the companies that operate them, especially if the defects go unnoticed until it's too late. That's why [quality assurance](#) is such a strategic issue for global wind turbine manufacturers. Today, quality inspections are limited to surface inspection of limited areas as these composite structures roll off the production line.

But under a new approach co-created by EPFL and University of Glasgow researchers, inspection engineers can use a new patented radar technology, combined with an AI assistant, to detect possible anomalies beneath the surface. This approach has many advantages: it's non-destructive, non-contact, supports agile and rapid data acquisition and analysis, and requires very little power to operate. The [research](#) has just been published in *Mechanical Systems and Signal Processing*.

Merging signal processing and AI

The research draws on earlier work from both institutional partners. This work was led by Olga Fink, today a tenure-track assistant professor of civil engineering and head of the Intelligent Maintenance and Operations Systems Laboratory (IMOS) within EPFL's School of Architecture, Civil and Environmental Engineering (ENAC).

In previous research, she has developed methods for detecting anomalies by processing the sounds produced by faulty machines, for background noise suppression on [audio recordings](#) and for classifying bird songs by infusing learning capabilities into well-known and well-grounded [signal processing](#) approaches.

"Manufacturers are building wind turbines bigger, with more complicated designs. All that increases the chances of a defect occurring during the manufacturing stage," says Olga Fink, head of the Intelligent Maintenance and Operations Systems Laboratory (IMOS).

Today, she's looking at new applications for her AI-driven systems. "Wind turbines are made from several different composite materials like fiberglass and carbon fiber," she says. "Manufacturers are also building them bigger, with more complicated designs. All that increases the chances of a defect occurring during the manufacturing stage."

Measurement technology

The University of Glasgow team, led by Prof. David Flynn, James Watt School of Engineering, and Head of Research Division for Autonomous Systems and Connectivity has pioneered methods in prognostics and health management. They have explored how Robotics and Artificial Intelligence (RAI) can support net zero infrastructure.

The researchers in Glasgow used a patented Frequency Modulated Continuous Wave radar with a robotic arm to inspect industrial wind-turbine blade samples at distances of 5, 10 and 15 centimeters from the sample. Using signal processing methods, they could isolate features and precursors to future failures in these complex composite samples (see below a video produced by the University of Glasgow).

Improving data representation

When providing this [experimental data](#) to the IMOS team, the challenge was to enhance the information content of the features embedded within this raw data. It turned out that the signals obtained by the radar varied depending on the inspection distance and the blade's surface material and core material.

Gaëtan Frusque, a postdoc at IMOS and the study's lead author, explains, "At IMOS, we used a complex-value representation of the signals to better separate the information they contain, and to adapt the AI model accordingly." As a result, the algorithm they developed can distinguish

anomalies from uniform turbine parts.

The Glasgow researchers now plan to collect more data to further validate the IMOS results. The researchers plan to eventually test their method on existing turbines, which they can do by fitting the sensor to a robotic arm or onto a drone. This should enable them to spot manufacturing defects in turbines before they're put into service or to inspect the turbines during operation. Once installed, defect-free turbines can operate for around 20 years.

More information: Gaëtan Frusque et al, Non-contact sensing for anomaly detection in wind turbine blades: A focus-SVDD with complex-valued auto-encoder approach, *Mechanical Systems and Signal Processing* (2023). [DOI: 10.1016/j.ymssp.2023.111022](https://doi.org/10.1016/j.ymssp.2023.111022)

Provided by Ecole Polytechnique Federale de Lausanne

Citation: AI-driven method helps improve quality assurance for wind turbines (2024, February 22) retrieved 28 April 2024 from <https://techxplore.com/news/2024-02-ai-driven-method-quality-turbines.html>

This document is subject to copyright. Apart from any fair dealing for the purpose of private study or research, no part may be reproduced without the written permission. The content is provided for information purposes only.