


Researchers develop non-contact touch sensors for robotics

February 27 2024

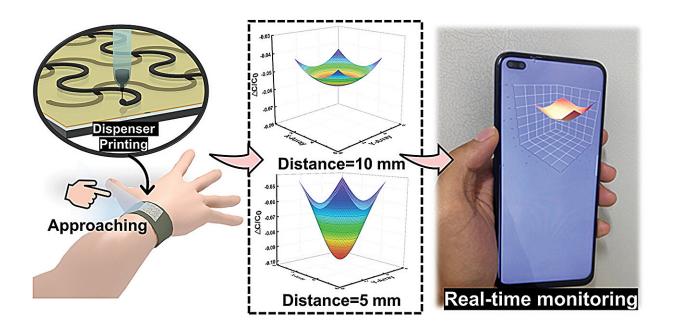

Credit: *Science and Technology of Advanced Materials* (2024). DOI: 10.1080/14686996.2024.2311635

A radical new type of touch sensor for robotics and other bio-mimicking (bionic) applications is so sensitive it works even without direct contact between the sensor and the objects being detected. It senses interference in the electric field between an object and the sensor, at up to 100 millimeters from the object.

The researchers at Qingdao University in China, with collaborators



elsewhere in China and South Korea, describe their innovation in the journal <u>Science and Technology of Advanced Materials</u>.

Electronic skins have become a crucial element in bionic robots, allowing them to detect and react to external stimuli promptly. This can allow <u>robotic systems</u> to analyze an object's shape, and, if required, also to pick it up and manipulate it.

The sensors in most current systems rely on direct touch causing a physical deformation of a contact layer, leading to changes in electrical capacitance. Unfortunately, the uniformity of the response to different regions limits the sensitivity and overall abilities of such systems.

"To bring greater sensitivity and versatility we have developed new composite films with surprising and very useful electrical properties," says Xinlin Li of the Qingdao University team.

The most surprising aspect came when the researchers combined two materials with a high dielectric constant—a measure of their response to electric fields. This composite had an unexpectedly low dielectric constant, a counter-intuitive result that is ideally suited to making a sensor that is more sensitive to electric fields.

The composite consists of small amounts of graphitic carbon nitride added to polydimethylsiloxane. It can be made and processed by a specific 3D printing method, called dispensing printing, that offers fine control over the structure and pattern of the printed high-viscous ink.

The team used this to make a grid that could sense objects while between 5 and 100 millimeters away from the object's surface. They tested the grid's capabilities by using the researchers' fingers as the objects being detected, as they approached close to the grid but without actually making contact.



"The performance was outstanding, in terms of <u>sensitivity</u>, speed of response and robust stability through many cycles of use," says Li. "This opens new possibilities in the field of wearable objects and electronic skin."

She adds that it is suitable for making the physically flexible sensors needed for wearable technologies. These could be applied for medical monitoring, or more general uses in the fast developing "internet of things" (IoT), involving remote control of a wide variety of appliances.

Incorporating the sensing grid into a <u>printed circuit board</u> allowed the data it collects to be transmitted over the 4G networks widely used by mobile phones.

The team now plans to refine the technology with to develop its suitability for mass production. They also want to explore further possibilities beyond merely detecting shape and movement.

For example, different units in the sensor array have the ability to respond sequentially, which provides the possibility of realizing <u>human-computer interaction</u>, such as gesture recognition. The performance of the sensors in the contact and non-contact systems also reflects their potential in human motion detection, such as obstacle avoidance and gait monitoring, which could be applied in intelligent medical care.

More information: Bingxiang Li et al, Fully printed non-contact touch sensors based on GCN/PDMS composites: enabling over-the-bottom detection, 3D recognition, and wireless transmission, *Science and Technology of Advanced Materials* (2024). DOI: 10.1080/14686996.2024.2311635



Provided by Science and Technology of Advanced Materials

Citation: Researchers develop non-contact touch sensors for robotics (2024, February 27) retrieved 8 May 2024 from <u>https://techxplore.com/news/2024-02-contact-sensors-robotics.html</u>

This document is subject to copyright. Apart from any fair dealing for the purpose of private study or research, no part may be reproduced without the written permission. The content is provided for information purposes only.