


Highest power efficiency achieved in flexible solar cells using new fabrication technique

March 27 2024

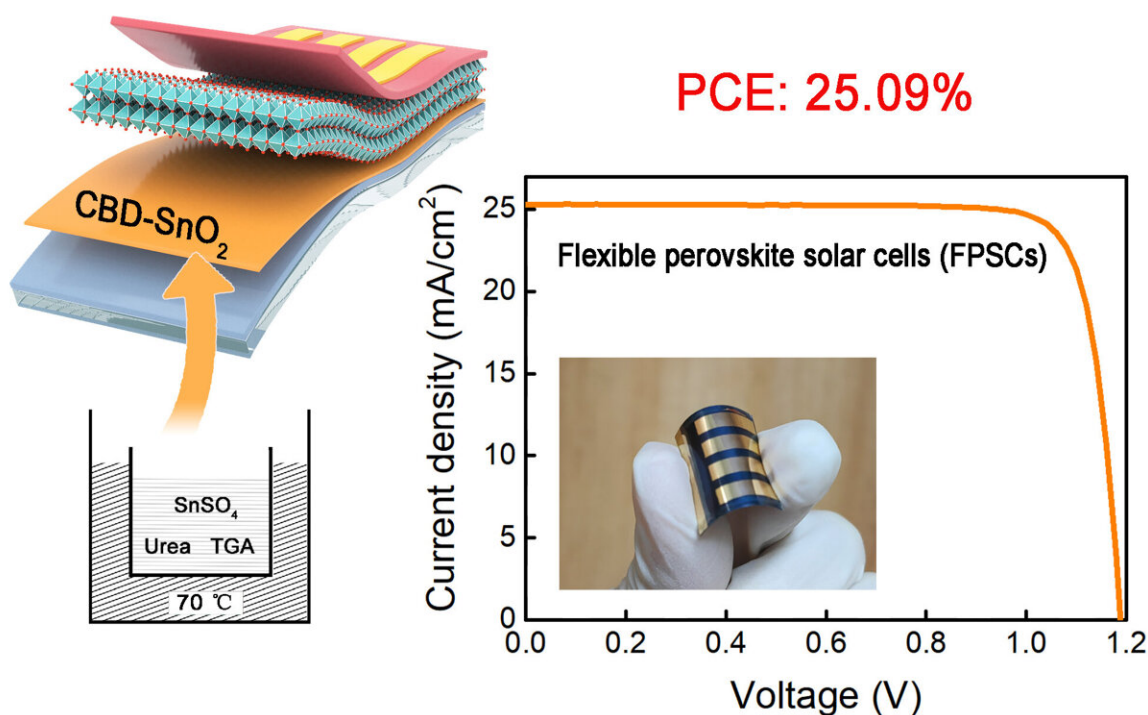

SnSO_4 is used as a tin precursor for the tin oxide (SnO_2) deposited as the electron transport layer of FPSCs. A new CBD manufacturing method allows more control over SnO_2 growth, improving the overall power conversion efficiency of the solar cell and increasing the practicality of flexible solar cell technology. Credit: iEnergy, Tsinghua University Press

Flexible solar cells have many potential applications in aerospace and flexible electronics, but low energy conversion efficiency has limited their practical use. A new manufacturing method has increased the power efficiency of flexible solar cells made from perovskite, a class of compounds with a specific crystalline structure that facilitates the conversion of solar energy into electricity.

Current flexible perovskite solar cells (FPSCs) suffer from lower power conversion efficiency than rigid perovskite solar cells because of the soft and inhomogeneous characteristics of the flexible base material, made of polyethylene terephthalate (PET), the perovskite films of FPSCs are built upon.

FPSCs also have lower durability than rigid solar cells that use glass as a base substrate. Pores in flexible solar cell substrates allow water and oxygen to invade the perovskite materials, causing them to degrade.

To address these issues with current FPSC technology, a team of material scientists from the State Key Laboratory of Power System Operation and Control at Tsinghua University and the Center for Excellence in Nanoscience at the National Center for Nanoscience and Technology in Beijing, China, developed a new fabrication technique that increases the efficiency of FPSCs, paving the way for use of the technology on a much larger scale.

The team published their study in [*iEnergy*](#).

"Increasing the power conversion efficiency of FPSCs is crucial for several reasons: higher efficiency... makes FPSCs more competitive with other solar cell technologies, decreases the cost per watt of generated electricity... and resources needed to produce the same amount of electrical power and increases the range of applications where FPSCs can be practically used, including aerospace and [flexible](#)

[electronics](#) where space and weight are at a premium," said Chenyi Yi, associate professor in the State Key Laboratory of Power System Operation and Control at Tsinghua University and senior author of the paper.

Specifically, the team developed a new chemical bath deposition (CBD) method of depositing [tin oxide](#) (SnO_2) on a flexible substrate without requiring a strong acid, which many flexible substrates are sensitive to. The new technique allowed the researchers more control over tin oxide growth on the flexible substrate. Tin oxide serves as an electron transport layer in the FPSC, which is critical for power conversion efficiency.

"This CBD method differs from previous research by using SnSO_4 tin sulfate rather than SnCl_2 tin chloride as a tin precursor for depositing SnO_2 , making the new method... compatible with acid-sensitive flexible substrates," said Yi.

Importantly, the new fabrication method also addresses some of the durability concerns over FPSCs. "The residual SO_4^{2-} sulfate left over after the SnSO_4 -based CBD additionally benefits the stability of the PSCs because of the strong coordination between Pb^{2+} lead from perovskite and SO_4^{2-} from SnO_2 . As a result, we can fabricate higher quality SnO_2 to achieve more efficient and stable FPSCs," said Yi.

The team achieved a new benchmark for highest power conversion efficiency for FPSCs at 25.09% and was certified at 24.90%. The durability of the SnSO_4 -based [flexible solar cells](#) was also demonstrated by cells maintaining 90% of their power conversion efficiency after the cells were bent 10,000 times. SnSO_4 -based flexible solar cells also showed improved high-temperature stability compared to SnCl_2 -based flexible solar cells.

The new fabrication method developed by the research team produced

reproducible results and allowed manufacturers to reuse the chemical bath, increasing the practicality of scalable FPSC production.

"The ultimate goal is to transition these high-efficiency FPSCs from laboratory scale to industrial production, enabling widespread commercial application of this technology in various fields, from wearable technology, portable electronics, and aerospace power sources to large-scale renewable energy solutions," said Yi.

More information: Ningyu Ren et al, 25% — Efficiency flexible perovskite solar cells via controllable growth of SnO_2 , *iEnergy* (2024). [DOI: 10.23919/IEN.2024.0001](https://doi.org/10.23919/IEN.2024.0001)

Provided by Tsinghua University Press

Citation: Highest power efficiency achieved in flexible solar cells using new fabrication technique (2024, March 27) retrieved 8 May 2024 from <https://techxplore.com/news/2024-03-highest-power-efficiency-flexible-solar.html>

<p>This document is subject to copyright. Apart from any fair dealing for the purpose of private study or research, no part may be reproduced without the written permission. The content is provided for information purposes only.</p>
--