


# A new strategy for fabricating high-density vertical organic electrochemical transistor arrays

March 31 2024, by Ingrid Fadelli

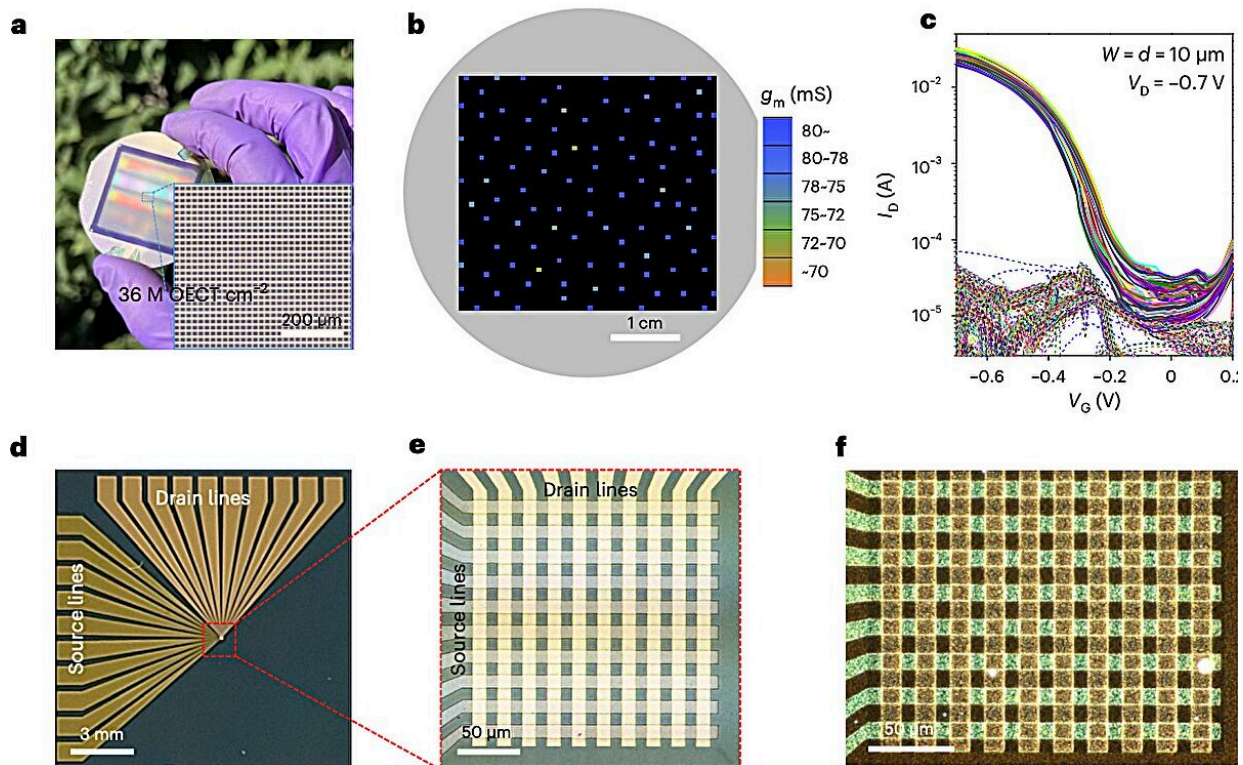

High-density monolithically integrated vOECT arrays fabricated by e-beam exposure. a, Photograph of 2-inch wafer-scale vOECT arrays comprising bgDPP-g2T OECTs. Inset, zoomed-in microscope image of the vOECT arrays. b, Transconductance map of the wafer-scale vOECTs; the spots indicate the measured devices. c, Transfer characteristics of 100 bgDPP-g2T vOECTs ( $W = d = 10 \mu\text{m}$ ). d–f, Low (d) and high (e) magnification optical microscopy images,

and CPOM image (f) of a bgDPP-g2T vOECT array. g, Circuit schematic of  $10 \times 10$  vOECT active-matrix arrays (DL = drain line, SL = source line). h, Transconductance distribution in the  $10 \times 10$  bgDPP-g2T vOECT arrays. i, Statistical distribution histograms of transconductance (left) and threshold voltage (right) for 100 devices, which are all functioning. Credit: *Nature Electronics* (2024). DOI: 10.1038/s41928-024-01127-x

Organic electrochemical transistors (OECTs) are an emerging class of transistors based on organic superconducting materials known for their ability to modulate electrical current in response to small changes in the voltage applied to their gate electrode. Like other electronics based on organic semiconductors, these transistors could be promising for the development of various brain-inspired and wearable technologies.

OECTs have various notable advantages, including promising amplification and sensing capabilities, low driving voltages, and a versatile structure. Despite these advantages, most conventional OECTs developed so far have been found to exhibit various limitations, including limited stability and slow redox processes, which can significantly impair their performance.

Researchers at Northwestern University recently outlined a new strategy to fabricate high-density and mechanically flexible OECTs. Their proposed approach, outlined in a [paper](#) in *Nature Electronics*, was used to create various electronic components based on OECT arrays and circuits.

"Organic electrochemical transistors (OECTs) can be used to create biosensors, wearable devices, and neuromorphic systems," Jaehyun Kim, Robert M. Pankow, and their colleagues wrote in their paper.

"However, restrictions in the micro- and nanopatterning of organic semiconductors, as well as topological irregularities, often limit their use in monolithically integrated circuits. We show that the micropatterning of organic semiconductors by electron-beam exposure can be used to create high-density (up to around 7.2 million OEETs per  $\text{cm}^2$ ) and mechanically flexible vertical OEET arrays and circuits."

To fabricate their OEET arrays, Kim, Pankow, and their colleagues first exposed both p- and n-channel organic semiconductor films to a direct beam of electrons. This method, known as [electron beam lithography](#) (eBL), allowed them to produce a pattern on the semiconducting films without employing masks or chemical solvents that could damage the materials. This made the films electronically inactive (i.e., insulating) without affecting their ability to conduct ions.

The patterned films resulting from this process were ultra-small and high-density while also presenting well-defined, conducting channel regions. Moreover, the eBL strategy employed by the researchers enabled the effective multilayer integration of OEET structures into arrays and circuits.

"The energetic electrons convert the semiconductor exposed area to an electronic insulator while retaining ionic conductivity and topological continuity with the redox-active unexposed areas essential for monolithic integration," Kim, Pankow, and their colleagues wrote in their paper. "The resulting p- and [n-type](#) vertical OEET active-matrix arrays exhibit transconductances of 0.08–1.7 S, transient times of less than 100  $\mu\text{s}$  and stable switching properties of more than 100,000 cycles."

To further demonstrate the potential of their fabrication strategy, the researchers successfully used it to create various vertically stacked logic circuits based on their OEETs, including NOT, NAND, and NOR gates. The circuits they created were found to perform remarkably well while

also maintaining excellent operational stability.

In the future, this recent study could inform the development of similar approaches to boost the stability and performance of OECT circuits. Moreover, the new e-beam exposure strategy it introduced could facilitate the scalable fabrication of OECTs, contributing to their integration into electronic devices.

**More information:** Jaehyun Kim et al, Monolithically integrated high-density vertical organic electrochemical transistor arrays and complementary circuits, *Nature Electronics* (2024). [DOI: 10.1038/s41928-024-01127-x](https://doi.org/10.1038/s41928-024-01127-x)

© 2024 Science X Network

Citation: A new strategy for fabricating high-density vertical organic electrochemical transistor arrays (2024, March 31) retrieved 1 May 2024 from <https://techxplore.com/news/2024-03-strategy-fabricating-high-density-vertical.html>

This document is subject to copyright. Apart from any fair dealing for the purpose of private study or research, no part may be reproduced without the written permission. The content is provided for information purposes only.