

# Printed 3-D structures based on cellulose nanocrystals

30 May 2017, by Ramona Ronner



Credit: Swiss Federal Laboratories for Materials Science and Technology

Empa researchers have succeeded in developing an environmentally friendly ink for 3-D printing based on cellulose nanocrystals. This technology can be used to fabricate microstructures with outstanding mechanical properties, which have promising potential uses in implants and other biomedical applications.

In order to produce 3-D microstructured materials for automobile components, for instance, Empa researchers have been using a 3-D printing method called "Direct Ink Writing" for the past year (DIW, see box). During this process, a viscous substance – the printing ink – is squeezed out of the printing nozzles and deposited onto a surface, pretty much like a pasta machine. Empa researchers Gilberto Siqueira and Tanja Zimmermann from the Laboratory for Applied Wood Materials have now succeeded, together with colleagues from Harvard University and ETH Zürich, in developing a new, environmentally friendly 3-D printing ink made from [cellulose nanocrystals \(CNC\)](#).


Cellulose, along with lignin and hemicellulose, is one of the main constituents of wood. The biopolymer consists of glucose chains organized in long fibrous structures. In some places the cellulose fibrils exhibit a more ordered structure. "The places with a higher degree of order appear in a more crystalline form. And it is these sections, which we can purify with acid, that we require for our research", explains Siqueira. The final product is [cellulose nanocrystals](#), tiny rod-like structures that are 120 nanometers long and have a diameter of 6.5 nanometers. And it is these nanocrystals that researchers wanted to use to create a new type of environmentally friendly 3-D printing ink. Previous inks contained a rather small proportion of "biological" materials, with a maximum of 2.5 percent CNC. The Empa team wished to increase this proportion, as they have now succeeded in doing – their new inks contain a full 20 percent CNC.

"The biggest challenge was in attaining a viscous elastic consistency that could also be squeezed through the 3-D printer nozzles", says Siqueira. The ink must be "thick" enough so that the printed material stays "in shape" before drying or hardening, and doesn't immediately melt out of shape again. The first CNC mixtures were water-based. This did work in principle, but yielded a very brittle material. Therefore, Siqueira and his colleagues developed a second, polymer-based recipe that had a decisive advantage: after printing and hardening using UV radiation, the CNC "cross-linked" with polymer building blocks, which gave the composite material a significantly higher degree of mechanical rigidity.

## Bringing things together despite resistance

What sounds quite simple in retrospect caused the Empa team a great deal of head-scratching. Siqueira: "Most polymers are water-repellent or hydrophobic, whereas cellulose attracts water – it is hydrophilic. As a result they are not very

compatible." So the researchers first of all had to chemically modify the CNC surface.

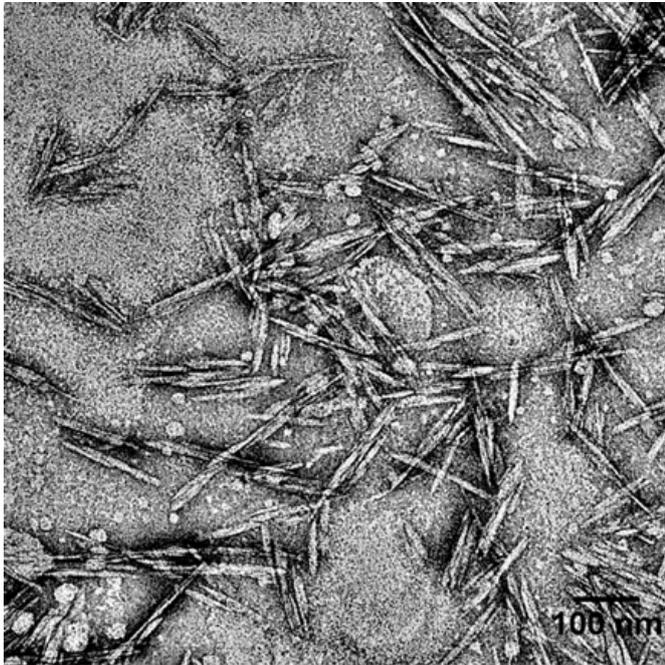

Rod-like cellulose nanocrystals (CNC) approximately 120 nanometers long and 6.5 nanometers in diameter under the microscope. Credit: Empa


After the first attempts at printing and X-ray analysis of the obtained microstructures, the researchers noticed that the CNC in the printed object had aligned itself almost perfectly in the direction it was printed in. They concluded that the mechanical strength used to push the ink through the printing nozzle was sufficient to align it. "It is pretty interesting that one can so easily control the direction of the nanocrystals, for example, if you want to print something that should have a specific mechanical rigidity in a certain direction", says Siqueira.

### Many possibilities

These outstanding mechanical properties represent a decisive advantage compared to other materials such as carbon fibers, which are also used in DIW inks. In addition, the new kind of ink from the Empa lab is made from a renewable material – cellulose.

"Cellulose is the most frequently occurring natural polymer on Earth", says Siqueira. It is not just found in trees, but also in other plants and even in bacteria. The crystals, which are isolated from various cellulose sources, are morphologically different from each other and differ in size, but not in their properties. And they may also be of interest to, for example, the automobile industry or for packaging of any kind. "However, the most important area of application for me is in biomedicine", says Siqueira, "for example in implants or prostheses". The Empa researcher is convinced that the CNC material is suitable for a wide variety of different applications due to its outstanding mechanical properties, as well as the possibility of chemical modification and alignment during printing.

These possibilities are currently being investigated further at Empa. A PhD student is currently focusing on the further development of the [materials](#) and the [printing](#) method for other applications. In addition, a Master's student intends to develop other "biological" inks. "Research in this field is only just beginning", says Gilberto Siqueira. "Printing with biopolymers is currently a very hot topic."

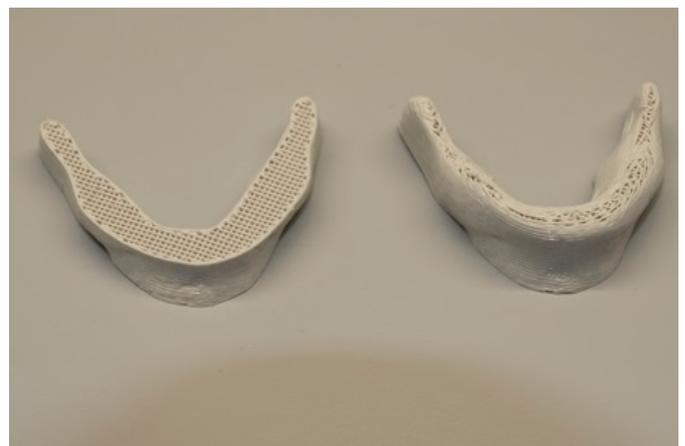

A jaw bone printed with the cellulose ink—the outstanding mechanical properties have promising potential uses in implants and other biomedical applications. Credit: Swiss Federal Laboratories for Materials Science and Technology

Provided by Swiss Federal Laboratories for  
Materials Science and Technology

APA citation: Printed 3-D structures based on cellulose nanocrystals (2017, May 30) retrieved 7  
December 2022 from <https://techxplore.com/news/2017-05-d-based-cellulose-nanocrystals.html>

*This document is subject to copyright. Apart from any fair dealing for the purpose of private study or research, no part may be reproduced without the written permission. The content is provided for information purposes only.*