


# Topology optimization and 3-D printing multimaterial magnetic actuators and displays

23 July 2019, by Thamarasee Jeewandara

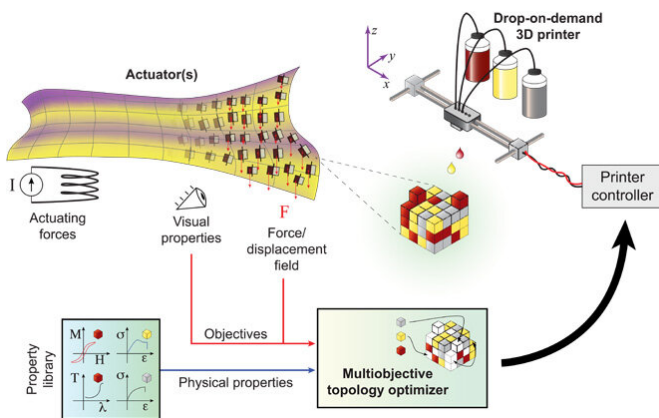


Overview of the specification-driven 3D printing process. The structure of individual actuators (or the arrangement of multiple actuators) is optimized using a multiobjective topology optimization process. Note that, in general, the final optimized structure can be of any arbitrary shape as shown. The optimization uses the bulk physical properties of the individual materials and the functional objectives as inputs. The generated optimized voxel-based representation of the structure is used by the printer to fabricate the optimized structure using a drop-on-demand inkjet printing process. This allows high-dimensional designs to be automatically generated and fabricated with minimal human intervention. In this work, a rigid acrylate polymer (RIG), an elastic acrylate polymer (ELA), and a magnetic nanoparticle ( $\text{Fe}_3\text{O}_4$ )/polymer composite (MPC) are the main materials used. The contrast in the optical, mechanical, and magnetic properties is used to simultaneously optimize the visual appearance and the actuating forces while generating the voxel-level design. Credit: Science Advances, doi: 10.1126/sciadv.aaw1160

In materials science and applied physics, researchers expect actuation systems to perform similarly to natural phenomena. As a classic example, scientists proposed to engineer bioinspired materials that mimicked the

camouflage of cuttlefish, although engineering such highly integrated systems can be challenging due to the combined complexity of generating high-dimensional architectural designs and multifunctional materials associated with their fabrication process. In a recent report on *Science Advances*, Subramanian Sundaram and colleagues in the departments of computer science, artificial intelligence and electrical engineering in the U.S. and France presented a complete protocol on multi-objective topology optimization and multimaterial drop-on-demand three-dimensional (3-D) printing to engineer complex actuators.

The actuators contained soft and rigid polymers coupled to a magnetic nanoparticle/polymer composite that responded to a magnetic field. The topology optimizer could assign materials for individual voxels to enhance the high-resolution physical appearance. When they unified the topology optimized design strategy with the multimaterial [fabrication process](#), Sundaram et al. could engineer complex actuators as a promising route towards automated and goal-driven fabrication.

Modern robots require actuators that integrate multiple functions together inside a single package for optimized height, power efficiency, topology, size and other performance metrics. This idea underlies research proposals that advocate for the tight integration of sensing, actuation and computation with [robotic materials](#). Researchers still debate if robots [will be bodies with brains or brains with bodies](#) and therefore a distinction between materials and machines remains to be established. The new paradigm with robotic materials require robot parts to be designed for multiple functions and optimized for multiple objectives as with natural organisms.

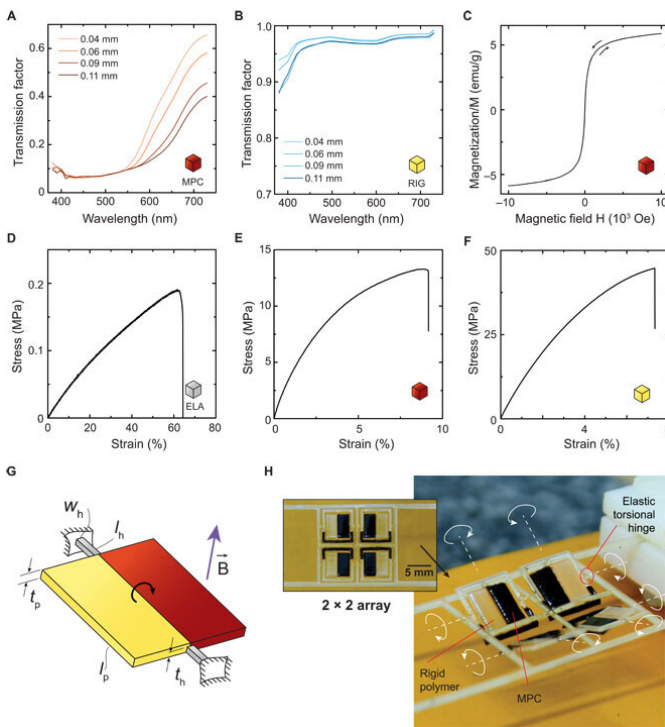

Material property library. (A) The transmission through the MPC shown as a function of the wavelength for films of varying thickness, measured using a spectrophotometer. (B) The transmission through the clear rigid material shown as a function of wavelength for multiple film thicknesses. (C) Magnetization versus applied magnetic field for the MPC measured at room temperature. Magnetic nanoparticles make up ~12% of the overall weight of the MPC. Typical mechanical stress-strain curves for the ELA, MPC, and the rigid polymer (RIG) are shown in (D) to (F), respectively. Elastic moduli of the polymers at linear strains, averaged from three samples each, vary significantly—ELA (528 kPa), MPC (507 MPa), and RIG (1290 MPa). (G) The schematic shows the fundamental hinge-based design with panel length  $l_p$  and thickness  $t_p$ . In this design, the panel is sectioned into two equal portions of RIG and MPC. The panel is attached to rigid boundaries on two sides with ELA torsional hinges of length  $l_h$ , width  $w_h$ , and thickness  $t_h$ . On the application of a magnetic field, the magnetic portion of the panel generates a torque. This is used as the fundamental block in the manually designed samples. (H) Image of a 2 × 2 array of panels each with two axes of rotation. The dark brown regions of the image show the MPC material, and the translucent portions show the rigid materials. The elastic torsional hinges are nearly identical to the rigid polymer in appearance. On the application of a magnetic field, each panel exhibits a unique combination of two-axis angular rotations. The top view of the flat as-printed sample is shown on the left.

(Photo credit: S.S. and D.S.K., MIT.) Credit: Science Advances, doi: 10.1126/sciadv.aaw1160


The challenge with reproducing bioinspired multifunctional systems remains on the design of actuation systems. In the classic example of an [actuation system of a cuttlefish](#), the simultaneous control of both physical deflections and high-resolution appearance results in effective biological camouflage. Reproducing such seamlessly integrated actuation in the lab is cumbersome due to the complexity in creating a high-dimensional design space and fabricating these designs with new materials and free-form geometries.

In contemporary examples of actuation systems, [materials scientists](#) have developed a [digital micromirror device](#) with millions of [identical actuators](#) and a 'millipede' high-density data storage system with microelectromechanical system cantilevers. Optimizing these actuation systems for power consumption, low footprint and process reliability are time consuming, while nonuniform actuator arrays presented additional complexity in the lab. As a promising alternative, [topology optimization techniques](#) offer automatically optimized material layouts in a given design space.

In the present work, Sundaram et al. used a simulated annealing strategy previously used as a successful topology optimization approach to [design truss structures](#). While very generic in theory, the approach accounted specificities of the problem to be effective in practice. In the present approach, Sundaram et al. considered the role of the materials, where the technique was fully fabrication aware. The proposed study on a high resolution, multiphysics and fabrication-aware topology optimization framework is a first strategy implemented in the present work.

The scientists used a [precision manufacturing process](#) capable of handling high-dimensional designs to fabricate the synthetic actuator. Thereafter, they chose a rapid [additive 3-D manufacturing](#) approach for actuator fabrication to produce precise, [complex structures](#) with [diverse materials](#). The rising interest in 3-D printed


actuators is due to their speed and applicability in [micro-/mesoscale robotics](#).

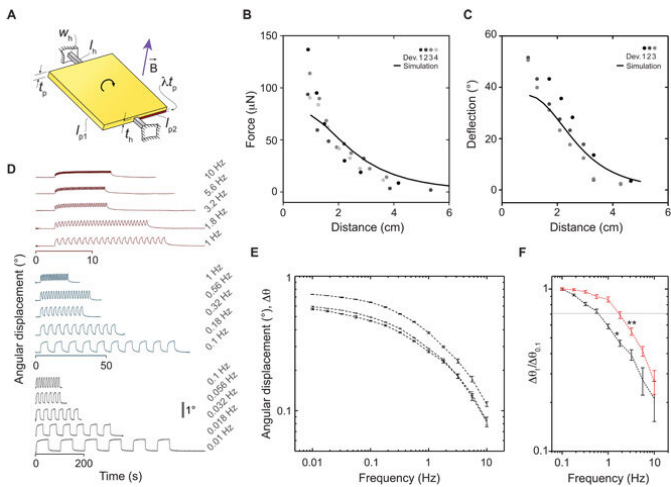

Actuator characteristics—Forces, displacements, and actuation bandwidth. (A) To characterize the actuator performance, the scientists used the fundamental design with a small change. Here, only a fraction of the panel thickness,  $t_p$ , is filled with MPC, denoted by  $\phi$ . The following results were obtained with a rectangular panel of size  $l_{p1} \times l_{p2} = 8 \text{ mm} \times 9 \text{ mm}$ , thickness  $t_p = 1 \text{ mm}$ ,  $\phi = 0.15$ , and hinges with dimensions  $W_h = 0.5 \text{ mm}$ ,  $l_h = 1 \text{ mm}$ , and  $t_h = 0.25 \text{ mm}$ . (B) Measured blocking forces of four identical devices shown as a function of the distance from the  $2\phi$  by  $2\phi$  by  $0.5\phi$  magnet along with corresponding simulation results. (C) Measured angular deflections of three identical devices as a function of distance from the magnet. (D) Optically tracked angular displacements as a function of time for actuation at frequencies from 0.01 to 10 Hz. (E) Angular displacement amplitudes as a function of frequency for three devices. (F) The apparent large-amplitude bandwidth depends on the setup of the magnetic field since the force experienced by the actuator itself varies with the displacement. This is highlighted in this plot with two cases—in one case, the force experienced by the actuator increases monotonically with angular displacement ( $\phi$ ), and in the other case, there is a stable angular displacement when the panel aligns with the direction of maximum gradient ( $\phi\phi$ ). Credit: Science Advances, doi: 10.1126/sciadv.aaw1160

[actuation](#). Sundaram et al. unified a biomimetic evolutionary optimization technique with an automated multimaterial additive manufacturing process to rapidly design and fabricate high-dimensional actuators in the present work. The approach could eventually allow fully automated fabrication of high-dimensional designs, which is a [long-term goal in robotics](#).

The researchers implemented the custom drop-on-demand 3-D printing process to optimize the entire fabrication pipeline and perform fabrication-aware improvements. They designed a specific actuator in a planar, rigid structure with synthetic cells filled in with a transparent rigid polymer or a dark magnetically responsive polymer. The topology optimizer controlled the placement of the two materials relative to their material properties for optimal applications. Sundaram et al. then combined a custom multimaterial drop-on-demand 3-D printing process with multi-objective topology optimization to engineer the high-dimensional actuator designs in the lab. They created a set of ultraviolet (UV)-curable inks with a variety of effects to include optical, magnetic and mechanical properties, then characterized the samples to generate a property library.

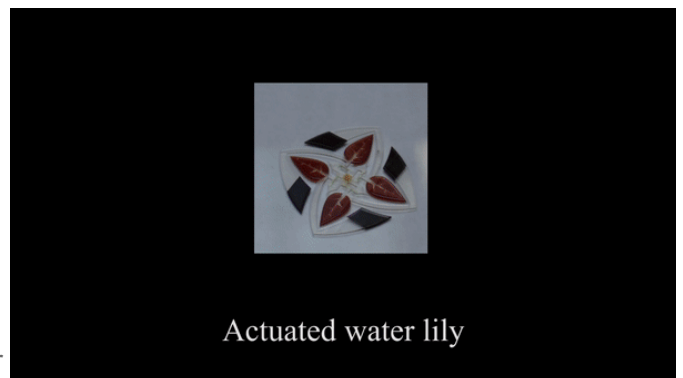


The printed water lily is placed at fluid interfaces and actuated using a permanent magnet. Credit: Science Advances, doi: 10.1126/sciadv.aaw1160

Scientists had previously explored the property of magnetic actuation for soft matter due to favorable scaling, high actuating force density and [untethered](#)

The scientists used a [custom-built ink-jet](#) based multimaterial 3-D printer. They used a rigid acrylate polymer (RIG), an elastic acrylate polymer (ELA)

and a magnetic nanoparticle polymer composite (MPC) alongside optimized starting inks for the inkjet printing process. After ink deposition, they used a UV-light-emitting diode (LED) array to crosslink the ink via [free-radical photopolymerization](#). The three materials contained widely varying elastic moduli and material properties allowing them to make soft joints and rigid structures for use as actuators. The scientists demonstrated their capabilities and fabricated a variety of multimaterial actuator arrays as manually designed. They cycled the designed and engineered actuators for at least 1000 cycles without performance degradation.

Sundaram et al. investigated the applications of 3-D printed multimaterial-based soft magnetic actuators using an electromagnet powered by a current source to generate a tunable magnetic field. As a proof-of-concept, they developed four individual petals for magnetic actuation on an air-water interface, where the petals surfaced from the water interface. For repeatable actuation, they placed the printed samples at a silicone oil-water interface. These manually designed examples were a first to highlight multimaterial additive fabrication coupled with magnetic actuation. The strategy seamlessly integrated multimaterial printing and topology optimization to demonstrate unique, high-resolution optical properties.

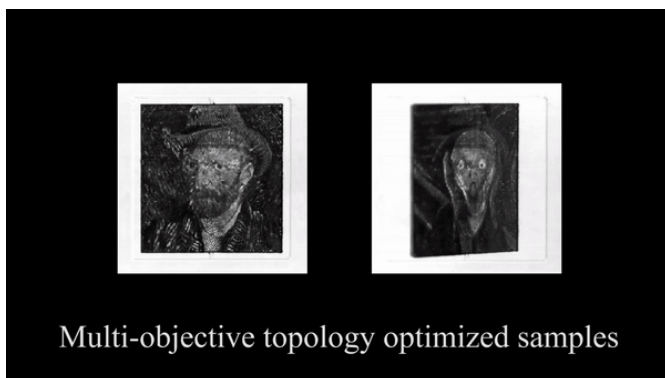

Topology optimization of actuators. Credit: Science Advances, doi: 10.1126/sciadv.aaw1160

The scientists optimized multi-objective topology

using simulation software to understand the distribution of the MPC (Magnetic nanoparticle polymer composite) cells for magnetic actuation. They then applied the method to two different images of paintings that included a self-portrait by Van Gogh and the "Scream" by Munch. After applying the topology optimization framework, they controlled magnetic actuation with an applied magnetic field to gradually transition images from the Van Gogh to the Munch portrait by increasing the tilt/deflection angles. The scientists then characterized the topology-optimized actuator with long-term tests.

In this way, Subramanian Sundaram and colleagues developed a topology optimizer to match the target's optical properties and its tilting angles. The scientists additionally coupled a drop-on-demand inkjet-based 3-D printing with the optimization technique to engineer topology-optimized designs and generate high-resolution optical properties. Although challenges exist in the development of new inks and [materials](#), they could [fabricate a wide-range of materials](#) using the process.

The researchers can design the entire fabrication pipeline for enhanced freedom of control with fabrication-aware optimization. The topology-optimized actuator and the accompanying fabrication toolkit can be used to design actuators with [sensors and basic computing elements](#) to accomplish the long-held vision of multifunctional robotic/autonomic composites with large-scale integration and self-sufficiency. When scientists further explore these foundational strategies, they will be able to form multifunctional actuators with minimal human intervention.

**More information:** Subramanian Sundaram et al. Topology optimization and 3-D printing of multimaterial magnetic actuators and displays, *Science Advances* (2019). [DOI: 10.1126/sciadv.aaw1160](https://doi.org/10.1126/sciadv.aaw1160)

M. A. McEvoy et al. Materials that couple sensing, actuation, computation, and communication, *Science* (2015). [DOI: 10.1126/science.1261689](https://doi.org/10.1126/science.1261689)

Yi?it Mengüç et al. Will robots be bodies with brains

or brains with bodies?, *Science Robotics* (2017).

[DOI: 10.1126/scirobotics.aar4527](https://doi.org/10.1126/scirobotics.aar4527)

Subramanian Sundaram et al. 3-D-Printed Self-Folding Electronics, *ACS Applied Materials & Interfaces* (2017). [DOI: 10.1021/acsami.7b10443](https://doi.org/10.1021/acsami.7b10443)

© 2019 Science X Network

APA citation: Topology optimization and 3-D printing multimaterial magnetic actuators and displays (2019, July 23) retrieved 20 October 2019 from <https://techxplore.com/news/2019-07-topology-optimization-d-multimaterial-magnetic.html>

*This document is subject to copyright. Apart from any fair dealing for the purpose of private study or research, no part may be reproduced without the written permission. The content is provided for information purposes only.*