

Novel tactile display using computer-controlled surface adhesion

November 25 2019

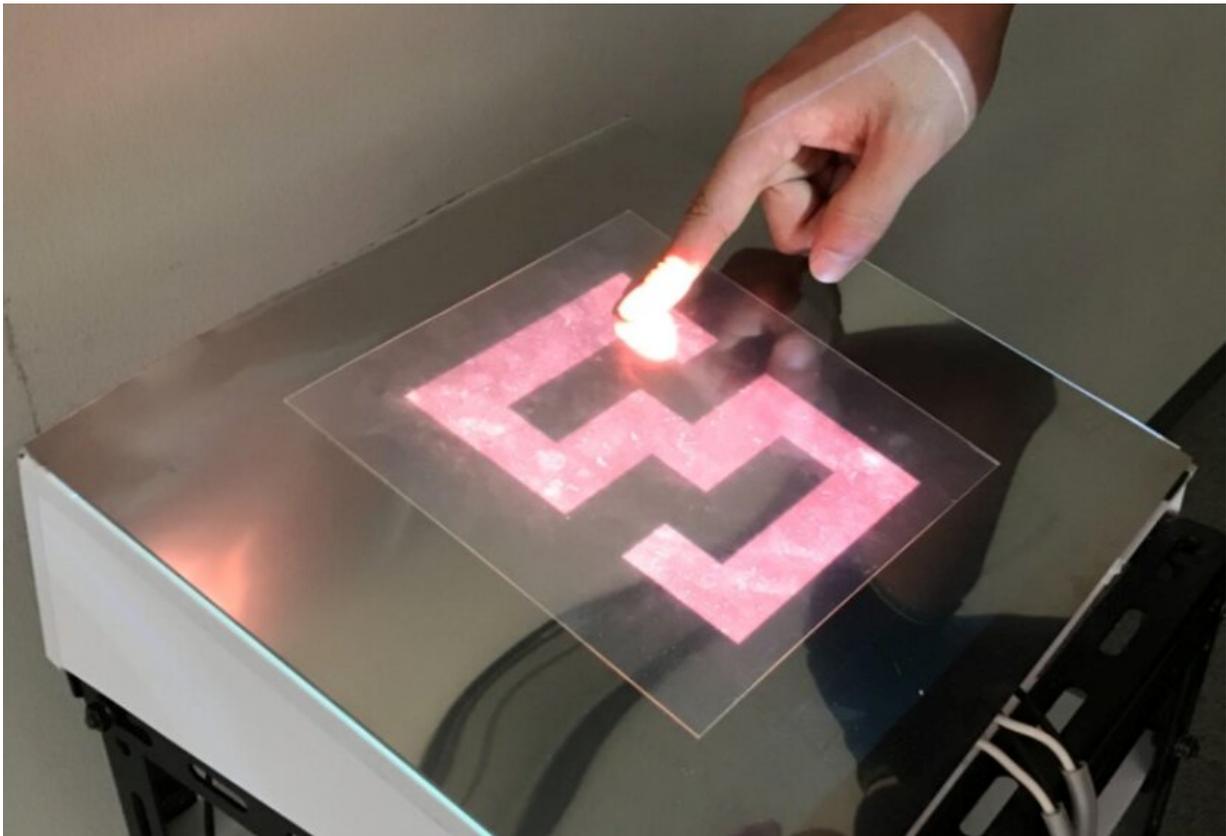


Fig. 1. StickyTouch—The area under the index finger becomes sticky. Credit: Osaka University

A group of researchers at Osaka University developed a novel two-dimensional (2-D) graphical tactile display to which one-dimensional

(1D) adhesive information could be added by controlling adhesion of designated portions of the display surface.

With conventional techniques, it was impossible to perform dynamic and interactive control by changing the shape or friction coefficient of an area on the surface of an electronic device, such as a paper-like screen, in order to enhance its operability. Thus, researchers have made efforts to present further information by using visual presentation that can also deliver other sensory (tactile) content.

In the [entertainment industry](#), such as in video games, displays that give players a sense of [temperature](#) or shock have been proposed so that they can feel as if they were actually in the scene of a game. In particular, many haptic displays and element technologies that give players tactile feedback have been devised.

This group of researchers developed a display in which the [sense of touch](#), i.e., a 1-D "sticky" sensation, can be added to a 2-D vision display. On their display is mounted a temperature sensitive adhesive sheet, a special polymer sheet whose adhesion (friction) can be changed by controlling the temperature of the display surface with a computer.

In order to present changes in adhesion in a range that does not bring a sense of discomfort to a user, the researchers used an adhesive sheet with a boundary temperature of 40 degrees Celsius. The sheet rapidly becomes sticky through heating to a temperature above 40 degrees Celsius, showing the largest adhesion of 2.6 [N/25 millimeters] in the temperature range of 30 degrees Celsius ~ 48 degrees Celsius.

With this display, users can take in both visual and tactile information, something difficult to achieve through ordinary 2-D displays. For example, one can feel a folder and learn its capacity by touching it while navigating the folder hierarchy, which can be preset to vary adhesion by

folder capacity. It is also possible to impede the operability of a device to prevent users from carelessly swiping through content so that they can focus on sections containing important information, which are set to increased [adhesion](#) levels.

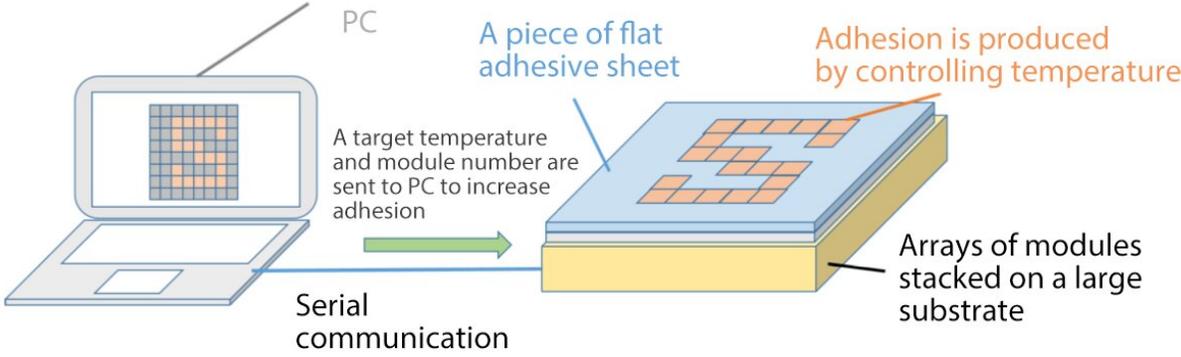


Fig. 2. System overview. Credit: Osaka University

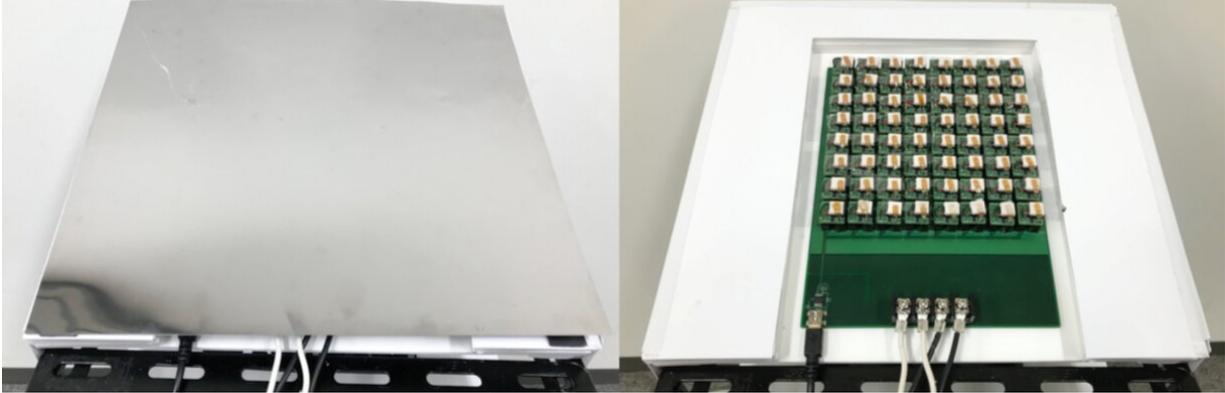


Fig. 3. StickyTouch covered with a stainless-steel plate (left) and StickyTouch uncovered (right). Credit: Osaka University

In addition, it is also possible to apply this technology to touchscreens for people with [visual impairments](#) and allow users who are looking at an image of a sticky object on the screen to feel the displayed object's stickiness as if they were actually touching the object in the image.

Associate Professor Itoh says, "This graphical tactile system allows users to get 'touch and feel' information that would be difficult to perceive on a visual [display](#). We will consider applications to entertainment and digital signage to pursue its commercial viability."

The research results were presented at SIGGRAPH ASIA 2019 Emerging Technologies.

Provided by Osaka University

Citation: Novel tactile display using computer-controlled surface adhesion (2019, November 25) retrieved 24 April 2024 from

<https://techxplore.com/news/2019-11-tactile-computer-controlled-surface-adhesion.html>

This document is subject to copyright. Apart from any fair dealing for the purpose of private study or research, no part may be reproduced without the written permission. The content is provided for information purposes only.