


Scientists improve 3-D printing technology for aerospace composites using oil waste

25 November 2020

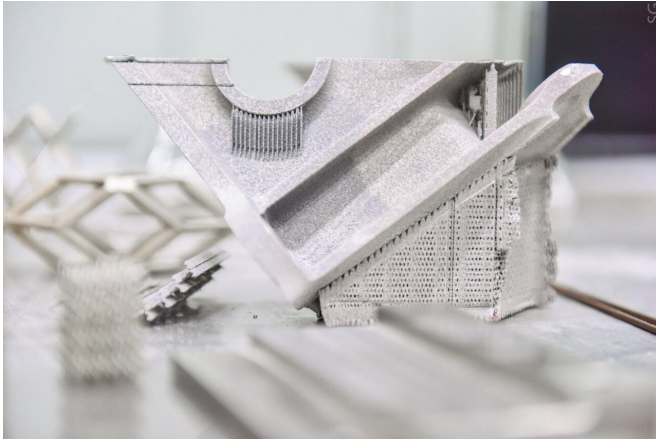

Aviation parts printed on a 3D printer from new metal powders Credit: Sergey Gnuskov/NUST MISIS

Scientists from NUST MISIS have improved the technology of 3-D printing from aluminum, having achieved an increase in the hardness of products by 1.5 times. The nanocarbon additive to aluminum powder, which they have developed, obtained from the products of processing associated petroleum gas, will improve the quality of 3-D printed aerospace composites. The research results are published in the international scientific journal *Composites Communications*

Today, the main field of application for aluminum 3-D printing is the creation of high-tech parts for the aviation and space industries. The presence of even the slightest defects in printed structures is critical to the safety of the technology being created. According to NUST MISIS scientists, the main risk of such defects is the high porosity of the material, caused, among other reasons, by the qualities of the original [aluminum](#) powder. To ensure a uniform and dense microstructure of printed products, scientists from the MISIS Catalis Lab proposed adding [carbon nanofibers](#) to the [aluminum powder](#). The use of this modifying

additive makes it possible to ensure a low porosity of the material and an increase in its hardness by 1.5 times.

"Changing the chemical and phase composition of the [powder](#) for printing by introducing additional components into the main matrix allows improving its properties. In particular, carbon nanofibers have [high thermal conductivity](#), which helps to minimize temperature gradients between printed layers during product synthesis, at the stage of selective laser melting. Thanks to this, the microstructure of the material can be almost completely eliminated from inhomogeneities," said the head of the laboratory, professor at NUST MISIS, Ph.D. Alexander Gromov.

"The technology for the synthesis of nanocarbon additives developed by the research team includes methods of chemical deposition, ultrasonic treatment, and IR heat treatment. The used carbon nanofibers must be a by-product of associated petroleum gas processing. During its catalytic decomposition, carbon accumulates in the form of nanofibers on dispersed metal particles of the catalyst. Usually, at present, associated gases are simply burned in the fields, which harms the environment. Therefore, the application of the new method also has a serious environmental significance," said Professor Gromov. The study has been carried out jointly with specialists from the Boreskov Institute of Catalysis SB RAS. In the future, the research team plans to determine the optimal conditions for selective laser melting of new composite powders, as well as to develop a technology for post-processing and industrial use of synthesized products.

More information: E.L. Dzidziguri et al, In-situ synthesis and characterization of powdery nanocomposite "carbon nanotubes/nanoalumina", *Composites Communications* (2020). [DOI: 10.1016/j.coco.2020.100534](https://doi.org/10.1016/j.coco.2020.100534)

Provided by National University of Science and
Technology MISIS

APA citation: Scientists improve 3-D printing technology for aerospace composites using oil waste (2020, November 25) retrieved 18 October 2021 from <https://techxplore.com/news/2020-11-scientists-d-technology-aerospace-composites.html>

This document is subject to copyright. Apart from any fair dealing for the purpose of private study or research, no part may be reproduced without the written permission. The content is provided for information purposes only.