


# One-step method to improve performance of cathode materials in Na-ion batteries

24 May 2021, by Li Yuan

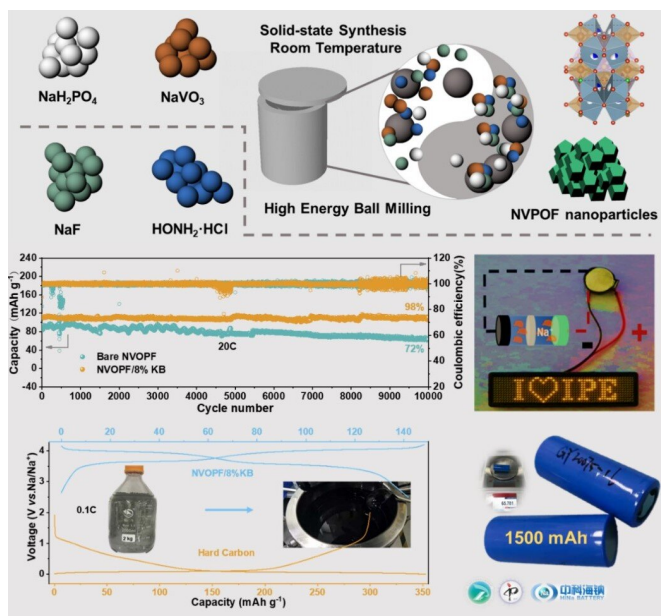

The electrochemical performance of sodium vanadium fluorophosphate synthesized by mechanochemical method. Credit: Chinese Academy of Sciences

Na-ion batteries are promising in large-scale energy storage owing to the abundant raw material resources, low cost and high safety.

Sodium vanadium fluorophosphate ( $\text{Na}_3(\text{VOPO}_4)_2\text{F}$ ) with a theoretical energy density of 480 Wh/Kg is regarded as a strong candidate among various cathode materials. However, the intrinsic low conductivity and high energy-consumption during synthesis process hinder its commercialization.

Researchers from the Institute of Process Engineering (IPE) and Institute of Physics of the Chinese Academy of Sciences developed one-step mechanochemical method to rapidly prepare the polyanionic compound sodium vanadium fluorophosphate as the cathode materials for Na-

ion batteries, which exhibited excellent rate performance and cycle stability.

This work was published in *Nature Communications* on May 14.

The prepared  $\text{Na}_3(\text{VOPO}_4)_2\text{F}/\text{KB}$  composite delivered a high discharge capacity of 142 mAh g<sup>-1</sup> at 0.1C. The extra capacity beyond the theoretical specific capacity (130 mAh g<sup>-1</sup>) benefited from the interfacial charge storage.

Moreover, a specific capacity of 112 mAh g<sup>-1</sup> can be obtained even at 20 C, which means this Na-ion battery could be fully charged/discharged in three minutes.

Superior cycle stability of this composite was demonstrated by an ultrahigh cycling stability with 98% retention over 10,000 cycles.

High resolution transmission electron microscopy revealed that the nanocrystallines of  $\text{Na}_3(\text{VOPO}_4)_2\text{F}$  about 30 nm were embedded in the carbon framework, which facilitated the rapid conduction of electrons and Na ions.

The reversible structural evolution and negligible volume change of  $\text{Na}_3(\text{VOPO}_4)_2\text{F}/\text{KB}$  composite during charging/discharging were also demonstrated by in situ X-ray diffraction and <sup>23</sup>Na nuclear magnetic resonance spectrum.

"The method provides a feasible strategy to improve the rate performance and [cycle](#) performance of cathode materials. Besides, the kilogram-scale product indicates the mechanochemical method is suitable for rapid large-scale production electrode materials for Na-ion batteries," said Prof. Zhao Junmei, a co-corresponding author of the study.

**More information:** Xing Shen et al, Rapid mechanochemical synthesis of polyanionic cathode

with improved electrochemical performance for Na-ion batteries, *Nature Communications* (2021). DOI: [10.1038/s41467-021-23132-w](https://doi.org/10.1038/s41467-021-23132-w)

Provided by Chinese Academy of Sciences

APA citation: One-step method to improve performance of cathode materials in Na-ion batteries (2021, May 24) retrieved 28 September 2021 from <https://techxplore.com/news/2021-05-one-step-method-cathode-materials-na-ion.html>

*This document is subject to copyright. Apart from any fair dealing for the purpose of private study or research, no part may be reproduced without the written permission. The content is provided for information purposes only.*